

N Female Bulkhead to SMA Male Low Loss Cable Using LMR-195 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet


PE3W08275/HS

Configuration

- Connector 1: N Female Bulkhead
- Connector 2: SMA Male
- Cable Type: LMR-195

Features

- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Double Shielded
- PE Jacket

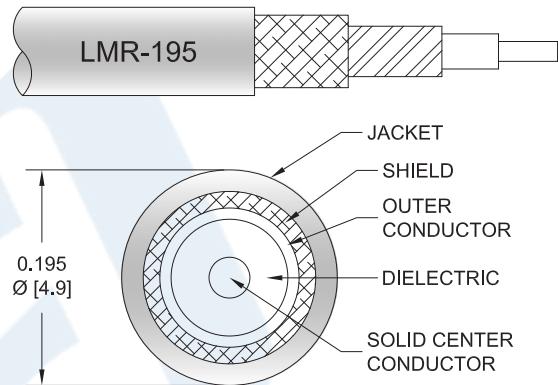

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W08275/HS type N female bulkhead to SMA male cable using LMR-195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to SMA cable assembly has a female to male gender configuration with 50 ohm flexible LMR-195 coax. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to SMA Male Low Loss Cable Using LMR-195 Coax with HeatShrink PE3W08275/HS](#)

N Female Bulkhead to SMA Male Low Loss Cable Using LMR-195 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W08275/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		80		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.6 [24.93]		$\Omega/1000\text{ft}$ [Ω/Km]
DC Resistance Outer Conductor		4.9 [16.08]		$\Omega/1000\text{ft}$ [Ω/Km]
Jacket Spark			3,000	Vrms

Mechanical Specifications

Cable Assembly

Weight	0.121 lbs [54.88 g]
Cable	
Cable Type	LMR-195
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to SMA Male Low Loss Cable Using LMR-195 Coax with HeatShrink PE3W08275/HS](#)

N Female Bulkhead to SMA Male Low Loss Cable Using LMR-195 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W08275/HS

Connectors

Description	Connector 1	Connector 2
Type	N Female Bulkhead	SMA Male
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating		Brass, Gold
Contact Plating Specification		50 μ in minimum
Dielectric Type		PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100 μ in minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 μ in minimum
Hex Size		16-May inch
Torque		3 in-lbs [0.34 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to SMA Male Low Loss Cable Using LMR-195 Coax with HeatShrink PE3W08275/HS](#)

N Female Bulkhead to SMA Male Low Loss Cable
Using LMR-195 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W08275/HS

How to Order

Part Number Configuration:

PE3W08275/HS - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W08275/HS-12 = 12 inches long cable
PE3W08275/HS-100cm = 100 cm long cable

N Female Bulkhead to SMA Male Low Loss Cable Using LMR-195 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to SMA Male Low Loss Cable Using LMR-195 Coax with HeatShrink PE3W08275/HS](#)

URL: <https://www.pasternack.com/n-female-bulkhead-to-sma-male-low-loss-cable-using-lmr-195-with-heatshrink-pe3w08275-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W08275/HS CAD Drawing

N Female Bulkhead to SMA Male Low Loss Cable Using LMR-195 Coax with HeatShrink

