



## SMA Male to TNC Male Cable 200 cm Using RG58 Coax

### RF Cable Assemblies Technical Data Sheet



PE3W08372-200CM

#### Configuration

- Connector 1: SMA Male
- Connector 2: TNC Male
- Cable Type: RG58

#### Features

- Max Frequency 5 GHz
- 65.9% Phase Velocity
- PVC (NC) Jacket

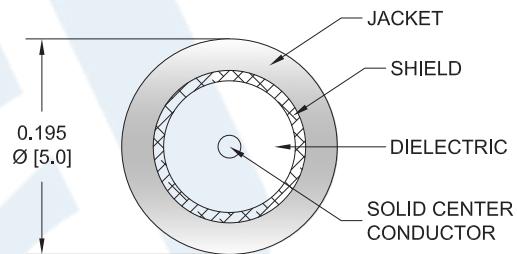

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W08372-200CM SMA male to TNC male 200 cm cable using RG58 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to TNC cable assembly has a male to male gender configuration with 50 ohm flexible RG58 coax. The PE3W08372-200CM SMA male to TNC male cable assembly operates to 5 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Male Cable 200 cm Using RG58 Coax PE3W08372-200CM](#)



## SMA Male to TNC Male Cable 200 cm Using RG58 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W08372-200CM**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5	GHz
VSWR			1.5:1	
Velocity of Propagation		65.9		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5	GHz
Insertion Loss (Max.)	0.75	1.08	1.62	3.09	5.55	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.1 dB per SMA male and TNC male connector.

#### Mechanical Specifications

##### Cable Assembly

Length*	78.74 in [200 cm]
Diameter	0.6 in [15.24 mm]

##### Cable

Cable Type	RG58
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Tin
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.195 in [4.95 mm]

One Time Minimum Bend Radius	0.98 in [24.89 mm]
Repeated Minimum Bend Radius	1.96 in [49.78 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Male Cable 200 cm Using RG58 Coax PE3W08372-200CM](#)



## SMA Male to TNC Male Cable 200 cm Using RG58 Coax

### RF Cable Assemblies Technical Data Sheet

PE3W08372-200CM

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	TNC Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	ASTM B488	
Dielectric Type	Teflon	Teflon
Outer Conductor Material and Plating	Passivated Stainless Steel	Brass, Silver
Body Material and Plating	Passivated Stainless Steel	Brass, Silver
Coupling Nut Material and Plating	Passivated Stainless Steel	Brass, Silver
Hex Size	5/16 Inch	
Seal Gasket Material	Silicone	Silicone

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Male Cable 200 cm Using RG58 Coax PE3W08372-200CM](#)



## SMA Male to TNC Male Cable 200 cm Using RG58 Coax

### RF Cable Assemblies Technical Data Sheet

PE3W08372-200CM

#### How to Order

Part Number Configuration:

**PE3W08372**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W08372-12 = 12 inches long cable  
PE3W08372-100cm = 100 cm long cable

SMA Male to TNC Male Cable 200 cm Using RG58 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Male Cable 200 cm Using RG58 Coax PE3W08372-200CM](#)

URL: <https://www.pasternack.com/sma-male-tnc-male-rg58cu-cable-assembly-pe3w08372-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3W08372-200CM CAD Drawing**  
SMA Male to TNC Male Cable 200 cm Using RG58 Coax

REVISIONS					
REV.	DESCRIPTION	DATE	APPROVED		
A	INITIAL RELEASE	1/24/2020	S.ELLIS		

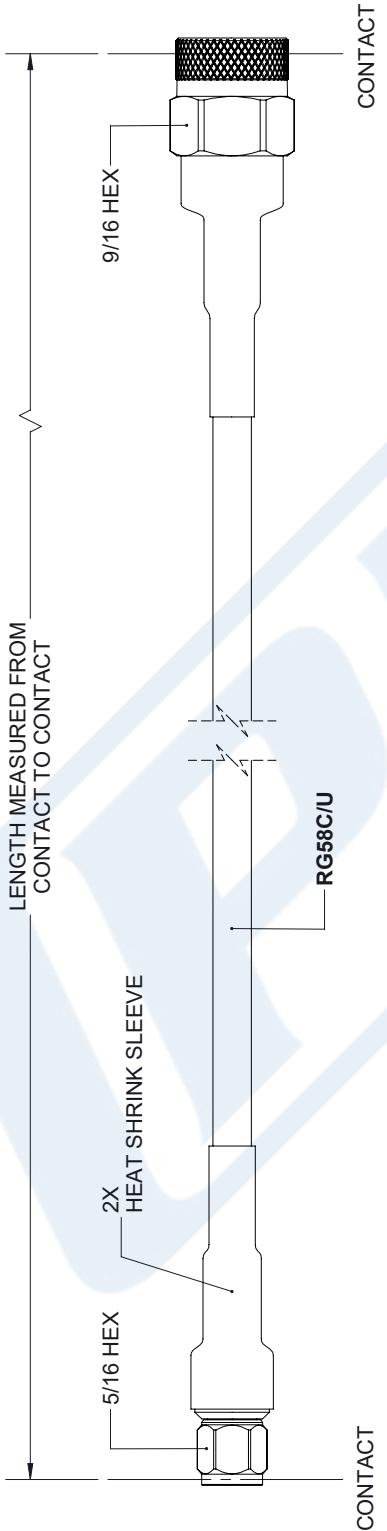

SMA MALE

TNC MALE

CONTACT

		THIRD-ANGLE PROJECTION	
		THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.	
PASTERNAK®	an INFINITE® brand	Pasterнак Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920   1.866.727.8376 Fax: 1.949.261.7451 Website: <a href="http://www.pasterнак.com">www.pasterнак.com</a> E-mail: <a href="mailto:sales@pasterнак.com">sales@pasterнак.com</a>	SHEET 1 OF 1
SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	K. DANG	PE3W08372
SCALE			N/A
REV			A

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS  
TOLERANCES:

X = ± 2 [5.08]	FRACTIONS
.XX = ± .02 [ .51 ]	± 1/32
XXX = ± .005 [ .13 ]	ANGLES ± 1°
CABLE LENGTH (L) TOLERANCES:	
L ≤ 12 [305] = +1 [25] / -0	
12 [305] < L ≤ 60 [1524] = +2 [51] / -0	
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0	
300 [7620] < L = +5% L / -0	

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE  
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.