



SMA Male Right Angle to QN Female Bulkhead Cable 48 Inch Using PE-SR402FLJ Coax

RF Cable Assemblies Technical Data Sheet


PE3W08408-48

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: QN Female Bulkhead
- Cable Type: PE-SR402FLJ

Features

- Max Frequency 10 GHz
- Shielding Effectivity > 100 dB
- 70% Phase Velocity
- FEP Jacket

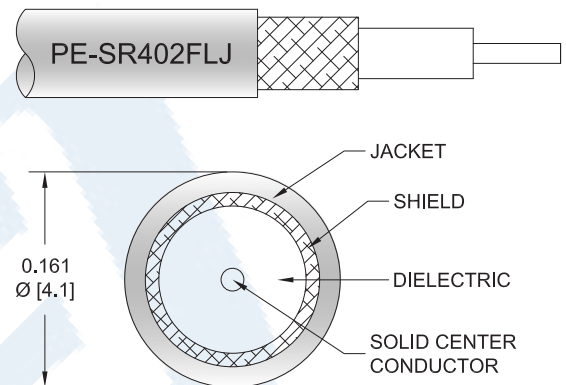

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W08408-48 SMA male right angle to QN female bulkhead 48 inch cable using PE-SR402FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to QN cable assembly has a male to female gender configuration with 50 ohm formable PE-SR402FLJ coax. The PE3W08408-48 SMA male to QN female cable assembly operates to 10 GHz. The right angle SMA interface on the PE-SR402FLJ cable allows for easier connections in tight spaces. Our RF cable assembly with QN bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to QN Female Bulkhead Cable 48 Inch Using PE-SR402FLJ Coax PE3W08408-48](#)



SMA Male Right Angle to QN Female Bulkhead
Cable 48 Inch Using PE-SR402FLJ Coax

RF Cable Assemblies Technical Data Sheet

PE3W08408-48

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.5:1	
Velocity of Propagation		70		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.23 [27]		Ω /1000ft [Ω /Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	10	GHz
Insertion Loss (Max.)	0.64	0.8	1.1	1.58	2.23	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.2 dB per SMA male right angle connector and 0.1 dB per QN female bulkhead connector.

Mechanical Specifications

Cable Assembly

Length* 48 in [121.92 cm]
Diameter 0.67 in [17.02 mm]

Cable

Cable Type PE-SR402FLJ
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Tinned Copper Braid
Jacket Material FEP, Black
Jacket Diameter 0.161 in [4.09 mm]

One Time Minimum Bend Radius 0.315 in [8 mm]
Repeated Minimum Bend Radius 1.575 in [40.01 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to QN Female Bulkhead Cable 48 Inch Using PE-SR402FLJ Coax PE3W08408-48](#)



SMA Male Right Angle to QN Female Bulkhead
Cable 48 Inch Using PE-SR402FLJ Coax

RF Cable Assemblies Technical Data Sheet

PE3W08408-48

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	QN Female Bulkhead
Impedance	50 Ohms	50 Ohms
Mating Cycles		100
Contact Material and Plating	Brass, Gold over Nickel	Spring Bronze, Gold over Nickel
Contact Plating Specification		0.15 µm minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Gold over Nickel	Brass, Tri-Metal
Body Material and Plating	Brass, Gold over Nickel	Brass, Tri-Metal
Coupling Nut Material and Plating	Passivated Stainless Steel	
Hex Size	5/16 inch	
Torque	8 in-lbs [0.9 Nm]	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to QN Female Bulkhead Cable 48 Inch Using PE-SR402FLJ Coax PE3W08408-48](#)



SMA Male Right Angle to QN Female Bulkhead
Cable 48 Inch Using PE-SR402FLJ Coax

RF Cable Assemblies Technical Data Sheet

PE3W08408-48

How to Order

Part Number Configuration:

PE3W08408

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W08408-12 = 12 inches long cable
PE3W08408-100cm = 100 cm long cable

SMA Male Right Angle to QN Female Bulkhead Cable 48 Inch Using PE-SR402FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to QN Female Bulkhead Cable 48 Inch Using PE-SR402FLJ Coax PE3W08408-48](https://www.pasternack.com/sma-male-qn-female-pe-sr402flj-cable-assembly-pe3w08408-48-p.aspx)


URL: <https://www.pasternack.com/sma-male-qn-female-pe-sr402flj-cable-assembly-pe3w08408-48-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W08408-48 CAD Drawing

SMA Male Right Angle to QN Female Bulkhead Cable 48 Inch Using PE-SR402FLJ Coax

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	1/28/2020
		APPROVED
		S. ELLIS

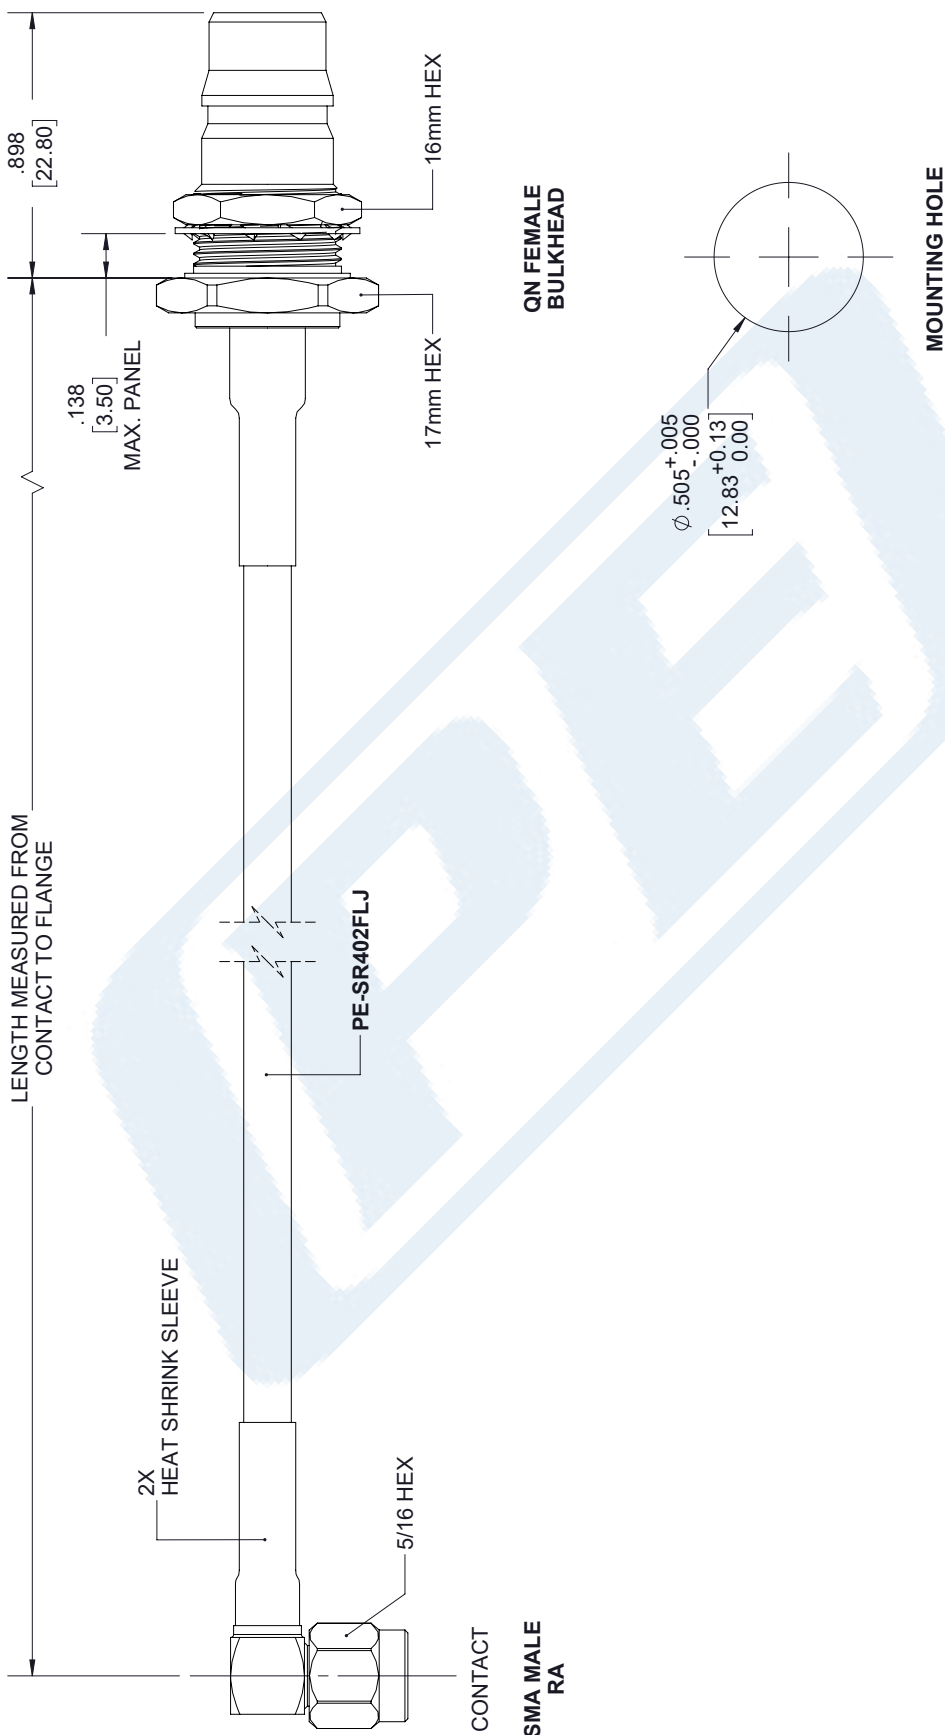

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

PE PASTERNAK
an INFINITI brand

Pasternack Enterprises, Inc.
P. O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2	[5.08]	FRACTIONS
.XX = ±.02	[.51]	± 1/32
.XXX = ±.005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12	[305]	= +1 [25] / -0
12 [305] < L ≤ 60	[1524]	= +2 [51] / -0
60 [1524] < L ≤ 120	[3048]	= +4 [102] / -0
120 [3048] < L ≤ 300	[7620]	= +6 [152] / -0
300 [7620] < L ≤ ∞		= +5% / L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

ITEM NO. PE3W08408

SIZE A

CAGE CODE 53919

DRAWN BY K. DANG

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.