



BNC Male to SMC Plug Cable Using RG196 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet



PE3W08672LF

Configuration

- Connector 1: BNC Male
- Connector 2: SMC Plug
- Cable Type: RG196

Features

- Max Frequency 1 GHz
- PTFE Jacket

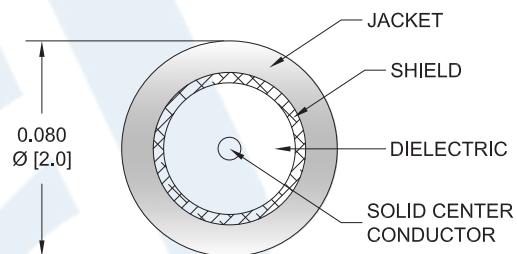

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W08672LF BNC male to SMC plug cable using RG196 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to SMC cable assembly has a male to plug gender configuration with 50 ohm flexible RG196 coax. The PE3W08672LF BNC male to SMC plug cable assembly operates to 1 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMC Plug Cable Using RG196 Coax , LF Solder PE3W08672LF](#)



BNC Male to SMC Plug Cable Using RG196 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W08672LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Capacitance		32 [104.99]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	400					MHz
Insertion Loss (Typ.)	0.33					dB/ft
	1.08					dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.053 lbs [24.04 g]

Cable

Cable Type RG196
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Silver Plated Copper Braid
 Jacket Material PTFE, White
 Jacket Diameter 0.08 in [2.03 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMC Plug Cable Using RG196 Coax , LF Solder PE3W08672LF](#)



BNC Male to SMC Plug Cable Using RG196 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W08672LF

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	SMC Plug
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in minimum
Hex Size		1/4 inch

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMC Plug Cable Using RG196 Coax , LF Solder PE3W08672LF](#)



BNC Male to SMC Plug Cable Using RG196 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W08672LF

How to Order

Part Number Configuration:

PE3W08672LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W08672LF-12 = 12 inches long cable
PE3W08672LF-100cm = 100 cm long cable

BNC Male to SMC Plug Cable Using RG196 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMC Plug Cable Using RG196 Coax , LF Solder PE3W08672LF](#)

URL: <https://www.pasternack.com/bnc-male-to-smc-plug-cable-using-rg196-lf-solder-pe3w08672lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

