

TNC Female Bulkhead to SSMA Male Right Angle Cable Using RG316 Coax



RF Cable Assemblies Technical Data Sheet



PE3W08919

Configuration

- Connector 1: TNC Female Bulkhead
- Connector 2: SSMA Male Right Angle
- Cable Type: RG316

Features

- Max Frequency 1 GHz
- 69% Phase Velocity
- FEP Jacket

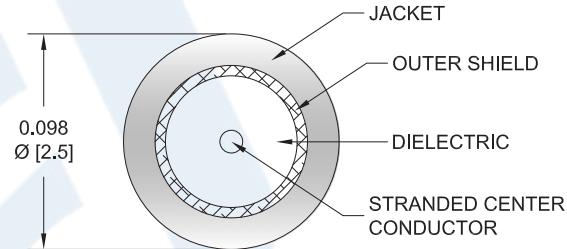

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W08919 TNC female bulkhead to SSMA male right angle cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to SSMA cable assembly has a female to male gender configuration with 50 ohm flexible RG316 coax. The PE3W08919 TNC female to SSMA male cable assembly operates to 1 GHz. The right angle SSMA interface on the RG316 cable allows for easier connections in tight spaces. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to SSMA Male Right Angle Cable Using RG316 Coax PE3W08919](#)

TNC Female Bulkhead to SSMA Male Right Angle Cable Using RG316 Coax



RF Cable Assemblies Technical Data Sheet

PE3W08919

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Velocity of Propagation	69			%
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.075	0.11	0.16	0.238	0.38	dB/ft
	0.25	0.36	0.52	0.78	1.25	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the female connector and 0.2 dB for the male connector.

Mechanical Specifications

Cable Assembly

Weight	0.063 lbs [28.58 g]
Cable	
Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver PTFE
Dielectric Type	1
Number of Shields	Silver Plated Copper Braid
Shield Layer 1	FEP, Tan
Jacket Material	0.102 in [2.59 mm]
Jacket Diameter	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to SSMA Male Right Angle Cable Using RG316 Coax PE3W08919](#)

TNC Female Bulkhead to SSMA Male Right Angle Cable Using RG316 Coax



RF Cable Assemblies Technical Data Sheet

PE3W08919

Connectors

Description	Connector 1	Connector 2
Type	TNC Female Bulkhead	SSMA Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Gold
Contact Plating Specification	30 μ in minimum	MIL-G-45204
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Nickel	
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	QQ-N-290
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		QQ-N-290
Hex Size		1/4 inch
Torque		3 in-lbs [0.34 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to SSMA Male Right Angle Cable Using RG316 Coax PE3W08919](#)

TNC Female Bulkhead to SSMA Male Right Angle Cable Using RG316 Coax



RF Cable Assemblies Technical Data Sheet

PE3W08919

How to Order

Part Number Configuration:

PE3W08919- **xx****uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length
Base Number

Example: PE3W08919-12 = 12 inches long cable
PE3W08919-100cm = 100 cm long cable

TNC Female Bulkhead to SSMA Male Right Angle Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to SSMA Male Right Angle Cable Using RG316 Coax PE3W08919](#)

URL: <https://www.pasternack.com/tnc-female-bulkhead-to-ssma-male-cable-using-rg316-pe3w08919-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

