

BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet


PE3W08933/HS

Configuration

- Connector 1: BNC Male Right Angle
- Connector 2: N Male
- Cable Type: RG58

Features

- Max Frequency 1 GHz
- 65.9% Phase Velocity
- PVC (NC) Jacket

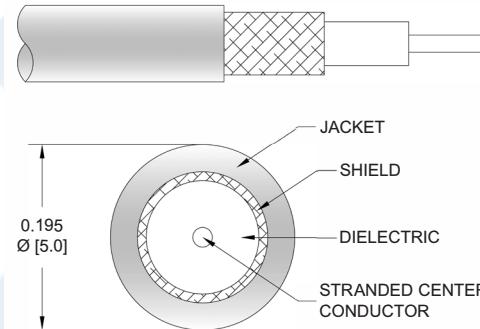

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W08933/HS BNC male right angle to type N male cable using RG58 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG58 coax. The PE3W08933/HS BNC male to type N male cable assembly operates to 1 GHz. The right angle BNC interface on the RG58 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink PE3W08933/HS](#)

BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W08933/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		65.9		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.029	0.049	0.074	0.116	0.2	dB/ft
	0.1	0.16	0.24	0.38	0.66	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight	0.177 lbs [80.29 g]
--------	---------------------

Cable

Cable Type	RG58
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Tin
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.98 in [24.89 mm]
Repeated Minimum Bend Radius	1.96 in [49.78 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink PE3W08933/HS](#)



BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W08933/HS

Connectors

Description	Connector 1	Connector 2
Type	BNC Male Right Angle	N Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in minimum

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink PE3W08933/HS](#)

BNC Male Right Angle to N Male Cable
Using RG58 Coax with HeatShrink




RF Cable Assemblies Technical Data Sheet

PE3W08933/HS

How to Order

Part Number Configuration:

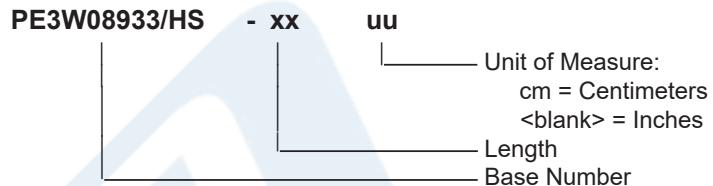

Example: PE3W08933/HS-12 = 12 inches long cable
PE3W08933/HS-100cm = 100 cm long cable

BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink PE3W08933/HS](#)

URL: <https://www.pasternack.com/bnc-male-right-angle-to-n-male-cable-using-rg58-with-heatshrink-pe3w08933-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W08933/HS CAD Drawing

BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink

F

E

D

C

B

A

ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
ZONE A	INITIAL RELEASE		01/25/2023	BPUCHASKI	AGANWANI

1

REVISION


2

3

4

5

6

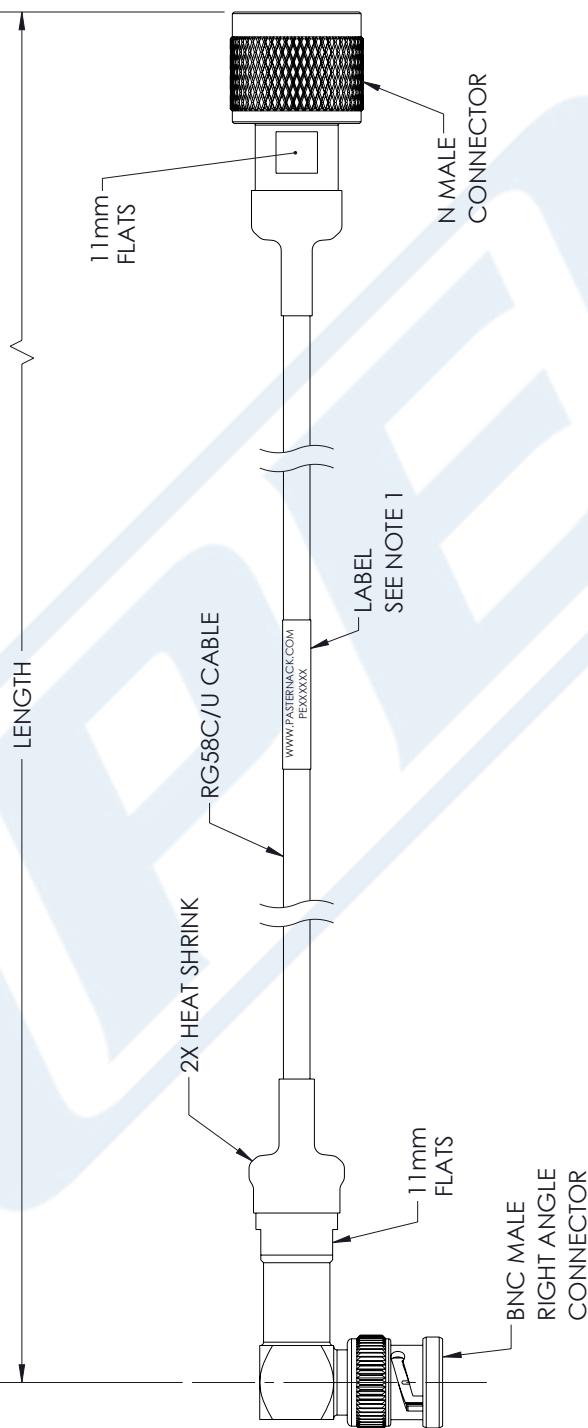

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS , ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW IS PROHIBITED.

BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink

REV A

 PASTERNAK an INFINITI® brand	INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE NONE	WEBSITE: www.Pasterнак.com PHONE: 1.866.727.8376 1.949.261.1920	DESCRIPTION BNC Male Right Angle to N Male Cable Using RG58 Coax with HeatShrink	SHEET 1 OF 1	REV A