

## SMA Male to BNC Male Right Angle Cable Using RG174 Coax with HeatShrink



### RF Cable Assemblies Technical Data Sheet



**PE3W09567/HS**

#### Configuration

- Connector 1: SMA Male
- Connector 2: BNC Male Right Angle
- Cable Type: RG174

#### Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

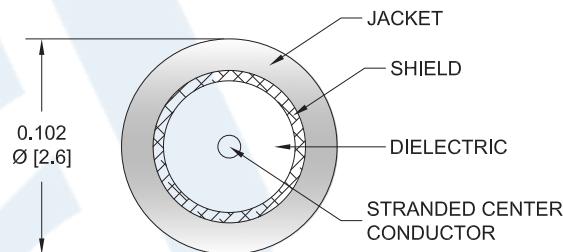

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W09567/HS SMA male to BNC male right angle cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG174 coax. The PE3W09567/HS SMA male to BNC male cable assembly operates to 1 GHz. The right angle BNC interface on the RG174 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Right Angle Cable Using RG174 Coax with HeatShrink PE3W09567/HS](#)



## SMA Male to BNC Male Right Angle Cable Using RG174 Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W09567/HS**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Velocity of Propagation		66		%
Capacitance		31.08 [101.97]		pF/ft [pF/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.066	0.084	0.137	0.211	0.32	dB/ft
	0.22	0.28	0.45	0.69	1.05	dB/m

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the SMA male connector and 0.2 dB for the BNC male connector.

#### Mechanical Specifications

##### Cable Assembly

Weight 0.088 lbs [39.92 g]

##### Cable

Cable Type RG174  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper Clad Steel  
 Dielectric Type PE  
 Number of Shields 1  
 Shield Layer 1 Tinned Copper Braid  
 Jacket Material PVC, Black  
 Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Right Angle Cable Using RG174 Coax with HeatShrink PE3W09567/HS](#)



## SMA Male to BNC Male Right Angle Cable Using RG174 Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W09567/HS**

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	BNC Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Silver
Contact Plating Specification	30 $\mu$ in minimum	ASTM-B700
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 $\mu$ in minimum	ASTM-B689
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 $\mu$ in minimum	ASTM-B689
Hex Size	5/16 inch	
Torque	3 in-lbs [0.34 Nm]	

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +80 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Right Angle Cable Using RG174 Coax with HeatShrink PE3W09567/HS](#)

SMA Male to BNC Male Right Angle Cable  
Using RG174 Coax with HeatShrink




**RF Cable Assemblies Technical Data Sheet**

**PE3W09567/HS**

**How to Order**

Part Number Configuration:

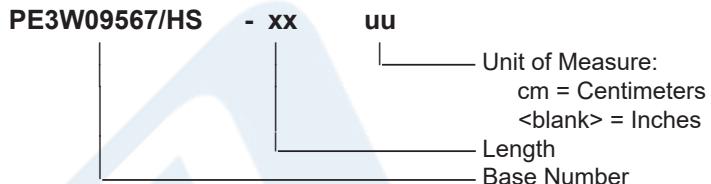

Example: PE3W09567/HS-12 = 12 inches long cable  
PE3W09567/HS-100cm = 100 cm long cable

SMA Male to BNC Male Right Angle Cable Using RG174 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Right Angle Cable Using RG174 Coax with HeatShrink PE3W09567/HS](#)


URL: <https://www.pasternack.com/sma-male-to-bnc-male-cable-using-rg174-with-heatshrink-pe3w09567-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W09567/HS CAD Drawing

## SMA Male to BNC Male Right Angle Cable Using RG174 Coax with HeatShrink

ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	12/19/2022	HBAKKE	AGANWANI

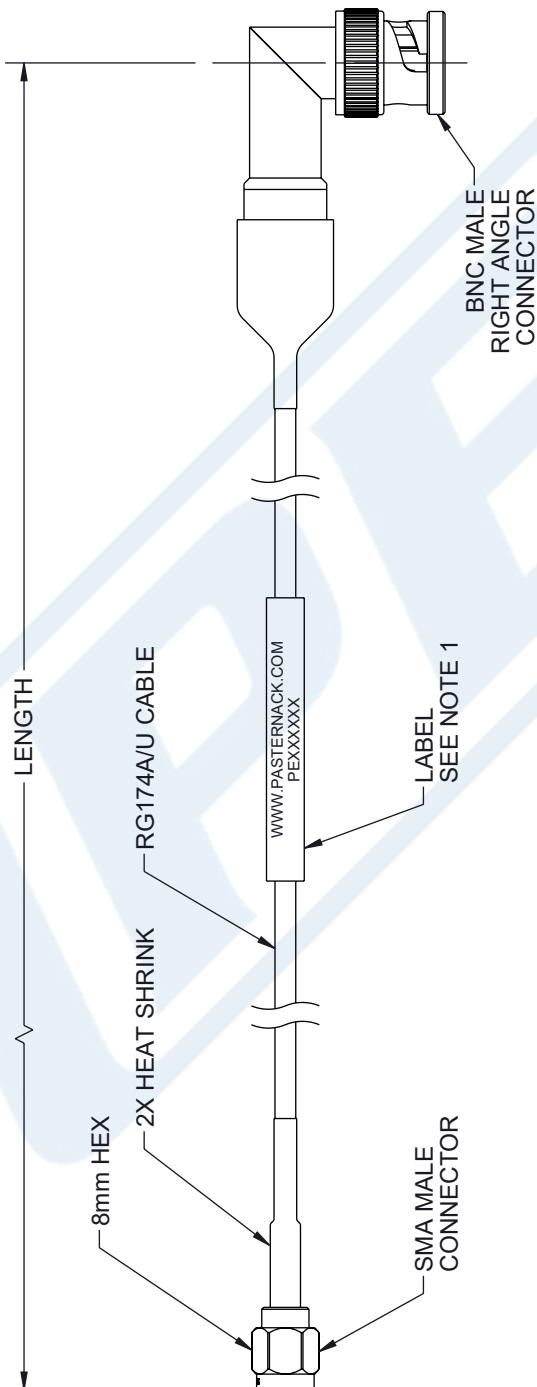

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
- 2.

## NOTES:

TABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES

CUTTING

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN WHOLE OR IN PART WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.