

SMA Male Right Angle to BNC Male Cable Using RG141 Coax with HeatShrink




PE3W09643/HS

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: BNC Male
- Cable Type: RG141
- Coax Flex Type: Flexible

Features

- Max Frequency 4 GHz
- 70% Phase Velocity
- PTFE (FG) Jacket

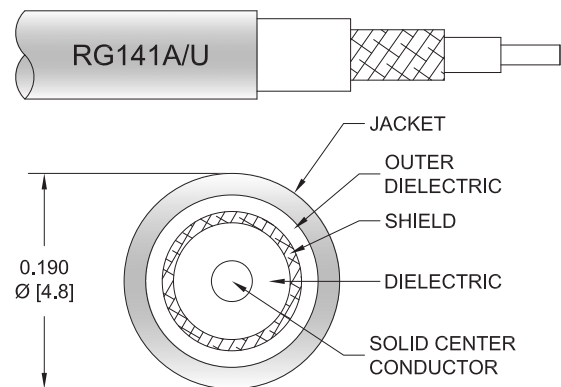

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W09643/HS SMA male right angle to BNC male cable using RG141 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG141 coax. The PE3W09643/HS SMA male to BNC male cable assembly operates to 4 GHz. The right angle SMA interface on the RG141 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Jacket Spark			2,000	Vrms

Specifications by Frequency

SMA Male Right Angle to BNC Male Cable Using RG141 Coax with HeatShrink



PE3W09643/HS

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		100	250	500	1000	
PE3W09643/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.04	0.05	0.08	0.13	0.303	dB/ft	
			0.13	0.18	0.27	0.43	1	dB/m	
PE3W09643/HS-12	12 inch	Insertion Loss (Typ.)	0.34	0.36	0.38	0.43	0.61	dB	0.077
PE3W09643/HS-24	24 inch	Insertion Loss (Typ.)	0.38	0.41	0.46	0.56	0.91	dB	0.11
PE3W09643/HS-36	36 inch	Insertion Loss (Typ.)	0.42	0.47	0.54	0.69	1.21	dB	0.143
PE3W09643/HS-48	48 inch	Insertion Loss (Typ.)	0.46	0.52	0.62	0.82	1.51	dB	0.176
PE3W09643/HS-60	60 inch	Insertion Loss (Typ.)	0.5	0.58	0.7	0.95	1.82	dB	0.209

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.077 pounds
Additional Weight per Inch:	0.00275 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.077 lbs [34.93 g]

Cable

Cable Type	RG141
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper
Jacket Material	PTFE (FG), Beige
Jacket Diameter	0.19 in [4.83 mm]

SMA Male Right Angle to BNC Male Cable Using RG141 Coax with HeatShrink



PE3W09643/HS

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum
Hex Size	5/16 inch	
Torque	3 in-lbs 0.34 Nm	

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Male Right Angle to BNC Male Cable Using RG141 Coax with HeatShrink



PE3W09643/HS

Typical Performance Data

How to Order

Part Number Configuration:

PE3W09643/HS - xx uu



Example: PE3W09643/HS-12 = 12 inches long cable
PE3W09643/HS-100cm = 100 cm long cable

SMA Male Right Angle to BNC Male Cable Using RG141 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable Using RG141 Coax with HeatShrink PE3W09643/HS](https://www.pasternack.com/sma-male-right-angle-to-bnc-male-cable-using-rg141-with-heatshrink-pe3w09643-hs-p.aspx)

URL: <https://www.pasternack.com/sma-male-right-angle-to-bnc-male-cable-using-rg141-with-heatshrink-pe3w09643-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W09643/HS CAD Drawing

SMA Male Right Angle to BNC Male Cable Using RG141 Coax with HeatShrink

