



TNC Male Right Angle to TNC Male Cable Using RG316 Coax In 150 CM Length

RF Cable Assemblies Technical Data Sheet

PE3W10541-150CM

Configuration

- Connector 1: TNC Male Right Angle
- Connector 2: TNC Male
- Cable Type: RG316

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket



Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W10541-150CM TNC male right angle to TNC male 150 cm cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a male to male gender configuration with 50 ohm flexible RG316 coax. The PE3W10541-150CM TNC male to TNC male cable assembly operates to 3 GHz. The right angle TNC interface on the RG316 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to TNC Male Cable Using RG316 Coax In 150 CM Length PE3W10541-150CM](#)



TNC Male Right Angle to TNC Male Cable
Using RG316 Coax In 150 CM Length

RF Cable Assemblies Technical Data Sheet

PE3W10541-150CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
Velocity of Propagation		69		%
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.47	0.73	1.1	1.63	2.98	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1*SQRT(FGHz) dB per connector.

Mechanical Specifications

Cable Assembly

Length* 59.06 in [150.01 cm]

Weight 0.142 lbs [64.41 g]

Cable

Cable Type RG316
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Silver Plated Copper Braid
Jacket Material FEP, Tan
Jacket Diameter 0.102 in [2.59 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to TNC Male Cable Using RG316 Coax In 150 CM Length PE3W10541-150CM](#)



TNC Male Right Angle to TNC Male Cable
Using RG316 Coax In 150 CM Length

RF Cable Assemblies Technical Data Sheet

PE3W10541-150CM

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Right Angle	TNC Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification		15 µin
Dielectric Type	POM	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100 µin
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to TNC Male Cable Using RG316 Coax In 150 CM Length PE3W10541-150CM](#)



TNC Male Right Angle to TNC Male Cable
Using RG316 Coax In 150 CM Length

RF Cable Assemblies Technical Data Sheet

PE3W10541-150CM

How to Order

Part Number Configuration:

PE3W10541

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W10541-12 = 12 inches long cable
PE3W10541-100cm = 100 cm long cable

TNC Male Right Angle to TNC Male Cable Using RG316 Coax In 150 CM Length from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to TNC Male Cable Using RG316 Coax In 150 CM Length PE3W10541-150CM](#)


URL: <https://www.pasternack.com/tAc-male-right-aAgle-to-tAc-male-cable-150-cm-leAghth-usiAg-rg316-pe3w10541-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W10541-150CM CAD Drawing

TNC Male Right Angle to TNC Male Cable Using RG316 Coax In 150 CM Length

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/9/2021	A. GANWANI

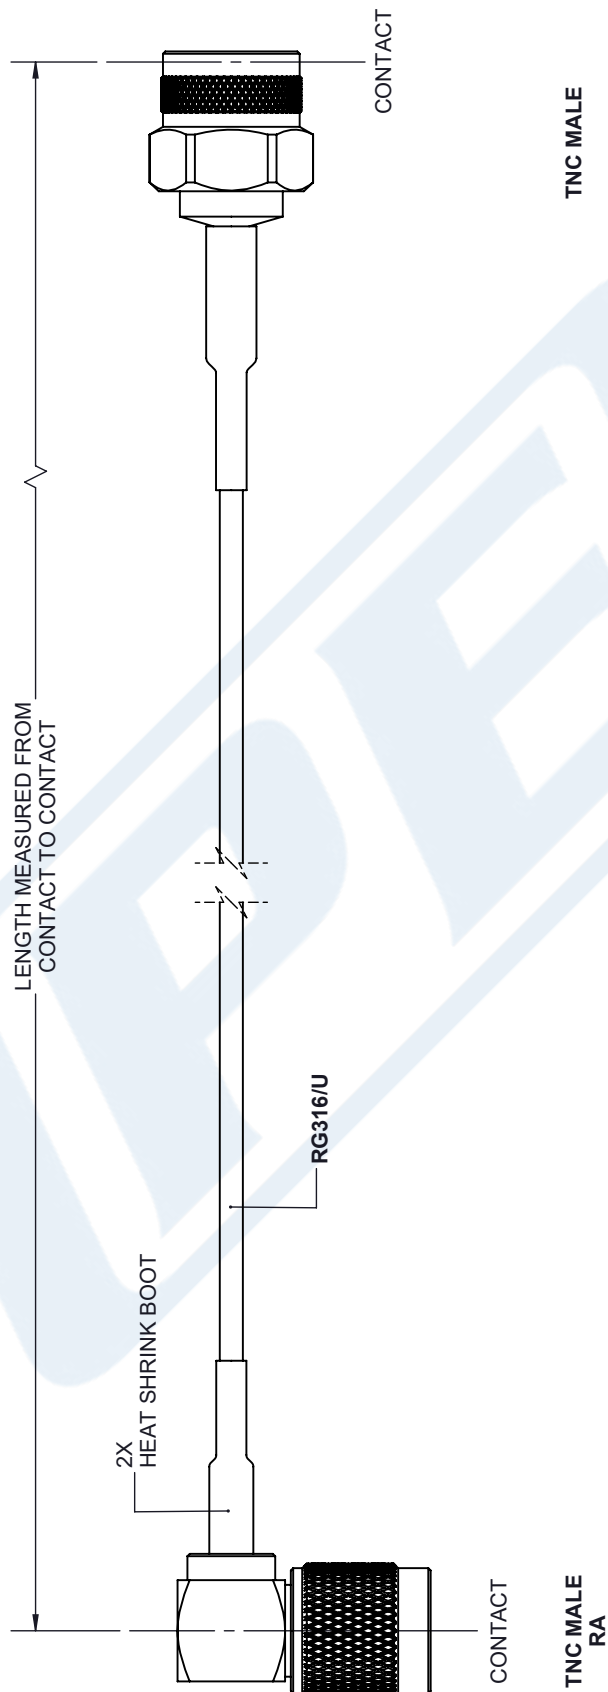

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS				THIRD-ANGLE PROJECTION			
TOLERANCES:				 THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.			
X = ± .2 [.008] FRACTIONS .XX = ± .02 [.51] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°				SHEET 1 OF 1			
CABLE LENGTH (L) TOLERANCES:				SCALE N/A			
L ≤ 12 [305] = ±.1 [25] / -0 12 [305] < L ≤ 60 [1524] = ±.2 [51] / -0 60 [1524] < L ≤ 120 [3048] = ±.4 [102] / -0 120 [3048] < L ≤ 300 [7620] = ±.6 [152] / -0 300 [7620] < L = +5% L / -0							
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.							
PE PASTERNAK® an INFINITI® brand							
Pasternack Enterprises, Inc. P.O.Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com							
SIZE A	CAGE CODE 53919	DRAWN BY K.DANG	ITEM NO. PE3W10541	REV A			

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.