

SMA Male Right Angle to SMA Female Cable
Using PE-SR405FLJ Coax , LF Solder



RF Cable Assemblies Technical Data Sheet


PE3W11713LF

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female
- Cable Type: PE-SR405FLJ

Features

- Max Frequency 12.4 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket

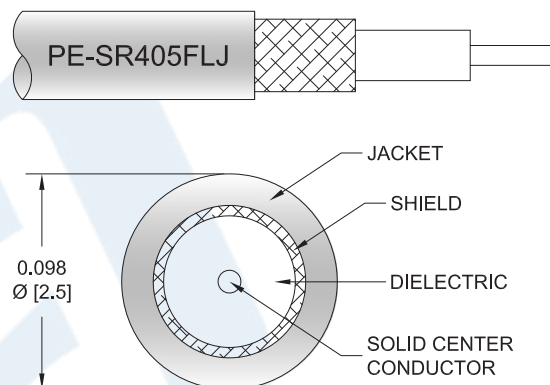

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W11713LF SMA male right angle to SMA female cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to female gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE3W11713LF SMA male to SMA female cable assembly operates to 12.4 GHz. The right angle SMA interface on the PE-SR405FLJ cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Cable Using PE-SR405FLJ Coax , LF Solder PE3W-11713LF](#)



SMA Male Right Angle to SMA Female Cable Using PE-SR405FLJ Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W11713LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω /1000ft [Ω /Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ω /1000ft [Ω /Km]
Operating Voltage (AC)			335	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	12.4	GHz
Insertion Loss (Typ.)	0.15	0.225	0.346	0.549	0.645	dB/ft
	0.49	0.74	1.14	1.8	2.12	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB for the right angle connector and 0.1 dB for the straight connector.

Mechanical Specifications

Cable Assembly

Weight 0.036 lbs [16.33 g]

Cable

Cable Type PE-SR405FLJ
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Outer Conductor Material and Plating Tinned Copper Composite Braid
Jacket Material FEP, Black
Jacket Diameter 0.105 in [2.67 mm]

One Time Minimum Bend Radius 0.5 in [12.7 mm]
Repeated Minimum Bend Radius 0.787 in [19.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Cable Using PE-SR405FLJ Coax , LF Solder PE3W-11713LF](#)



SMA Male Right Angle to SMA Female Cable
Using PE-SR405FLJ Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W11713LF

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Female
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Gold
Contact Plating Specification	50 μ in minimum	MIL-G-45204
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Stainless Steel, Gold
Outer Conductor Plating Specification		MIL-G-45204
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Body Plating Specification	30 μ in minimum	MIL-G-45204
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μ in minimum	
Hex Size	5/16 inch	
Torque	3 in-lbs [0.34 Nm]	

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Cable Using PE-SR405FLJ Coax , LF Solder PE3W-11713LF](#)



SMA Male Right Angle to SMA Female Cable Using PE-SR405FLJ Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W11713LF

How to Order

Part Number Configuration:

PE3W11713LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W11713LF-12 = 12 inches long cable
PE3W11713LF-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Cable Using PE-SR405FLJ Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Cable Using PE-SR405FLJ Coax , LF Solder PE3W11713LF](https://www.pasternack.com/sma-male-right-angle-to-sma-female-cable-using-pe-sr405flj-lf-solder-pe3w11713lf-p.aspx)

URL: <https://www.pasternack.com/sma-male-right-angle-to-sma-female-cable-using-pe-sr405flj-lf-solder-pe3w11713lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W11713LF CAD Drawing
SMA Male Right Angle to SMA Female Cable Using PE-SR405FLJ Coax , LF Solder

