



## N Male to N Male Low Loss Cable Using LMR-195-UF Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W12610**

#### Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: LMR-195-UF

#### Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 74% Phase Velocity
- Double Shielded
- TPE Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W12610 type N male to type N male cable using LMR-195-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-195-UF coax. The PE3W12610 type N male to type N male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-195-UF Coax PE3W12610](#)



## N Male to N Male Low Loss Cable Using LMR-195-UF Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W12610**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
Velocity of Propagation		74		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ω/1000ft [Ω/Km]
Jacket Spark			3,000	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.067	0.097	0.138	0.226	0.356	dB/ft
	0.22	0.32	0.45	0.74	1.17	dB/m

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

#### Mechanical Specifications

##### Cable Assembly

Weight	0.157 lbs [71.21 g]
--------	---------------------

##### Cable

Cable Type	LMR-195-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	Foam PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper
Jacket Material	TPE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-195-UF Coax PE3W12610](#)



## N Male to N Male Low Loss Cable Using LMR-195-UF Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W12610**

Bending Moment  
Flat Plate Crush  
Tensile Strength

0.1 lbs-ft [0.14 N-m]  
10 lbs/in [0.18 Kg/mm]  
40 lbs [18.14 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Brass, Silver
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel

#### Environmental Specifications

Temperature  
Operating Range

-40 to +85 deg C

#### Compliance Certifications

(see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-195-UF Coax PE3W12610](#)



## N Male to N Male Low Loss Cable Using LMR-195-UF Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W12610**

#### How to Order

Part Number Configuration:

**PE3W12610**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W12610-12 = 12 inches long cable  
PE3W12610-100cm = 100 cm long cable

N Male to N Male Low Loss Cable Using LMR-195-UF Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-195-UF Coax PE3W12610](#)


URL: <https://www.pasternack.com/n-male-to-n-male-low-loss-cable-using-lmr-195-uf-pe3w12610-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W12610 CAD Drawing

N Male to N Male Low Loss Cable Using LMR-195-UF Coax

REVISION					
ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	12/23/2022	AKRESOWSKI	SRAUTUS

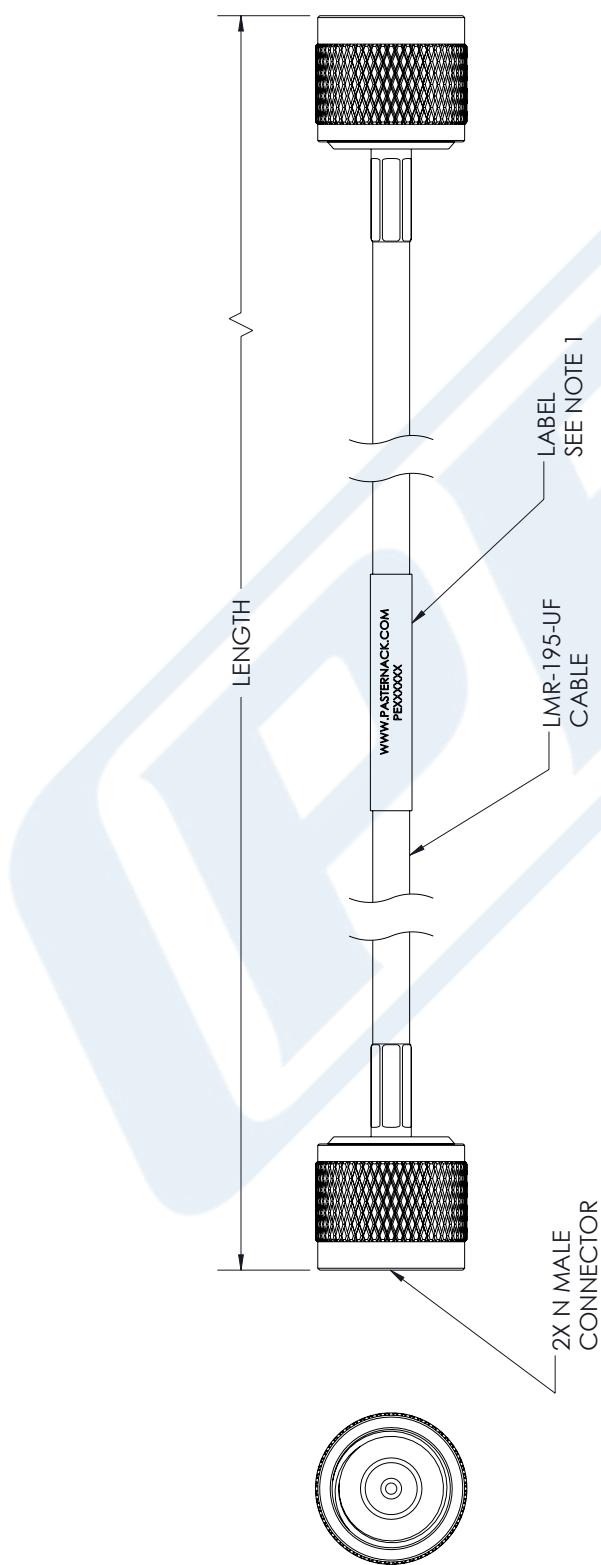

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:  
36 INCHES OR LESS, ONE LABEL APPROXIMATELY  
LONGER THAN 36 INCHES, TWO LABELS APPROX-  
IMATELY 18 INCHES EACH FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CON-

**NOTES:**

NOTES:

36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.  
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES

2 CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY  
FROM EACH CONNECTOR.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE IN INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

---

**TOLERANCES:**

$X = \pm .2$	$[5]$	<b>FRACTIONS</b>
$XX = \pm .02$	$[.5]$	$\pm 1/32$
$XXX = \pm .005$	$[.13]$	$\pm 1/16$

---

**CABLE LENGTH TOLERANCES:**

$217 [305] = +1 [125] / -10$

N MALE TO N MALE LOW LOSS CABLE USING LMR-195-UF COAX				
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	AKREZOWSKI	PE3W12610	A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.