
2.2-5 Female to QMA Male Low PIM Cable Using TFT-5G-402 Coax with HeatShrink

PE3W13525/HS

Configuration

- Connector 1: 2.2-5 Female
- Connector 2: QMA Male
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

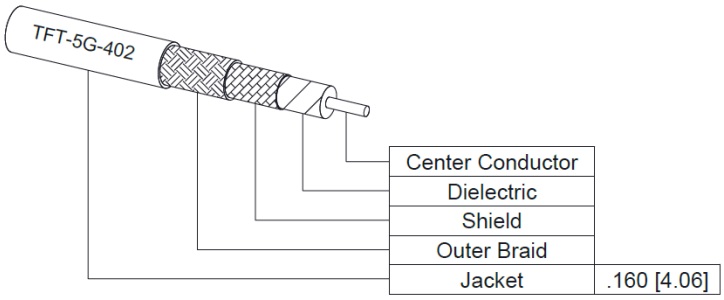

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket
- 100 Mating Cycles

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications

Description

Pasternack's PE3W13525/HS 2.2-5 female to QMA male cable using TFT-5G-402 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 2.2-5 to QMA cable assembly has a female to male gender configuration with 50 ohm flexible TFT-5G-402 coax. The PE3W13525/HS 2.2-5 female to QMA male cable assembly operates to 3 GHz. Our low PIM design also offers excellent passive intermodulation performance. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	80			dB
Capacitance		26.7 [87.6]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz

© 2023 Infinite Electronics, Inc. Pasternack is a registered trademark of Infinite Electronics, Inc.
+1 (866) 558-2786 | sales@pasternack.com | pasternack.com

2.2-5 Female to QMA Male Low PIM Cable Using TFT-5G-402 Coax with HeatShrink

PE3W13525/HS

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Insertion Loss (Max.)	1.017555	1.043887	1.081931	1.111241	1.205688	dB/ft
	3.34	3.42	3.55	3.65	3.96	dB/m

Mechanical Specifications

Cable Assembly

Width/Diameter	0 in [0 mm]
Weight	0.06 lbs [27.22 g]

Cable

Cable Type	TFT-5G-402
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Tin
Outer Conductor 1 Material and Plating	Copper, Tin
Jacket Material	FEP, Blue
Jacket Diameter	0.16 in [4.06 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]

Connectors

Description	Connector 1	Connector 2
Type	2.2-5 Female	QMA Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	100	100
Contact Material and Plating	Beryllium Copper, Silver	Brass, Silver
Contact Plating Specification	200 µin	5 µm
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Beryllium Copper, Silver	
Outer Conductor Plating Specification	100 µin	
Body Material and Plating	Brass, Silver	Brass, Silver
Body Plating Specification	100 µin	5 µm
Torque	26 in-lbs 2.94 Nm	

Environmental Specifications

Operating Range Temperature	-40 to +85 deg C

© 2023 Infinite Electronics, Inc. Pasternack is a registered trademark of Infinite Electronics, Inc.
+1 (866) 558-2786 | sales@pasternack.com | pasternack.com

2.2-5 Female to QMA Male Low PIM Cable Using TFT-5G-402 Coax with HeatShrink

PE3W13525/HS

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

How to Order

Part Number Configuration: **PE3W13525/HS - xx uu**

- uu — Unit of Measure:
  - cm = Centimeters
  - <blank> = Inches
- xx — Length
- PE3W13525/HS — Base Number

Example: PE3W13525/HS-12 = 12 inches long cable
PE3W13525/HS-100cm = 100 cm long cable

2.2-5 Female to QMA Male Low PIM Cable Using TFT-5G-402 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.2-5 Female to QMA Male Low PIM Cable Using TFT-5G-402 Coax with HeatShrink PE3W13525/HS

URL: https://www.pasternack.com/2.2-5-female-to-qma-male-low-pim-cable-using-tft-5g-402-with-heatshrink-pe3w13525-hs-p.aspx

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

© 2023 Infinite Electronics, Inc. Pasternack is a registered trademark of Infinite Electronics, Inc.