

## TNC Male Right Angle to N Female Bulkhead Cable Using RG58 Coax

### PE3W13620




#### Configuration

- Connector 1: TNC Male Right Angle
- Connector 2: N Female Bulkhead
- Cable Type: RG58
- Coax Flex Type: Flexible

#### Features

- Max Frequency 5 GHz
- 65.9% Phase Velocity
- PVC (NC) Jacket

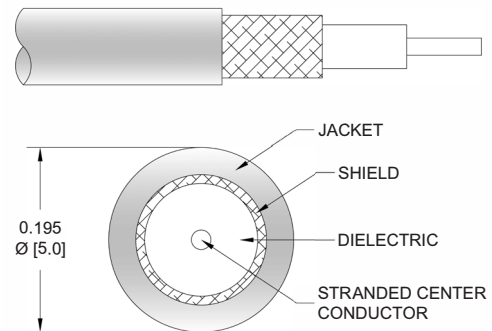

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W13620 TNC male right angle to type N female bulkhead cable using RG58 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to type N cable assembly has a male to female gender configuration with 50 ohm flexible RG58 coax. The PE3W13620 TNC male to type N female cable assembly operates to 5 GHz. The right angle TNC interface on the RG58 cable allows for easier connections in tight spaces. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5	GHz
VSWR			1.4:1	
Velocity of Propagation		65.9		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

#### Specifications by Frequency

## TNC Male Right Angle to N Female Bulkhead Cable Using RG58 Coax



### PE3W13620

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	5000	MHz	
PE3W13620	Custom Lengths Available	Insertion Loss (Typ.)	0.07	0.12	0.2	0.35	0.6	dB/ft	
			0.25	0.39	0.66	1.15	1.97	dB/m	
PE3W13620-12	12 inch	Insertion Loss (Typ.)	0.38	0.42	0.5	0.65	0.9	dB	0.209
PE3W13620-24	24 inch	Insertion Loss (Typ.)	0.45	0.54	0.7	1	1.5	dB	0.233
PE3W13620-36	36 inch	Insertion Loss (Typ.)	0.53	0.65	0.9	1.35	2.1	dB	0.257
PE3W13620-48	48 inch	Insertion Loss (Typ.)	0.6	0.77	1.1	1.7	2.7	dB	0.281
PE3W13620-200CM	200 cm	Insertion Loss (Typ.)	0.79	1.07	1.62	2.6	4.24	dB	0.339

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.209 pounds
Additional Weight per Inch:	0.002 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.209 lbs [94.8 g]

#### Cable

Cable Type	RG58
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Tin
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.98 in [24.89 mm]
Repeated Minimum Bend Radius	1.96 in [49.78 mm]

## TNC Male Right Angle to N Female Bulkhead Cable Using RG58 Coax



### PE3W13620

#### Connectors

Description	Connector 1	Connector 2
Type	TNC Male Right Angle	N Female Bulkhead
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Nickel
Outer Conductor Plating Specification		100 µin minimum
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	

#### Environmental Specifications

Operating Range Temperature -40 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## TNC Male Right Angle to N Female Bulkhead Cable Using RG58 Coax



### PE3W13620

#### Typical Performance Data

#### How to Order

Part Number Configuration: **PE3W13620**    **- xx**    **uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: PE3W13620-12 = 12 inches long cable  
PE3W13620-100cm = 100 cm long cable


TNC Male Right Angle to N Female Bulkhead Cable Using RG58 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Female Bulkhead Cable Using RG58 Coax PE3W13620](https://www.pasternack.com/tnc-male-right-angle-to-n-female-bulkhead-cable-using-rg58-pe3w13620-p.aspx)

URL: <https://www.pasternack.com/tnc-male-right-angle-to-n-female-bulkhead-cable-using-rg58-pe3w13620-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W13620 CAD Drawing
TNC Male Right Angle to N Female Bulkhead Cable Using RG58 Coax

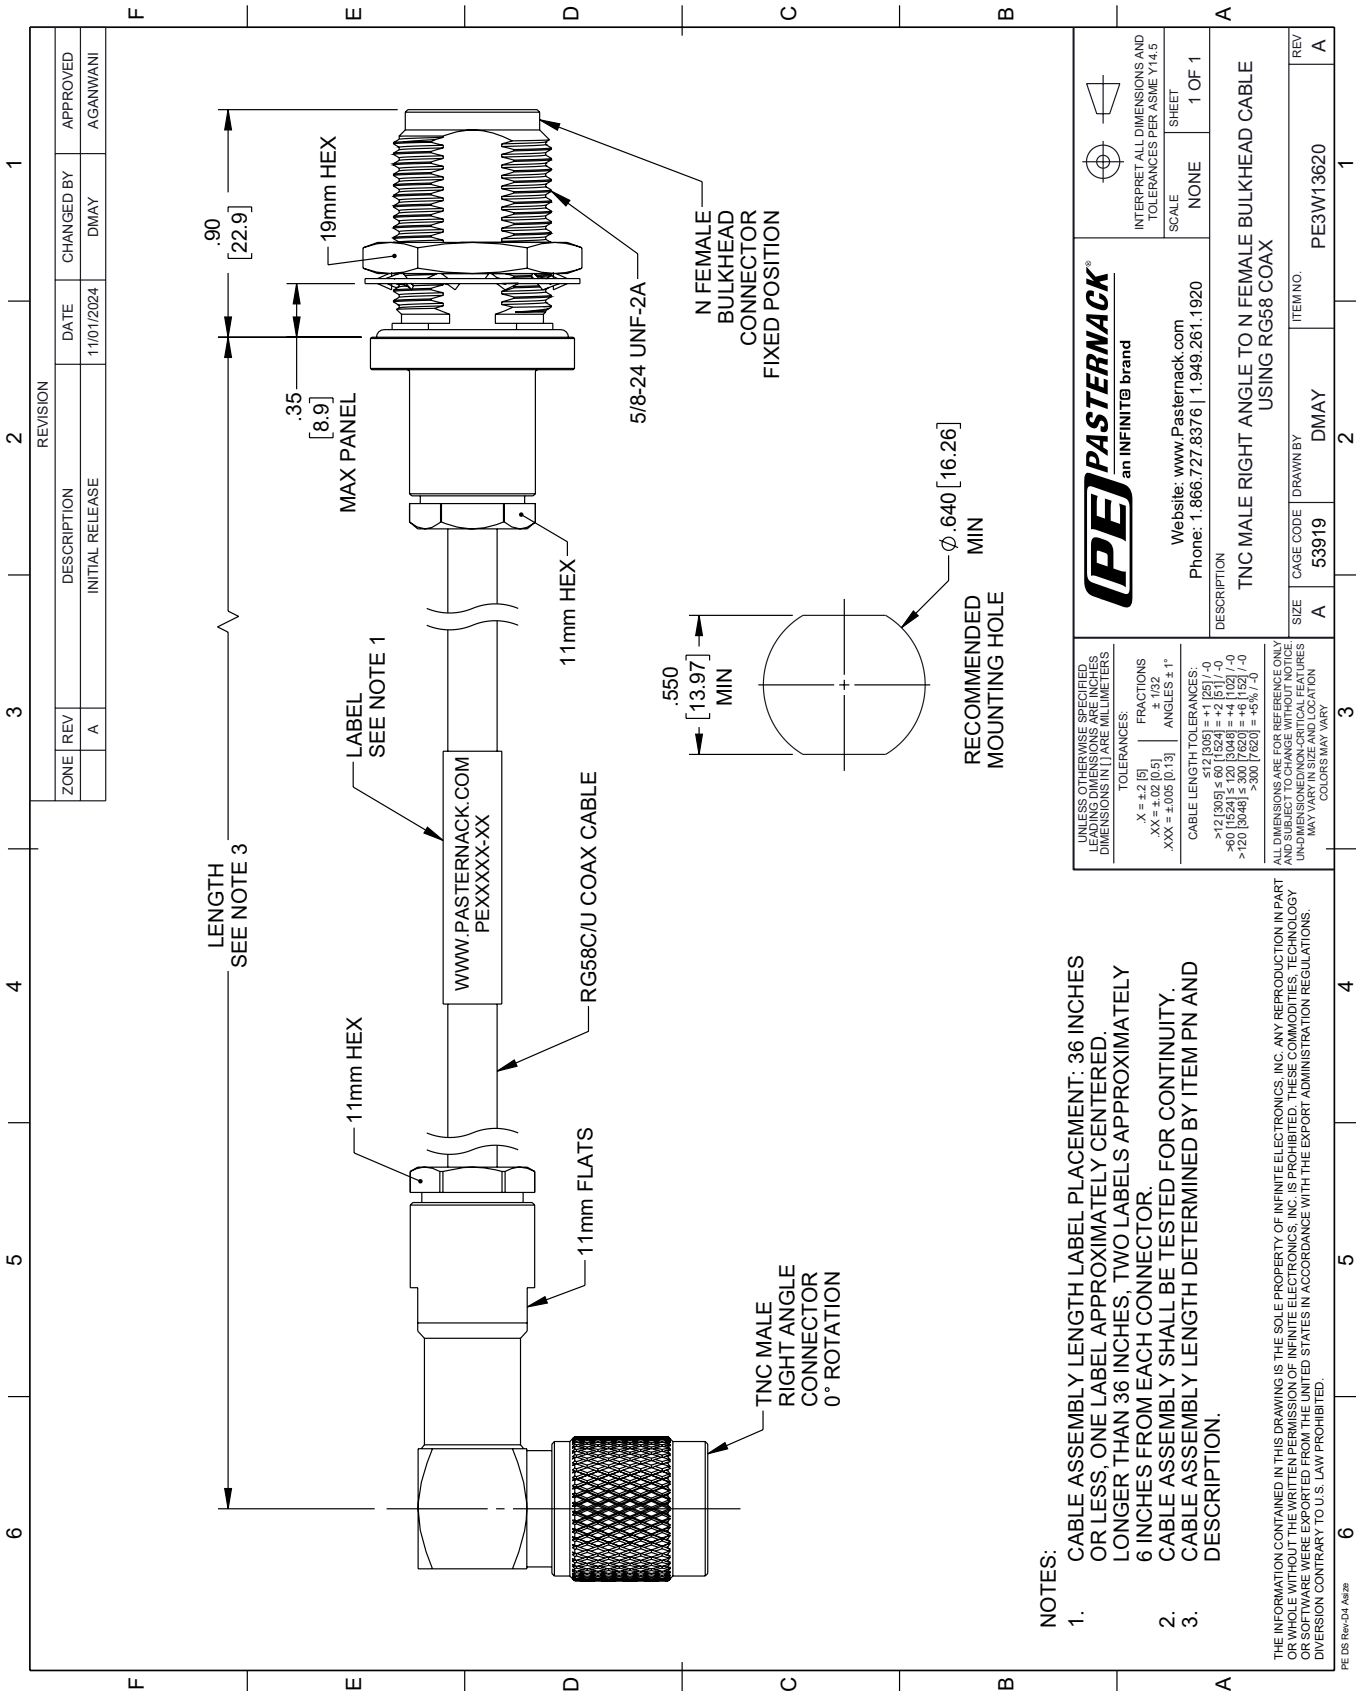

- 1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
- 2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- 3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE IN MILLIMETERS.		<b>PE PASTERNAK</b> an INFINITE® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a>		SCALE	
X = ±.2 [5]		Phone: 1.866.727.8376   1.949.261.1920		NONE	
.XX = ±.02 [0.5]				SHEET	
.XXX = ±.005 [0.13]				1 OF 1	
ANGLES ± 1°					
CABLE LENGTH TOLERANCES:		DESCRIPTION			
>12 [305] ≤ 60 [1524] = ±.1 [25] / -0		TNC MALE RIGHT ANGLE TO N FEMALE BULKHEAD CABLE			
>60 [1524] ≤ 120 [3048] = ±.1 [25] / -0		USING RG58 COAX			
>120 [3048] ≤ 300 [7620] = ±.1 [25] / -0					
>300 [7620] = ±.1 [25] / -0					
ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE IN MILLIMETERS. DIMENSIONS MAY VARY.		ITEM NO.			
		SIZE			
		A			
		CAGE CODE			
		53919			
		DRAWN BY			
		DMAY			
		ITEM NO.			
		PE3W13620			
		REV			
		A			