



10-32 Male Right Angle to BNC Female
Bulkhead Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet


PE3W14286

Configuration

- Connector 1: 10-32 Male Right Angle
- Connector 2: BNC Female Bulkhead
- Cable Type: RG174

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

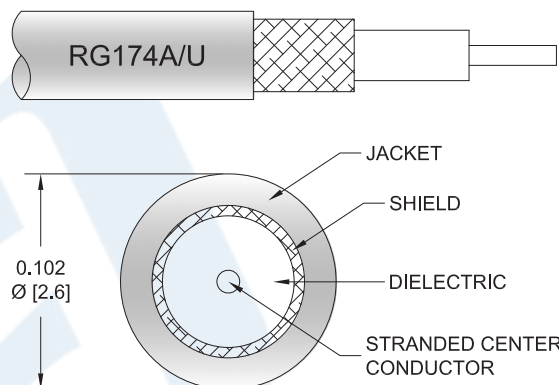

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W14286 10-32 male right angle to BNC female bulkhead cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 10-32 to BNC cable assembly has a male to female gender configuration with 50 ohm flexible RG174 coax. The PE3W14286 10-32 male to BNC female cable assembly operates to 1 GHz. The right angle 10-32 interface on the RG174 cable allows for easier connections in tight spaces. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG174 Coax PE3W14286](#)



10-32 Male Right Angle to BNC Female
Bulkhead Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3W14286

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Velocity of Propagation		66		%
Capacitance		31.08 [101.97]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.066	0.084	0.137	0.211	0.32	dB/ft
	0.22	0.28	0.45	0.69	1.05	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the BNC female connector and 0.2 dB for the 10-32 male connector.

Mechanical Specifications

Cable Assembly

Weight 0.062 lbs [28.12 g]

Cable

Cable Type RG174
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel
 Dielectric Type PE
 Number of Shields 1
 Shield Layer 1 Tinned Copper Braid
 Jacket Material PVC, Black
 Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG174 Coax PE3W14286](#)



10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3W14286

Connectors

Description	Connector 1	Connector 2
Type	10-32 Male Right Angle	BNC Female Bulkhead
Specification	MIL-C-39012	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold over Nickel	Brass, Gold
Contact Plating Specification	MIL-G-45204	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	QQ-N-290	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	QQ-N-290	

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG174 Coax PE3W14286](#)



10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3W14286

How to Order

Part Number Configuration:

PE3W14286

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W14286-12 = 12 inches long cable
PE3W14286-100cm = 100 cm long cable

10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG174 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG174 Coax PE3W14286](https://www.pasternack.com/10-32-male-right-angle-to-bnc-female-bulkhead-cable-using-rg174-pe3w14286-p.aspx)

URL: <https://www.pasternack.com/10-32-male-right-angle-to-bnc-female-bulkhead-cable-using-rg174-pe3w14286-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

