

Fire Rated SMA Male to SMA Female Bulkhead Low Loss Cable Using LMR-100-FR Coax, LF Solder




PE3W17372LF

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Female Bulkhead
- Cable Type: LMR-100A-FR
- Coax Cable Group: 8
- Coax Flex Type: Flexible

Features

- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- FRPE Jacket
- 500 Mating Cycles

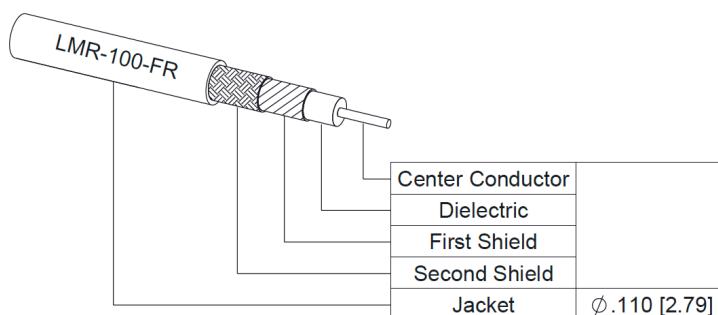

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W17372LF SMA male to SMA female bulkhead cable using LMR-100-FR coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to female gender configuration with 50 ohm flexible LMR-100A-FR coax. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ohms/1000ft [Ohms/Km]

Fire Rated SMA Male to SMA Female Bulkhead Low Loss Cable Using LMR-100-FR Coax, LF Solder



PE3W17372LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			2,000	Vrms

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.029 lbs [13.15 g]

Cable

Cable Type	LMR-100A-FR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper
Jacket Material	FRPE, Black
Jacket Diameter	0.11 in [2.79 mm]
One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

Fire Rated SMA Male to SMA Female Bulkhead Low Loss Cable Using LMR-100-FR Coax, LF Solder



PE3W17372LF

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Female Bulkhead
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	30 μ in minimum	MIL-G-45204
Dielectric Type	PTFE	
Outer Conductor Material and Plating		Brass, Nickel
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μ in minimum	
Hex Size	5/16 inch	
Torque	3 in-lbs 0.34 Nm	

Environmental Specifications

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Fire Rated SMA Male to SMA Female Bulkhead Low Loss Cable Using LMR-100-FR Coax, LF Solder




PE3W17372LF

Typical Performance Data

How to Order

Part Number Configuration:

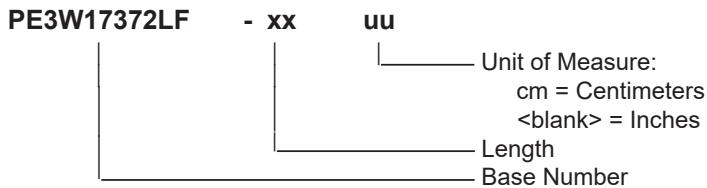

Example: PE3W17372LF-12 = 12 inches long cable
PE3W17372LF-100cm = 100 cm long cable

Fire Rated SMA Male to SMA Female Bulkhead Low Loss Cable Using LMR-100-FR Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Fire Rated SMA Male to SMA Female Bulkhead Low Loss Cable Using LMR-100-FR Coax, LF Solder PE3W17372LF](#)

URL: <https://www.pasternack.com/fire-rated-sma-male-to-sma-female-bulkhead-low-loss-cable-using-lmr-100-fr-lf-solder-pe3w17372lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W17372LF CAD Drawing

Fire Rated SMA Male to SMA Female Bulkhead Low Loss Cable Using LMR-100-FR Coax, LF Solder

