



WR-6 Waveguide Conical Gain Horn Antenna Operating from 100 GHz to 112 GHz with a Nominal 25 dBi Gain with UG-387/U-Mod Round Cover Flange

Gain Horns Technical Data Sheet

PEWAN1064

Features

- Circular Waveguide Interface
- 100 GHz to 112 GHz
- 25 dBi Nominal Gain
- UG-387/U-Mod Round Cover Flange

Applications

- Antenna Measurements
- Wireless Communication
- Laboratory Use
- Microwave Radio Systems

Description

Waveguide conical gain horn antennas are used in a wide variety of applications due to their high power handling capability, low loss, high directivity, and near constant electrical performance across a broad bandwidth. Pasternack's PEWAN1064 WR-6 waveguide conical gain horn antenna operating from 100 GHz to 112 GHz with a nominal 25 dBi gain is part of our full line of RF components available for same-day shipping. This Pasternack circular horn antenna has a gold plated brass body and a precision tolerance UG-387/U-Mod round cover flange. The PEWAN1064 WR-6 waveguide conical gain horn antenna offers low gain variation across its operating frequency range.

Configuration

Design: WR-6 Conical Gain Horn
 Pattern: Directional
 Polarization: Linear

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	100		112	GHz
Nominal Gain		25		dBi
Horizontal Half Power Beam Width		10		Degrees
Vertical Half Power Beam Width		9		Degrees
VSWR		1.15:1		

Mechanical Specifications

Size
 Length: 3.66 in [92.96 mm]
 Width: 0.843 in [21.41 mm]
 Height: 0.843 in [21.41 mm]
 Weight: 0.052 lbs [23.59 g]

Waveguide Interface

Waveguide Size: WR-6
 Flange Type: Round Cover
 Flange Designation: UG-387/U-Mod

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-6 Waveguide Conical Gain Horn Antenna Operating from 100 GHz to 112 GHz with a Nominal 25 dBi Gain with UG-387/U-Mod Round Cover Flange PEWAN1064](#)



WR-6 Waveguide Conical Gain Horn Antenna Operating
from 100 GHz to 112 GHz with a Nominal 25 dBi
Gain with UG-387/U-Mod Round Cover Flange

Gain Horns Technical Data Sheet

PEWAN1064


Body Material and Plating

Aluminum, Gold

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Typical Performance Data

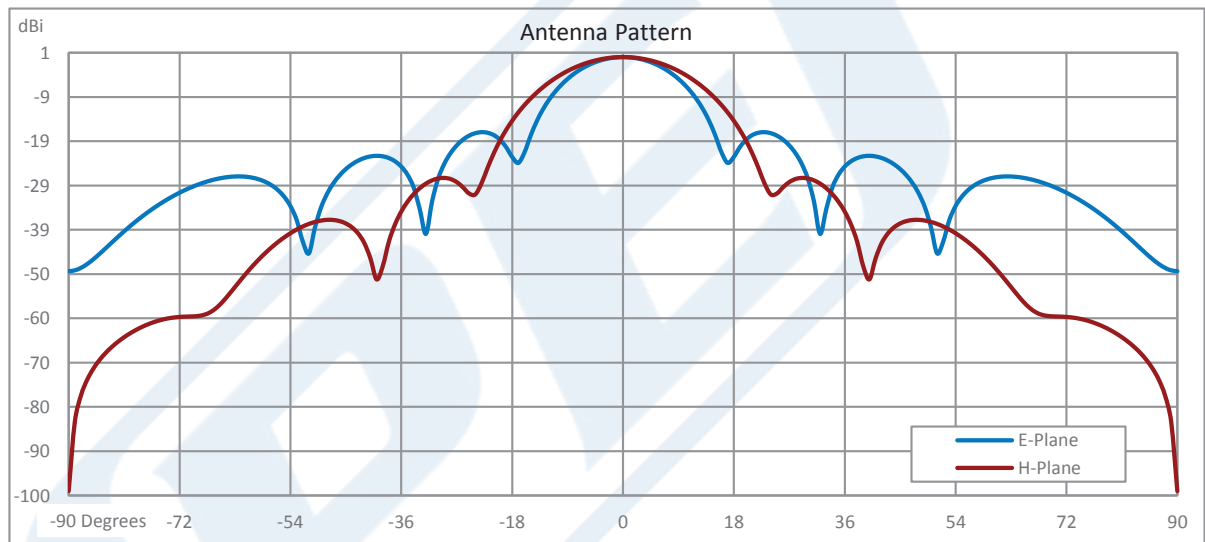


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-6 Waveguide Conical Gain Horn Antenna Operating from 100 GHz to 112 GHz with a Nominal 25 dBi Gain with UG-387/U-Mod Round Cover Flange PEWAN1064](#)



WR-6 Waveguide Conical Gain Horn Antenna Operating
from 100 GHz to 112 GHz with a Nominal 25 dBi
Gain with UG-387/U-Mod Round Cover Flange

Gain Horns Technical Data Sheet

PEWAN1064

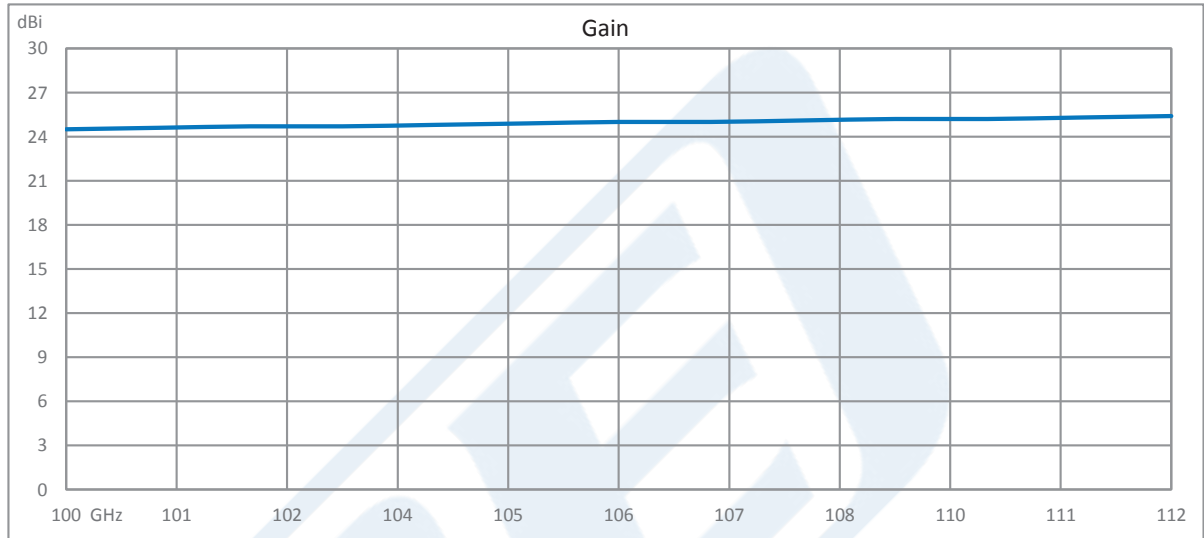

WR-6 Waveguide Conical Gain Horn Antenna Operating from 100 GHz to 112 GHz with a Nominal 25 dBi Gain with UG-387/U-Mod Round Cover Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-6 Waveguide Conical Gain Horn Antenna Operating from 100 GHz to 112 GHz with a Nominal 25 dBi Gain with UG-387/U-Mod Round Cover Flange PEWAN1064](https://www.pasternack.com/wr-6-waveguide-gain-horn-antenna-25dbi-ug-387-mod-round-flange-pewan1064-p.aspx)


URL: <https://www.pasternack.com/wr-6-waveguide-gain-horn-antenna-25dbi-ug-387-mod-round-flange-pewan1064-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWAN1064 CAD Drawing

WR-6 Waveguide Conical Gain Horn Antenna Operating from 100 GHz to 112 GHz
with a Nominal 25 dBi Gain with UG-387/U-Mod Round Cover Flange

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/22/19	M.MILLER

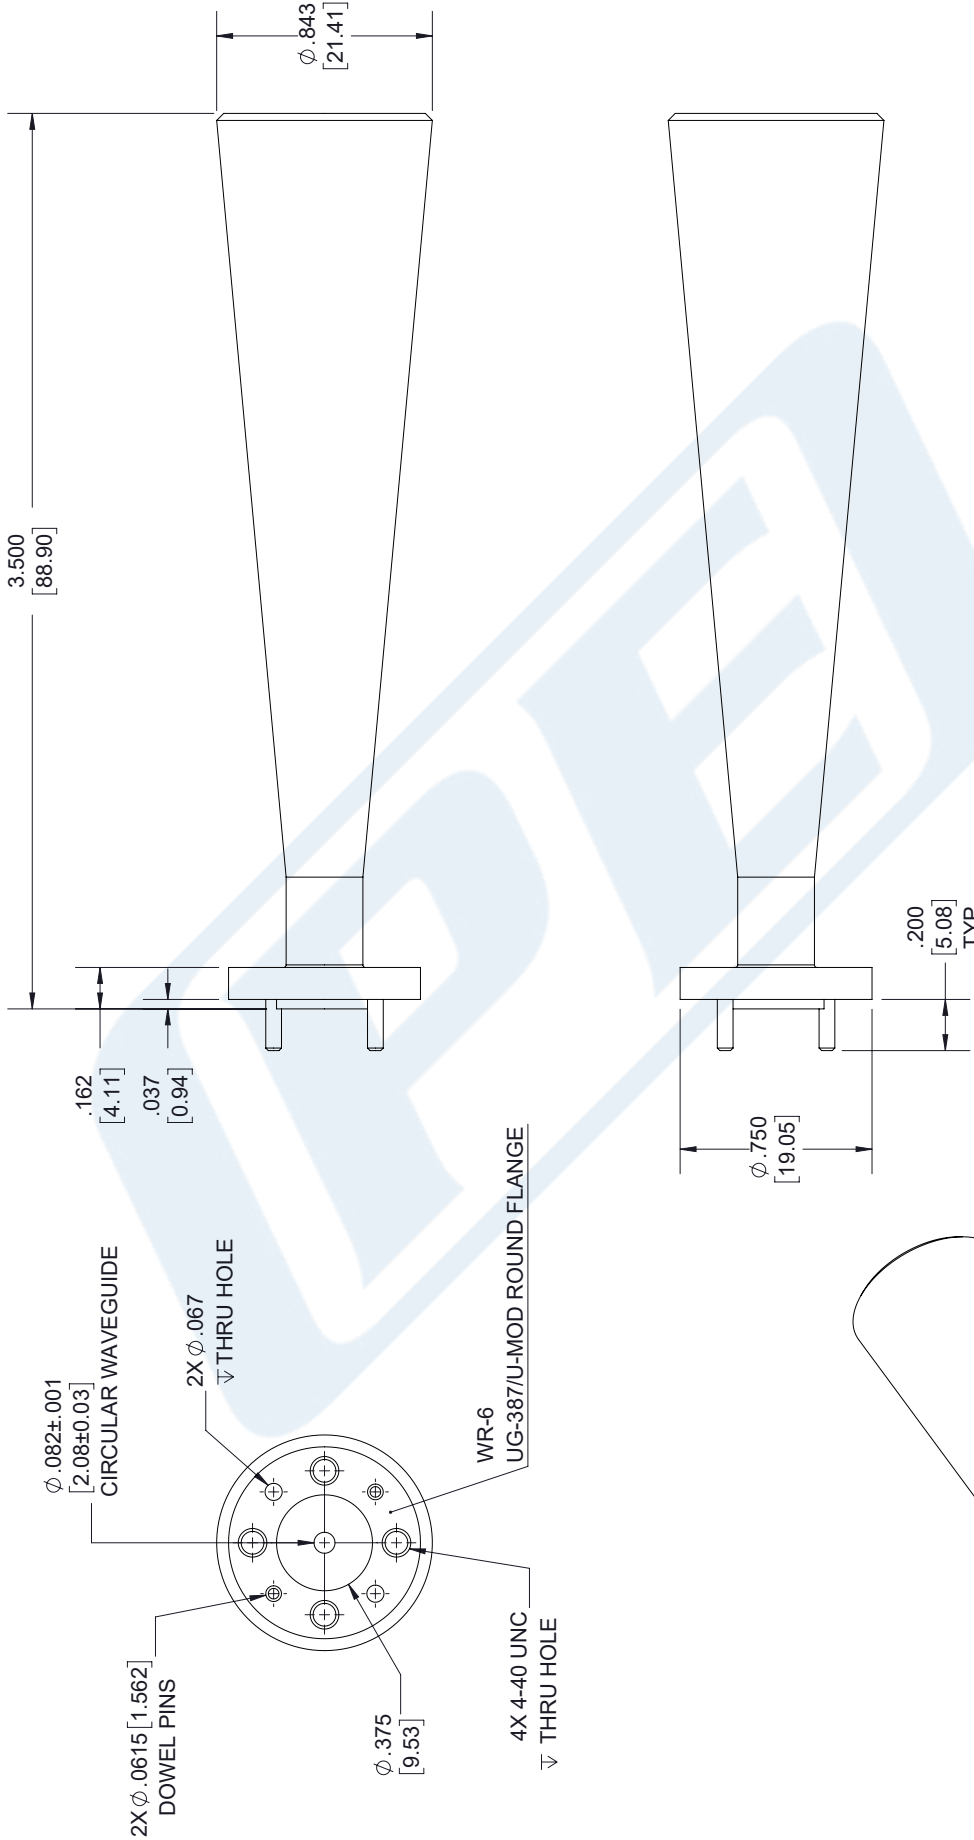

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES: X±.2 [5.08] FRACTIONS ±.132 XX±.01 [0.25] ANGLES ± 1° .XXX±.005 [0.13] ARE FOR REFERENCE ONLY.</p> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p> <p>THIRD-ANGLE PROJECTION</p>		<p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p>	
<p>PE PASTERNAK an INFINITO brand</p> <p>Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 www.pasternack.com e-mail: sales@pasternack.com</p>		<p>REV A</p>	
<p>SIZE A</p>	<p>CAGE CODE 53919</p>	<p>DRAWN BY K.DANG</p>	<p>PART NUMBER PEWAN1064</p>

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.