



WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange

TECHNICAL DATA SHEET

PEWGA3211

Features

- WR-22 Waveguide Voltage Variable Attenuator
- 33 GHz to 50 GHz
- Q Band
- Insertion Loss: 2.7 dB typ
- Attenuation Range: 0 dB to 30 dB typ
- DC Control Voltage: 0 Vdc to +5 Vdc
- Max RF Input Power (CW) +23 dBm
- 50 Ohm Design
- RF Input and Output Waveguide Flange UG-383/U
- Solder Pins for DC Control Voltage and Ground
- Operational Temperature Range -40°C to +80°C
- Rugged and Compact Aluminum Gold Plated Package Design

Applications

- Test & Measurement
- Military and Commercial Communications
- Military Electronic Systems
- Research & Development

Description

The PEWGA3211 is a WR-22 Waveguide Voltage Variable Attenuator, operating across the Q Band from 33 GHz to 50 GHz. This 50 Ohm design has 2.7 dB typ insertion loss with a maximum (CW) input power handling of +23 dBm. The control voltage is 0 Vdc to +5 Vdc to adjust the attenuation level from 0 dB to 30 dB typ across the full frequency band. The rugged and small size aluminum package design is gold plated and supports a UG-383/U waveguide flange pattern at the RF input and output ports. Solder pins are used for DC voltage control and ground. The module operates across a wide temperature range from -40°C to +80°C.

Configuration

Waveguide	WR-22
Flange	UG-383/U
Body Material and Plating	Aluminum, Gold

Electrical Specifications Values at 25°C, sea level

Description	Minimum	Typical	Maximum	Units
Frequency Range	33		50	GHz
Typical Attenuation Value	0		30	dB
Insertion Loss	2.4	2.7	2.9	dB
Maximum Pin (CW)			23	dBm
Control Voltage	0		5	Vdc

Electrical Notes:

- 1.) Open and short-circuit loads are not recommended at the attenuator output.
- 2.) Ensure proper 50 Ohm load before turning the attenuator "ON".
- 3.) Do not put any foreign objects inside the waveguide. Warranty will be voided.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange PEWGA3211](#)



WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange

TECHNICAL DATA SHEET

PEWGA3211

Biasing Up and Power Down Procedure

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Apply DC Supply Voltage
Step 3	Turn ON RF input

Power Down Procedure

Step 1	Turn OFF RF input
Step 2	Turn OFF DC Supply Voltage
Step 3	Remove Ground

Mechanical Specifications

Description	Flange 1	Waveguide	Flange 2
Interface	UG-383/U	WR-22	UG-383/U

Temperature

Operating Range	-40 to +80 deg C
Storage Range	-40 to +100 deg C

Size

Length	1.5 in [38.1 mm]
Width	1.5 in [38.1 mm]
Height	1.2 in [30.48 mm]
Weight	0.15 lbs [68.04 g]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange PEWGA3211](#)



WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange



TECHNICAL DATA SHEET

PEWGA3211

Absolute Maximum Rating

Parameter	Rating
Operating Temperature	-40°C to +80°C
Storage Temperature	-40°C to +100°C
Total Power Dissipation	0.1W
Power Handling (CW)	+23dBm
Control Voltage	+10V

Typical Performance Data

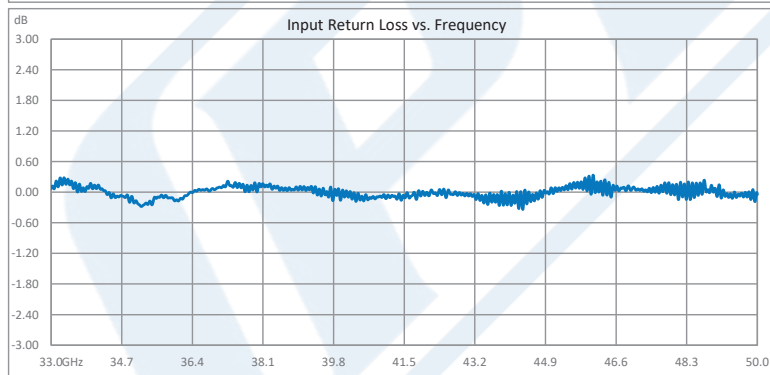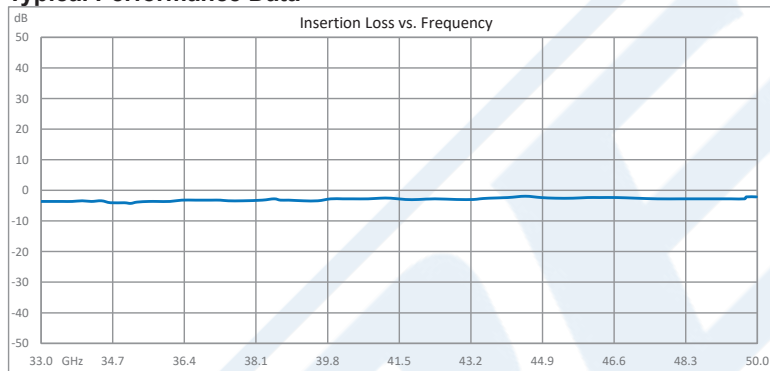


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange PEWGA3211](#)



WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange

TECHNICAL DATA SHEET

PEWGA3211

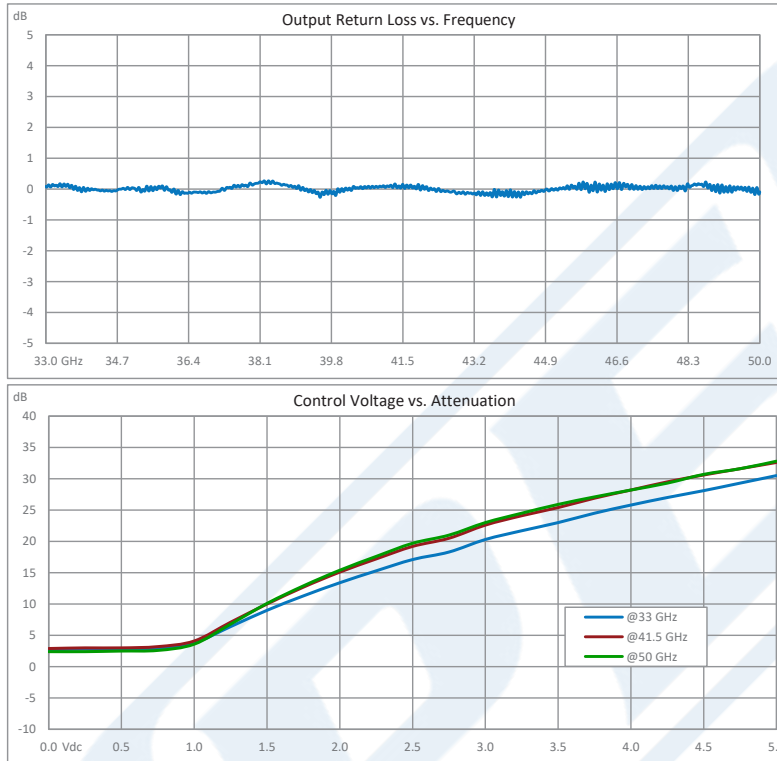

WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange PEWGA3211](https://www.pasternack.com/wr-22-waveguide-voltage-variable-attenuator-q-band-33-ghz-to-50-ghz-0-to-30-db-0-to-5-volt-control-ug-383-u-flange-pewga3211-p.aspx)


URL: <https://www.pasternack.com/wr-22-waveguide-voltage-variable-attenuator-q-band-33-ghz-to-50-ghz-0-to-30-db-0-to-5-volt-control-ug-383-u-flange-pewga3211-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWGA3211 CAD Drawing

WR-22 Waveguide Voltage Variable Attenuator, Q Band, 33 GHz to 50 GHz, 0 to 30 dB Attenuation, 2.7 dB Loss, UG-383/U Flange

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/04/22	TGALLA

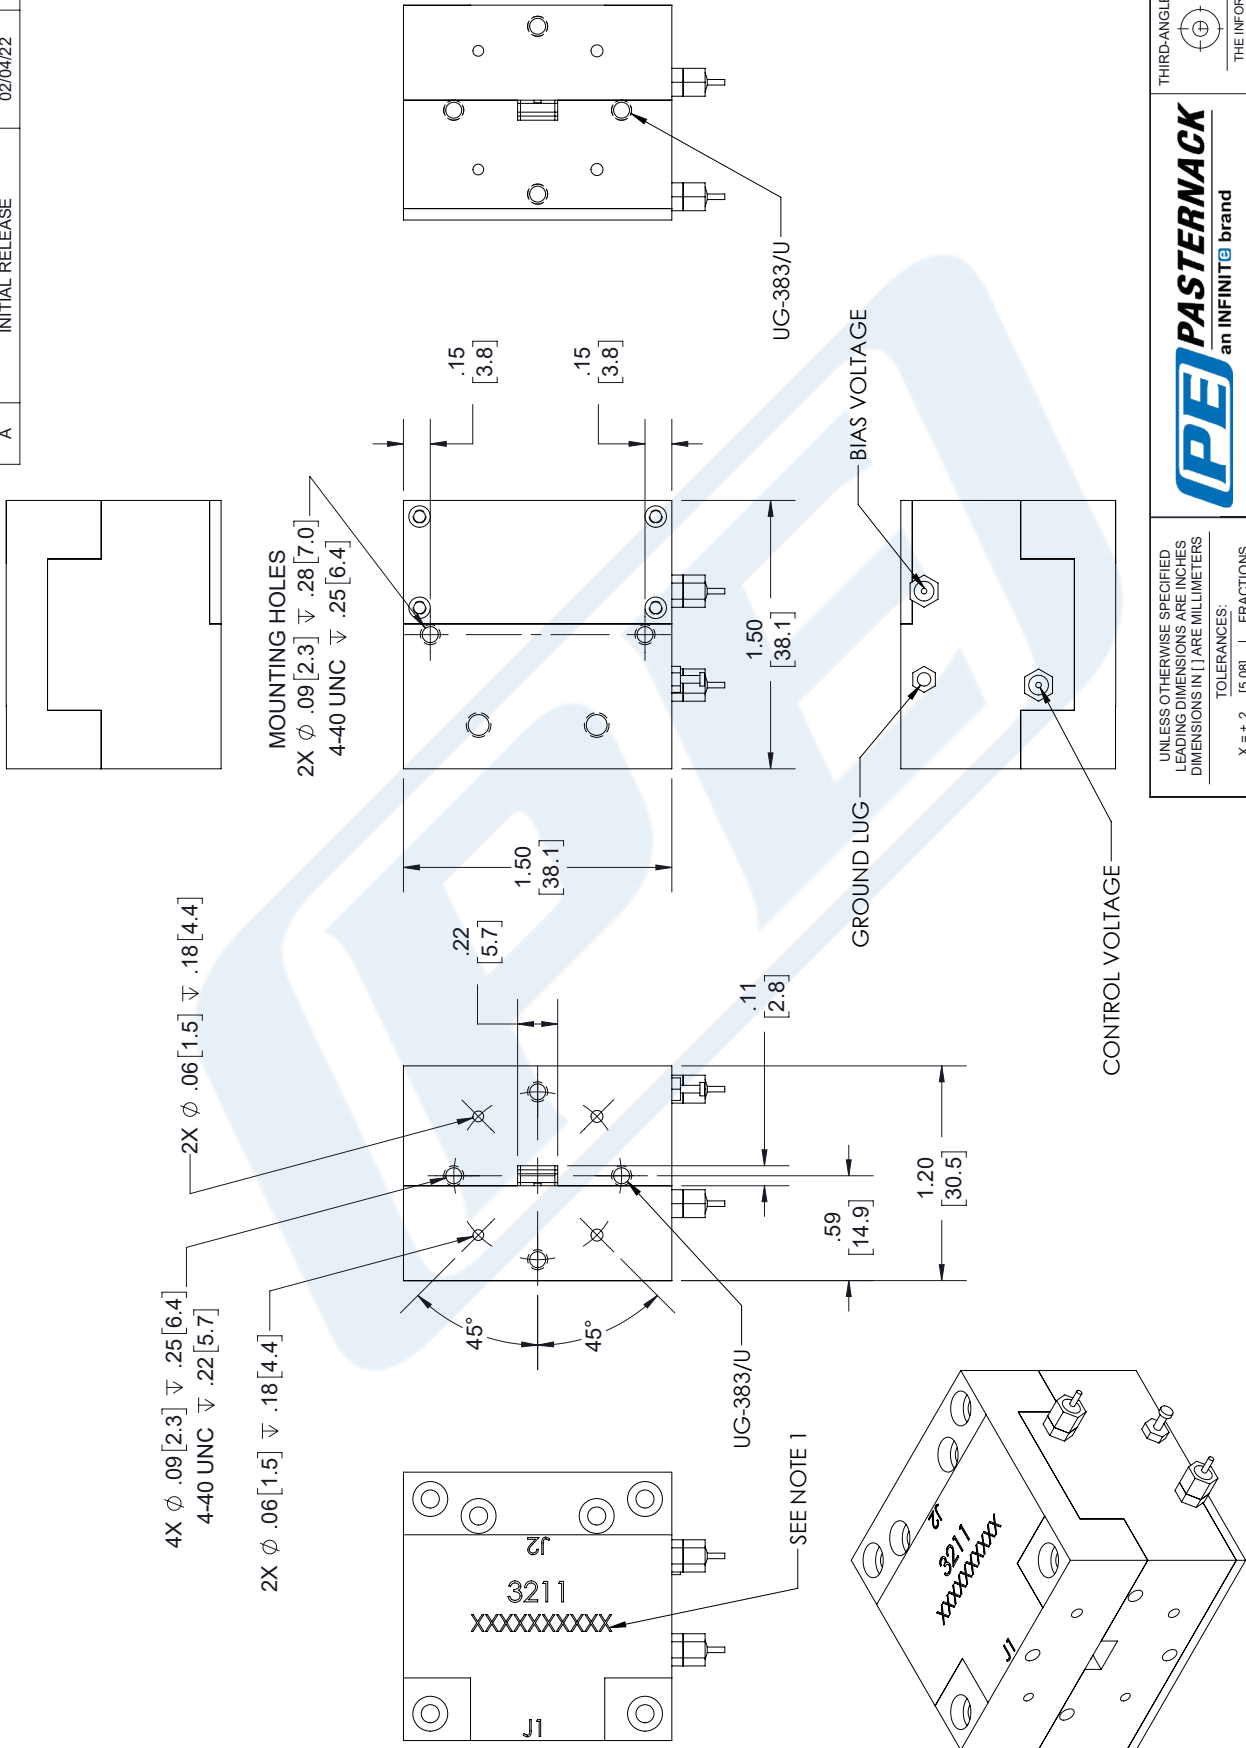

PE PASTERNAK
an INFINITE brand

Pasternack Enterprises, Inc.
P. O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 .X = ±.2 [5.08] FRACTIONS
 .XX = ±.02 [.51] ± 1/32
 .XXX = ±.005 [.13] ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:
 L ≤ 12 [305] = ±1 [25] / -0
 12 [305] < L ≤ 60 [1524] = ±2 [51] / -0
 60 [1524] < L ≤ 120 [3048] = ±4 [102] / -0
 120 [3048] < L ≤ 300 [7620] = ±6 [152] / -0
 300 [7620] < L = +5%L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1
SCALE N/A

SIZE [CAGE CODE] DRAWN BY [ITEM NO.]
A 53919 MVEERAPPAN PEWGA3211
REV A

NOTES:

1. SERIAL NUMBER AND DATE CODE ARE COMBINED. EX: 202008280001.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.