

500 Watts WR-137 Waveguide Load 5.38 GHz to 8.17 GHz, Aluminum with CPR-137F Flange

Waveguide Terminations Technical Data Sheet

PE-W137TR1001

Features

- WR-137 Waveguide
- Operating Frequency Range from 5.38 GHz to 8.17 GHz
- CPR-137F Flange
- 1.25:1 Max VSWR
- 500 Watts Average Power Handling

Applications

- Radar Systems
- Military and Space
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Description

The PE-W137TR1001 is a WR-137 waveguide termination/load that operates in the frequency range of 5.38 GHz to 8.17 GHz. This WR-137 waveguide termination has a Max VSWR of 1.25:1. This waveguide termination design is made of painted aluminum and incorporates a CPR-137F flange. Waveguide terminations are part of Pasternack's comprehensive waveguide product offerings which are available in stock and ready for same-day shipment.

Electrical Specifications


Description	Minimum	Typical	Maximum	Units
Frequency Range	5.38		8.17	GHz
VSWR			1.25:1	
Input Power (CW)			500	Watts

Mechanical Specifications

Size	
Length	13.78 in [350.01 mm]
Width/Dia.	4.13 in [104.9 mm]
Height	4.21 in [106.93 mm]
Weight	3.4 lbs [1.54 kg]

Description	Flange	Waveguide
Designation		WR-137
Type	CPR-137F	
Material	Aluminum	Aluminum
Plating		Chromate
Finish		Grey paint

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [500 Watts WR-137 Waveguide Load 5.38 GHz to 8.17 GHz, Aluminum with CPR-137F Flange PE-W137TR1001](#)

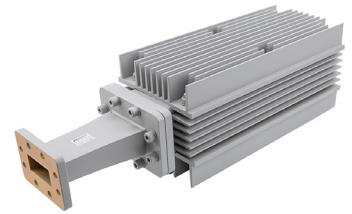

500 Watts WR-137 Waveguide Load 5.38 GHz to
8.17 GHz, Aluminum with CPR-137F Flange

Waveguide Terminations Technical Data Sheet

PE-W137TR1001

Environmental Specifications

Temperature

Operating Range

-40 to +70 deg C

Compliance Certifications (see [product page](#) for current document)

Notes:

500 Watts WR-137 Waveguide Load 5.38 GHz to 8.17 GHz, Aluminum with CPR-137F Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [500 Watts WR-137 Waveguide Load 5.38 GHz to 8.17 GHz, Aluminum with CPR-137F Flange PE-W137TR1001](#)


URL: <https://www.pasternack.com/500-watts-wr-137-rf-load-5.38-8.17-ghz-instrumentation-grade-pe-w137tr1001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE-W137TR1001 CAD Drawing

500 Watts WR-137 Waveguide Load 5.38 GHz to 8.17 GHz, Aluminum with CPR-137F Flange

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/2/2021	S.PONG

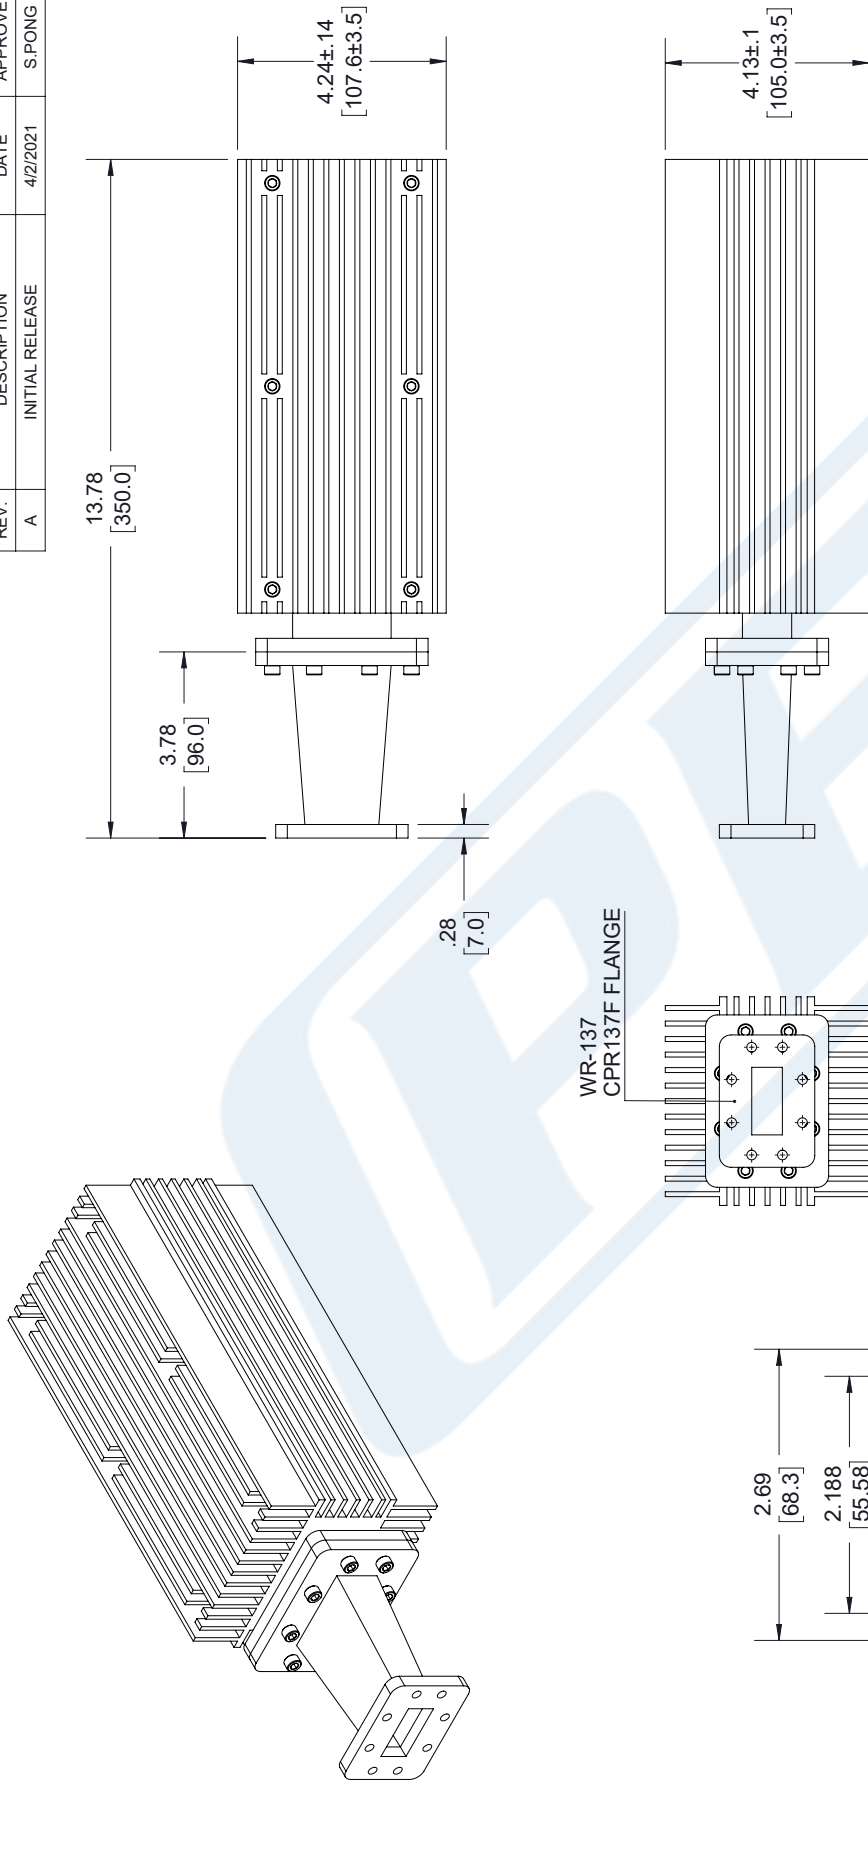

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

PASTERNAK
an INFINITI® brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2	[.508]	FRACTIONS
.XX = ±.02	[.51]	± 1/32
.XXX = ±.005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	= +1 [25] / -0
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0
300 [7620] < L	= +5% / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

NOTES:

1. LABEL PER ILS-100-09. FOR INTERNAL USE ONLY. LABEL LOCATION FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.