



Power and Control Cable for RF Amplifier PE15A5011,
PE15A5014, PE15A5016, PE15A5017, PE15A5018,
PE15A5019, PE15A5020 and PE15A5022

TECHNICAL DATA SHEET

PE15J5011

Mechanical Specifications

Size

Weight

0.191 lbs [86.64 g]

Power and Control Cable for RF Amplifier PE15A5011, PE15A5014, PE15A5016, PE15A5017, PE15A5018, PE15A5019, PE15A5020 and PE15A5022 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Power and Control Cable for RF Amplifier PE15A5011, PE15A5014, PE15A5016, PE15A5017, PE15A5018, PE15A5019, PE15A5020 and PE15A5022 PE15J5011](#)

URL: <https://www.pasternack.com/power-control-cable-rf-amplifier-pe15j5011-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15J5011 CAD Drawing

Power and Control Cable for RF Amplifier PE15A5011, PE15A5014, PE15A5016, PE15A5017, PE15A5018, PE15A5019, PE15A5020 and PE15A5022

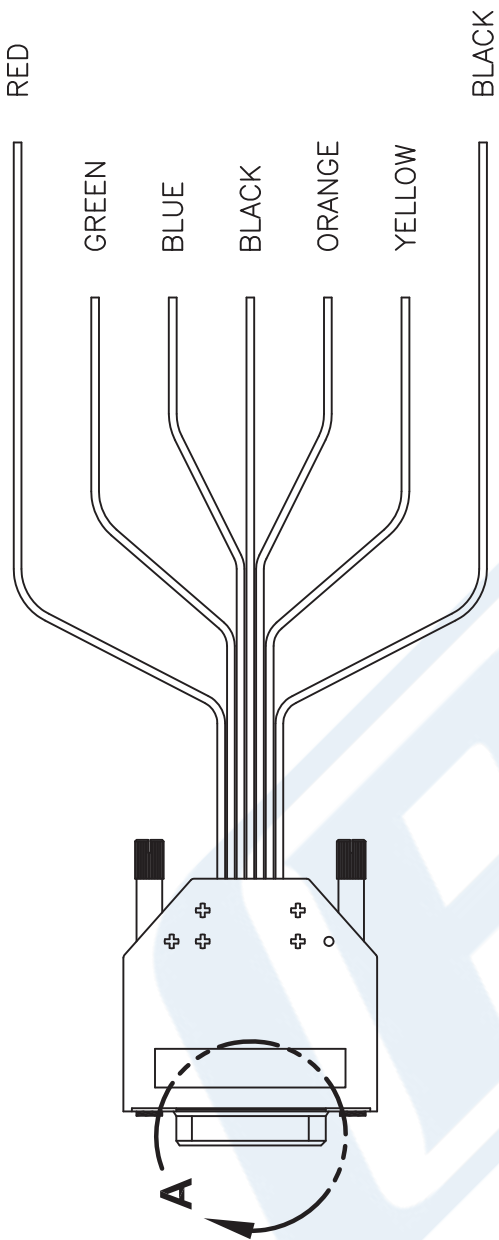

7W2

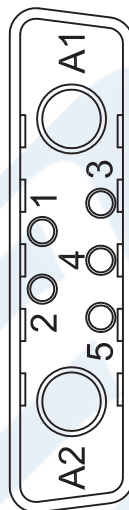

View A

PIN	FUNCTION	COLOR	LABLE
A1	GND	BLACK	GND
A2	+VDC	RED	+VDC
1	TEMP	ORANGE	TEMP
2	ENABLE	BLUE	I/O
3	REV	YELLOW	REV
4	SIG GND	BLACK	GND
5	FWD	GREEN	FWD

DWG TITLE

PE15J5011

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAGE CODE 53919

CAD FILE 033117

SCALE N/A

SIZE A

2233