


12 KHz to 40 GHz, 2.92mm Broadband Bias Tee, Male Input,
Rated to 150 mA and 16 Volts, DC BNC Connector

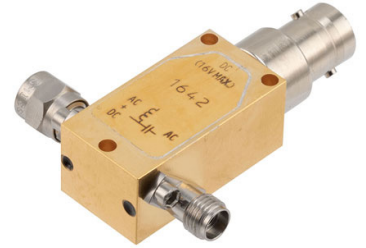

PE1642

Features

- General Purpose Wideband Bias Tee
- 50 KHz to 26 GHz Frequency Range
- Insertion Loss: 1.2 dB Typ
- Isolation: 50 dB typ
- VSWR: 1.5:1 typ
- 50 Ohms Input and Output Matched
- 2.92mm Male RF Input Connector
- 2.92mm Female RF Output Connector
- DC Connector: BNC Female
- Operational Temperature: +15°C to +30°C
- Rating: 150 mA max DC Current and +16V max DC Voltage

Applications

- Biasing for Antenna Amplifiers, Laser Diodes, Photo Diodes, Optical Modulators
- Test & Measurement
- SATCOM
- Wireless Communications Systems
- Power over Ethernet
- Base Stations and Radios

Description

The PE1642 is a Wideband Bias Tee that operates from 12 KHz to 40 GHz. This general purpose Bias Tee is used in applications that require a source of DC voltage and current to be injected into an RF circuit without affecting the RF signal through the main transmission path. The module is designed for a 50 ohm input/output impedance and displays impressive typical performance that includes 1.2 dB insertion loss, 50 dB RF to Bias Port Isolation, and 1.5:1 VSWR. The Bias Tee is rated for 150 mA and +16 Volts max DC voltage. The compact package uses a 2.92mm Male connector at the RF input and a 2.92mm Female connector at the RF output. A Female BNC Connector is used for the DC Port. Operational Temperature is +15°C to +30°C.

Configuration


Design	Broadband
RF Port Connectors	2.92mm Male
DC Port Connector	BNC Female
DC/RF Port Connector	2.92mm Female

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	12KHz		40	GHz
Impedance		50		Ohms
VSWR		1.5:1	2.5:1	
Insertion Loss		1.2	3	dB
RF to Bias Isolation		50		dB
DC Voltage			16	Vdc
DC Current			150	mA
Rise Time		9		ps

Electrical Specification Notes:
Values at +25°C, sea level.

12 KHz to 40 GHz, 2.92mm Broadband Bias Tee, Male Input,
Rated to 150 mA and 16 Volts, DC BNC Connector

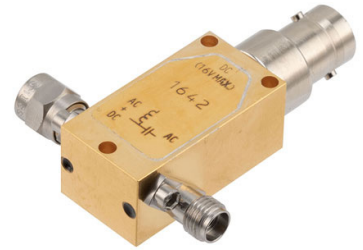

PE1642

Mechanical Specifications

Size

Length	1.2 in [30.48 mm]
Width	0.63 in [16 mm]
Height	0.5 in [12.7 mm]
Weight	0.05 lbs [22.68 g]

Environmental Specifications

Temperature


Operating Range	+15 to +30 deg C
-----------------	------------------

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:



Typical Performance Data

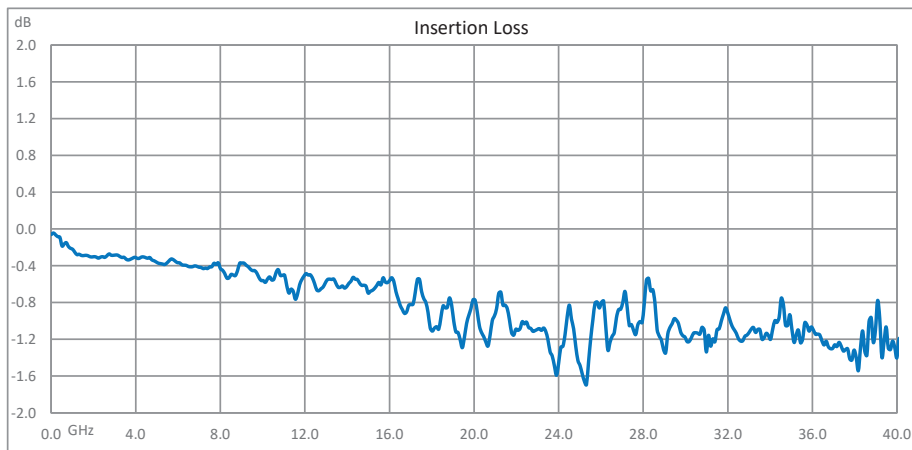

12 KHz to 40 GHz, 2.92mm Broadband Bias Tee, Male Input,
Rated to 150 mA nad 16 Volts, DC BNC Connector

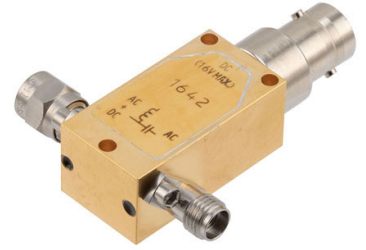

PE1642

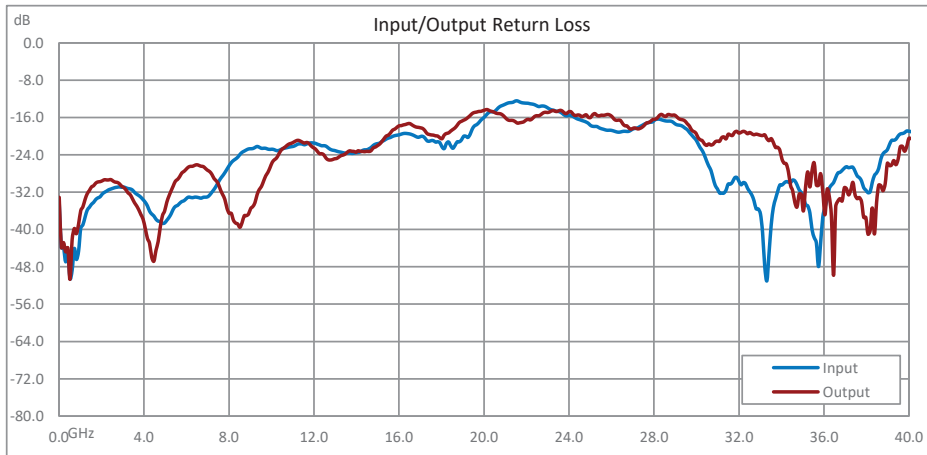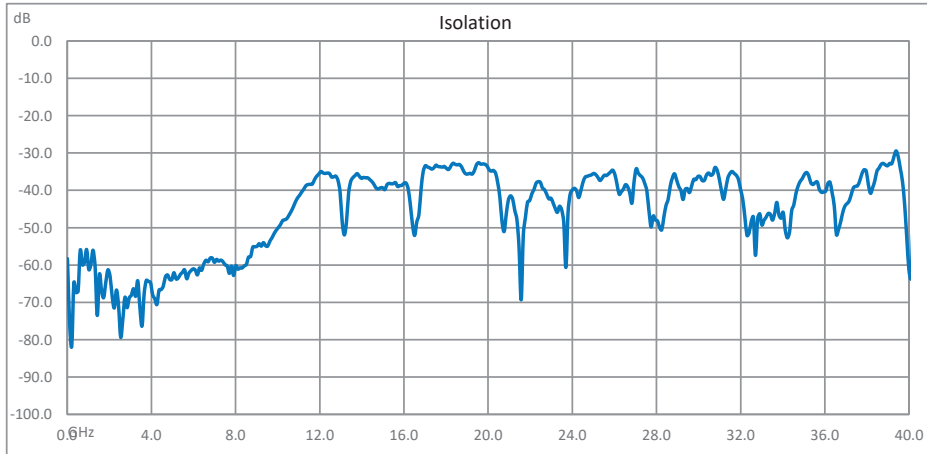

12 KHz to 40 GHz, 2.92mm Broadband Bias Tee, Male Input, Rated to 150 mA nad 16 Volts, DC BNC Connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [12 KHz to 40 GHz, 2.92mm Broadband Bias Tee, Male Input, Rated to 150 mA nad 16 Volts, DC BNC Connector PE1642](https://www.pasternack.com/0.012-mhz-40-ghz-bias-tee-150-ma-16-volts-dc-pe1642-p.aspx)

URL: <https://www.pasternack.com/0.012-mhz-40-ghz-bias-tee-150-ma-16-volts-dc-pe1642-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

12 KHz to 40 GHz, 2.92mm Broadband Bias Tee, Male Input, Rated to 150 mA and 16 Volts, DC BNC Connector

