



Low PIM Directional 30 dB N Coupler From 380 MHz to 4 GHz Rated to 200 Watts

Couplers Technical Data Sheet

PE2CP1073A

Features

- Low PIM (-155 dBc)
- 200 Watt Rating
- 380 – 4,000 MHz
- 30 dB Coupling Factor
- VSWR 1.29 Maximum
- N Female Connector

Applications

- Indoor/Outdoor Use (IP67)
- Base Station
- 4G/AWS/PCS
- Low PIM
- Distributed Antenna Systems (DAS)
- Wireless Infrastructure

Description

The PE2CP1073A is a 30 dB direction coupler with N Female connectors rated to 200 watts. Insertion loss is a low 0.3 dB. The total path loss (including accuracy, frequency variations, dissipative loss and theoretical loss due to coupling) is 0.25 dB.

Pasternack's family of Low PIM couplers are tapered designs that cover the 380 to 4,000 MHz frequency range. Offered in a broad range of coupling values to allow flexibility in the design of your low PIM system: 6, 10, 15, 20, and 30 dB. Especially designed and manufactured for the rigors of low PIM systems, this family of couplers is rated at an average power of 200 watts, and have PIM performance of -155 dBc or better. They can be used indoor or outdoor as they meet the moisture requirements of IP67. If higher power is needed please consider Pasternack's unequal tappers. All couplers are available in four different connector types: N, DIN 7-16, MiniDIN 4.3-10, and MiniDIN 4.1-9.5.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.38		4	GHz
Impedance		50		Ohms
Coupling		30 ±1.5		dB
Frequency Sensitivity		±0.6		dB
Main Line Loss			0.25	dB
Insertion Loss			0.25	dB
Directivity	17			dB
Main Line VSWR			1.22:1	
Secondary Line VSWR			1.29:1	
Passive Intermodulation 2x20W			-155	dBc
Input Power (CW)			200	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Directional 30 dB N Coupler From 380 MHz to 4 GHz Rated to 200 Watts PE2CP1073A](#)



Low PIM Directional 30 dB N Coupler From
380 MHz to 4 GHz Rated to 200 Watts

Couplers Technical Data Sheet

PE2CP1073A

Mechanical Specifications

Size

Length	5.93 in [150.62 mm]
Width/Dia.	1 in [25.4 mm]
Height	2.4 in [60.96 mm]
Weight	1.715 lbs [777.91 g]
Housing Material and Plating	Aluminum, Brass

Configuration

Input Connector	N Female
Output Connector	N Female
Coupled Connectors	N Female

Environmental Specifications

Temperature


Operating Range	-20 to +55 deg C
Ingress Protection (IP) Rating	IP67

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

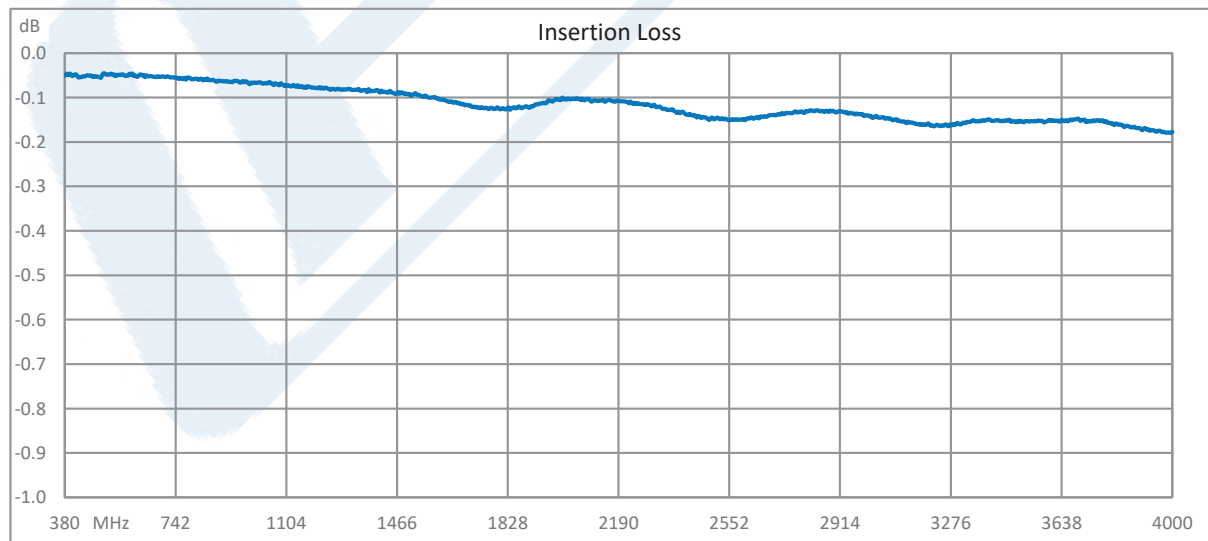


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Directional 30 dB N Coupler From 380 MHz to 4 GHz Rated to 200 Watts PE2CP1073A](#)



Low PIM Directional 30 dB N Coupler From
380 MHz to 4 GHz Rated to 200 Watts

Couplers Technical Data Sheet

PE2CP1073A

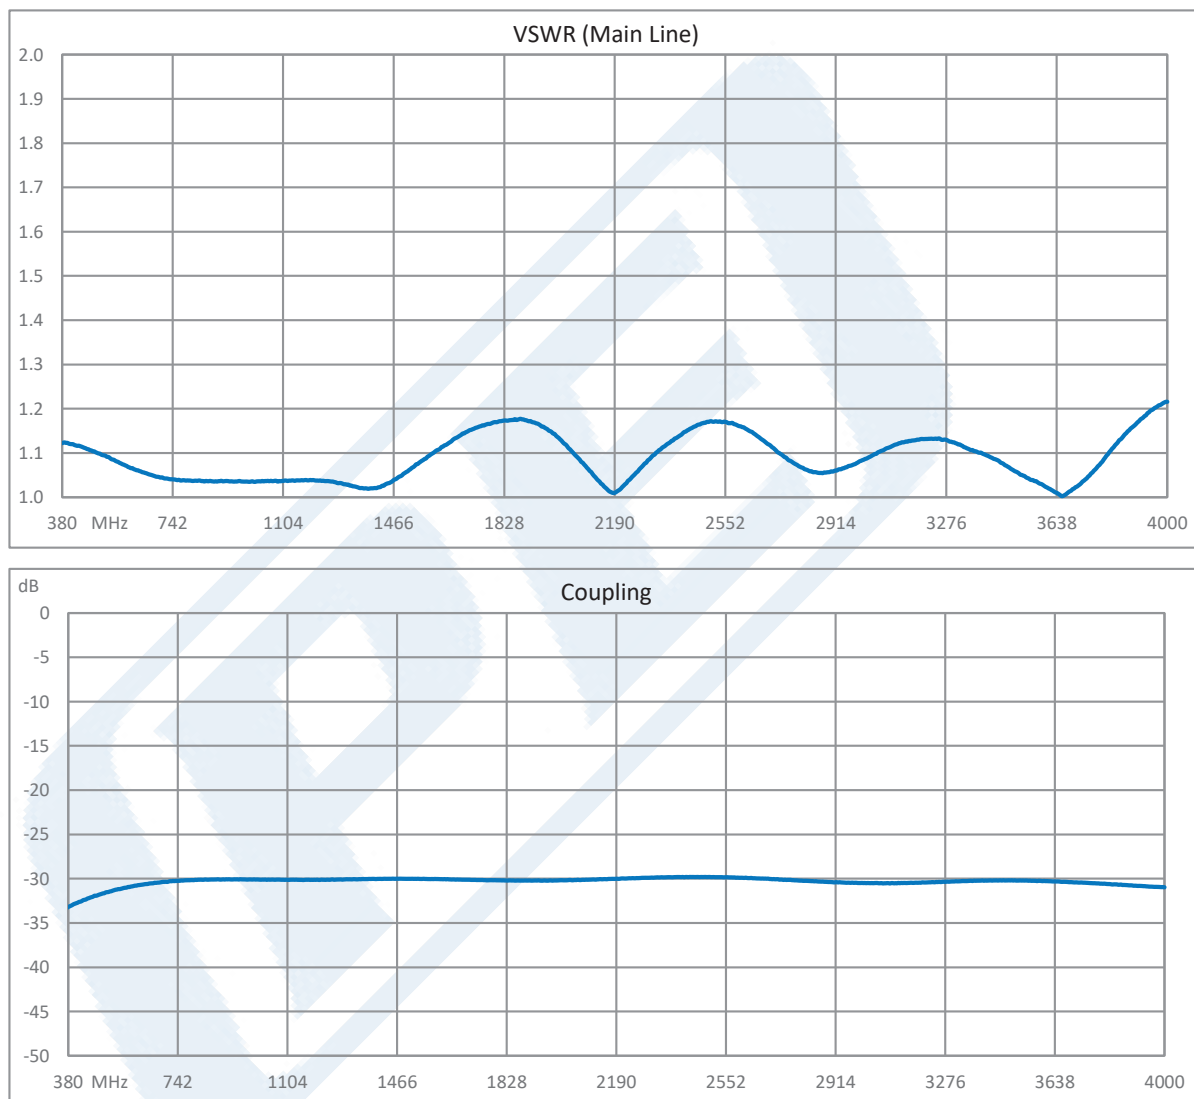


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Directional 30 dB N Coupler From 380 MHz to 4 GHz Rated to 200 Watts PE2CP1073A](#)



Low PIM Directional 30 dB N Coupler From 380 MHz to 4 GHz Rated to 200 Watts

Couplers Technical Data Sheet

PE2CP1073A

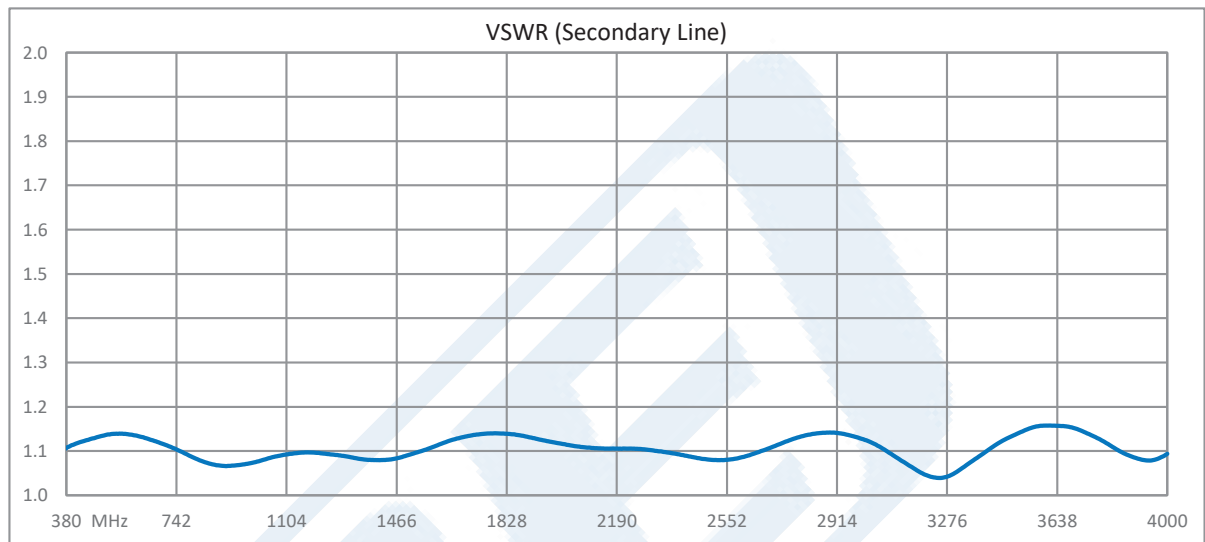

Low PIM Directional 30 dB N Coupler From 380 MHz to 4 GHz Rated to 200 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Directional 30 dB N Coupler From 380 MHz to 4 GHz Rated to 200 Watts PE2CP1073A](https://www.pasternack.com/directional-30-db-n-coupler-698-mhz-2.7-ghz-200-watts-pe2cp1073a-p.aspx)




URL: <https://www.pasternack.com/directional-30-db-n-coupler-698-mhz-2.7-ghz-200-watts-pe2cp1073a-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE2CP1073A CAD Drawing

Low PIM Directional 30 dB N Coupler From 380 MHz to 4 GHz Rated to 200 Watts

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/13/2022	S. PONG

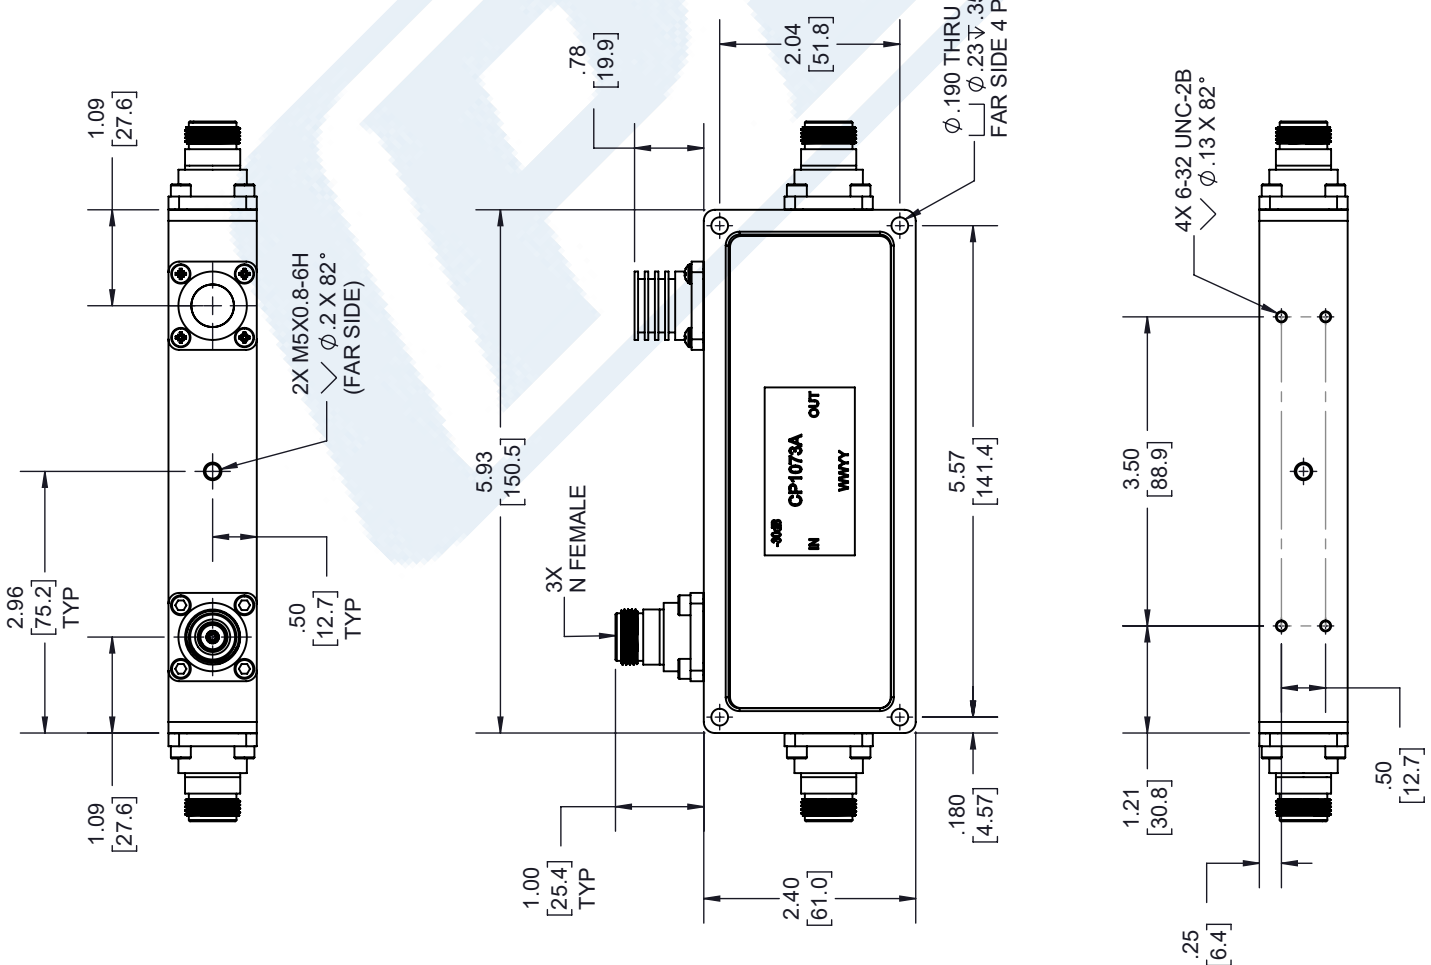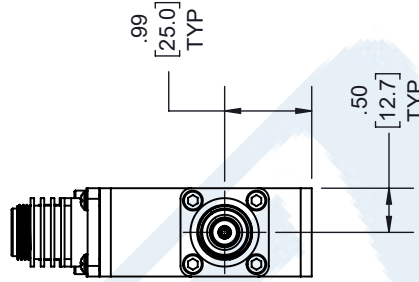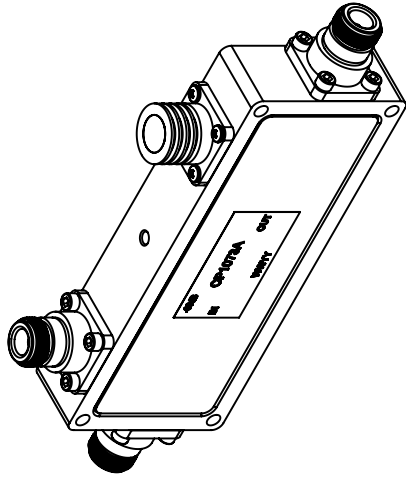

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5.08] FRACTIONS
.XX = ±.02 [.51] ± 1/32
.XXX = ±.005 [.13] ANGLES ± 1°
CABLE LENGTH (L) TOLERANCES:
L ≤ 12 [305] = +1 [25] / -0
12 [305] < L ≤ 60 [1524] = +2 [51] / -0
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
300 [7620] < L = +5% / -0
ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.



THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A



Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

ITEM NO. PE2CP1073A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.