



## SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax

### RF Cable Assemblies Technical Data Sheet

PE3117-60

#### Configuration

- Connector 1: SHV Plug
- Connector 2: SHV Plug
- Cable Type: RG214

#### Features

- Max Frequency 300 MHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3117-60 SHV plug to SHV plug 60 inch cable using RG214 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SHV to SHV cable assembly has a plug to plug gender configuration with 50 ohm flexible RG214 coax. The PE3117-60 SHV plug to SHV plug cable assembly operates to 300 MHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax PE3117-60](#)


**SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax**
**RF Cable Assemblies Technical Data Sheet**
**PE3117-60**
**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	MHz
VSWR			1.5:1	
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			3,500	Vrms

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	300		MHz
Insertion Loss (Max.)	0.264	0.303	0.35	0.366		dB
Insertion Loss (Typ.)	0.25	0.301	0.345	0.36		dB

**Mechanical Specifications**
**Cable Assembly**

Length*	60 in [152.4 cm]
Diameter	0.57 in [14.48 mm]
Weight	0.77 lbs [349.27 g]

**Cable**

Cable Type	RG214
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.425 in [10.8 mm]
Repeated Minimum Bend Radius	1.6 in [40.64 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax PE3117-60](#)

**SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax**

**RF Cable Assemblies Technical Data Sheet**
**PE3117-60**
**Connectors**

Description	Connector 1	Connector 2
Type	SHV Plug	SHV Plug
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 $\mu$ in minimum	30 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 $\mu$ in minimum	100 $\mu$ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 $\mu$ in minimum	100 $\mu$ in minimum

**Environmental Specifications**
**Temperature**

Operating Range

-20 to +80 deg C

**Compliance Certifications** (see product page for current document)

**Plotted and Other Data**

## Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax PE3117-60](#)

## SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax




### RF Cable Assemblies Technical Data Sheet

PE3117-60

#### How to Order

Part Number Configuration:

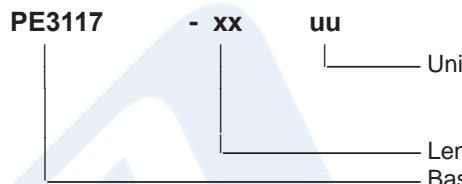

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3117-12 = 12 inches long cable  
PE3117-100cm = 100 cm long cable

SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax PE3117-60](#)

URL: <https://www.pasternack.com/shv-plug-shv-plug-rg214u-cable-assembly-pe3117-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3117-60 CAD Drawing**  
SHV Plug to SHV Plug Cable 60 Inch Length Using RG214 Coax

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in Inches

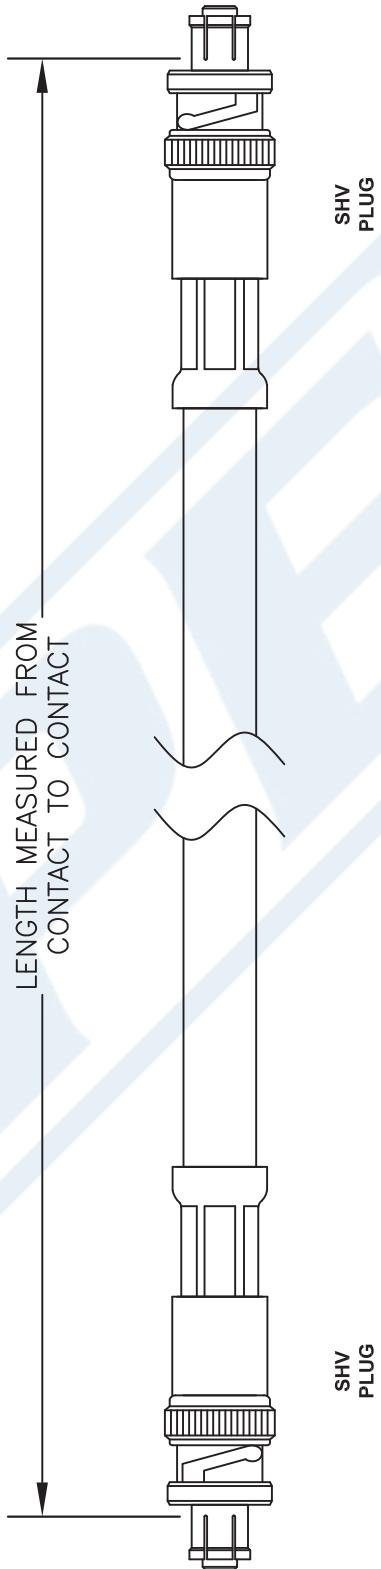

DWG TITLE

**PE3117-XX**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$  WHICHEVER IS GREATER.

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

REV. -	FSCM NO.	53919	CAD FILE	020108	SCALE N/A	SIZE A	127
--------	----------	-------	----------	--------	-----------	--------	-----