

## N Male to N Male Low Loss Cable Using PE-P300LL Coax, LF Solder

### PE330LF





#### Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: PE-P300LL
- Coax Flex Type: Flexible

#### Features

- Max Frequency 18 GHz
- 83% Phase Velocity
- Triple Shielded
- FEP Jacket
- 500 Mating Cycles

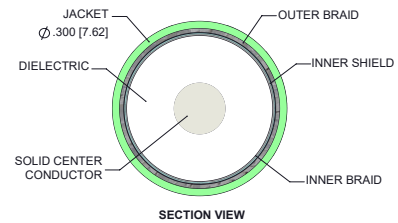

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE330LF type N male to type N male cable using PE-P300LL coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible PE-P300LL coax. The PE330LF type N male to type N male cable assembly operates to 18 GHz. The triple shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
Capacitance		25 [82.02]		pF/ft [pF/m]

#### Specifications by Frequency

## N Male to N Male Low Loss Cable Using PE-P300LL Coax, LF Solder

### PE330LF



Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	1000	2000	4500	9000	18000	MHz	
PE330LF	Custom Lengths Available	Insertion Loss (Typ.)	0.051	0.073	0.112	0.163	0.241	dB/ft	
			0.17	0.24	0.37	0.54	0.8	dB/m	
PE330LF-12	12 inch	Insertion Loss (Typ.)	0.26	0.28	0.32	0.37	0.45	dB	0.285
PE330LF-24	24 inch	Insertion Loss (Typ.)	0.31	0.35	0.43	0.53	0.69	dB	0.363
PE330LF-36	36 inch	Insertion Loss (Typ.)	0.36	0.42	0.54	0.69	0.93	dB	0.44
PE330LF-48	60 inch	Insertion Loss (Typ.)	0.46	0.57	0.76	1.02	1.41	dB	0.517
PE330LF-60	72 inch	Insertion Loss (Typ.)	0.51	0.64	0.88	1.18	1.65	dB	0.594

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.285 pounds
Additional Weight per Inch:	0.00642 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.285 lbs [129.27 g]

#### Cable

Cable Type	PE-P300LL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	3
Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Aluminum Polyester
Shield Layer 3	Silver Plated Copper Wire
Jacket Material	FEP, Green
Jacket Diameter	0.3 in [7.62 mm]
Repeated Minimum Bend Radius	1.5 in [38.1 mm]

## N Male to N Male Low Loss Cable Using PE-P300LL Coax, LF Solder



### PE330LF

#### Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	500
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Beryllium Copper, Gold over Nickel
Contact Plating Specification	50 µin minimum	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Hex Size	3/4 inch	3/4 inch
Torque	19 in-lbs 2.15 Nm	19 in-lbs 2.15 Nm

#### Environmental Specifications

Operating Range Temperature -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## N Male to N Male Low Loss Cable Using PE-P300LL Coax, LF Solder



### PE330LF

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE330LF**    **- xx**    **uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example:    PE330LF-12 = 12 inches long cable  
              PE330LF-100cm = 100 cm long cable


N Male to N Male Low Loss Cable Using PE-P300LL Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using PE-P300LL Coax, LF Solder PE330LF](#)

URL: <https://www.pasternack.com/n-male-to-n-male-low-loss-cable-using-pe-p300ll-lf-solder-pe330lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE330LF CAD Drawing
N Male to N Male Low Loss Cable Using PE-P300LL Coax, LF Solder

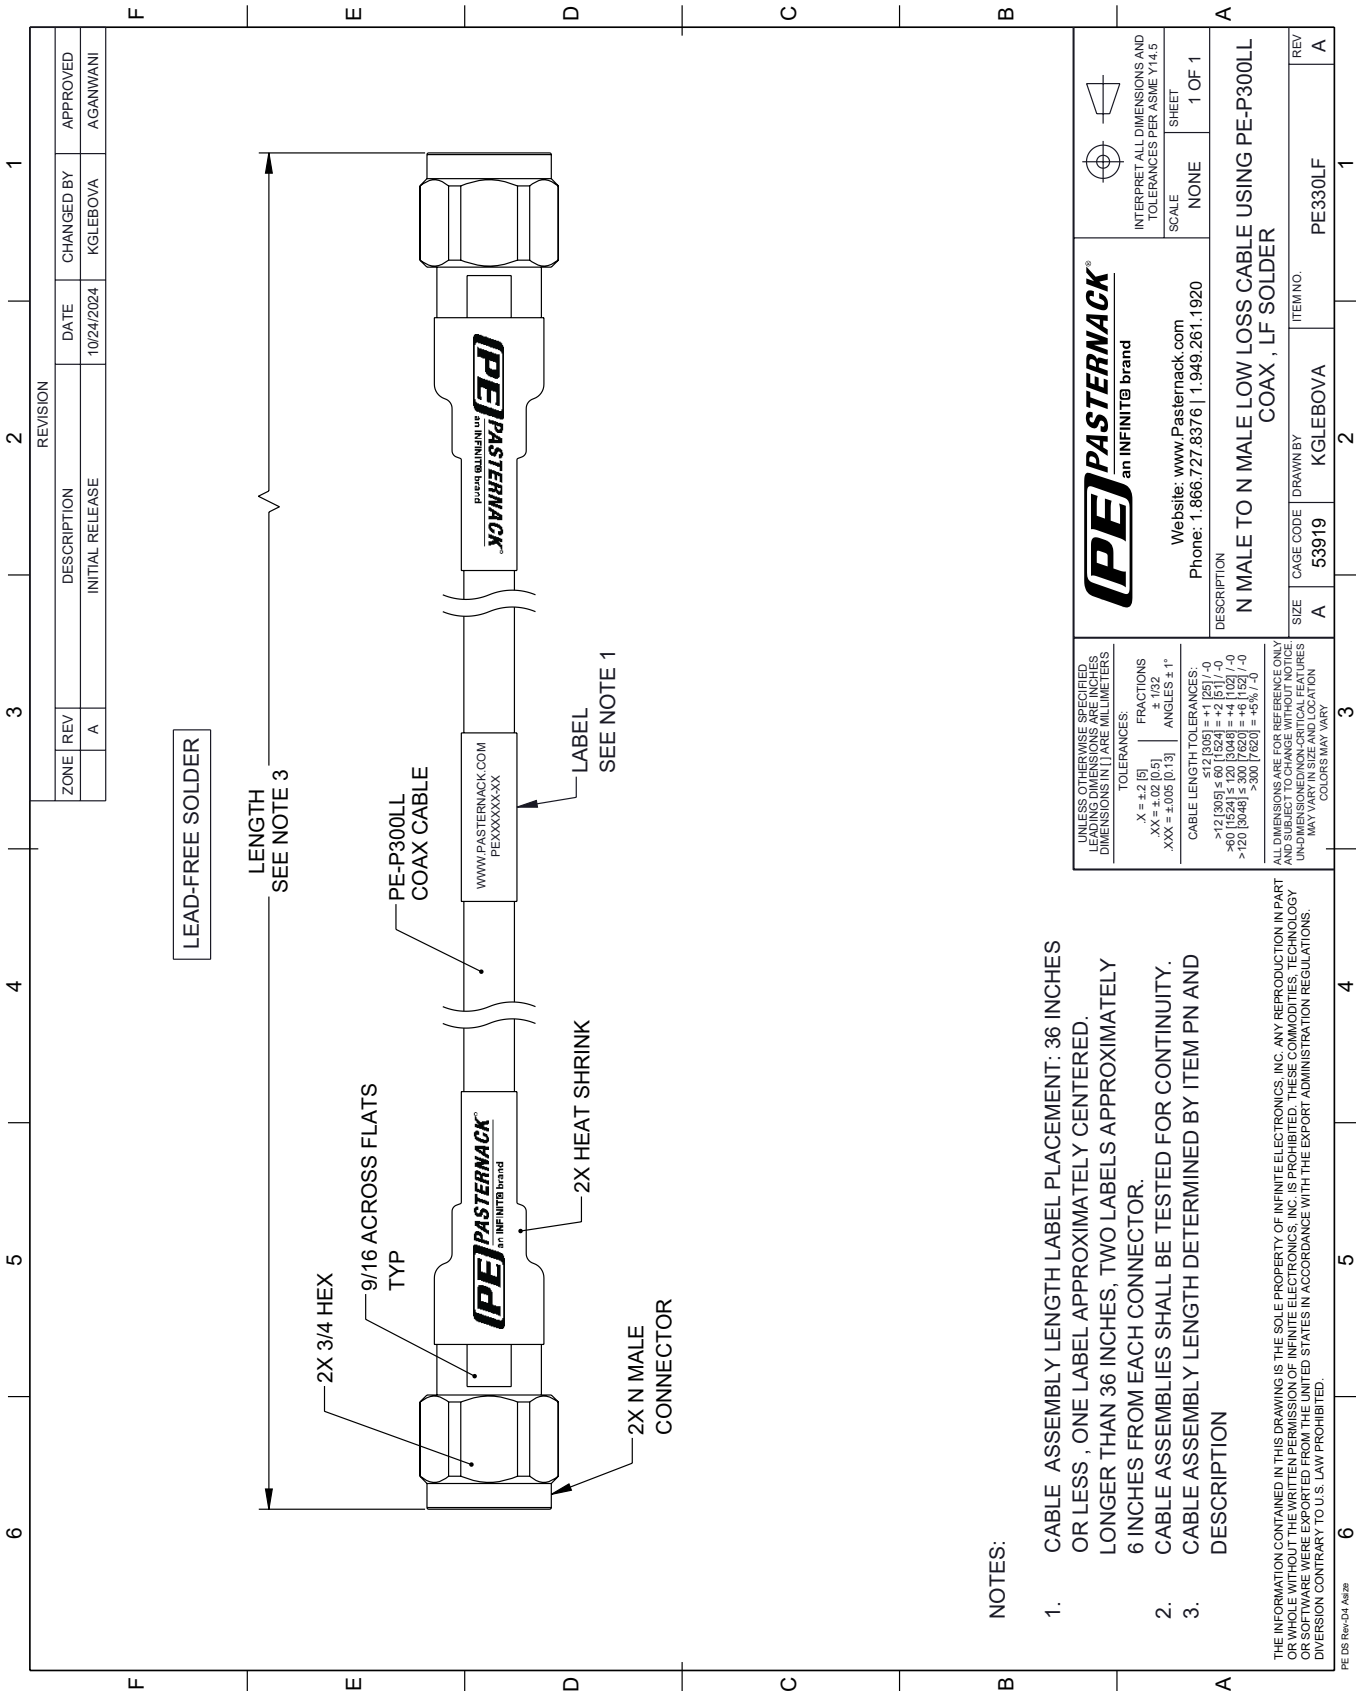

<b>UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES, OTHER DIMENSIONS IN [ ] ARE MILLIMETERS</b>		<b>PE PASTERNAK®</b> an INFINITE® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a>		SCALE	
.X = ±.2 [5]		Phone: 1.866.727.8376   1.949.261.1920		NONE	
.XX = ±.02 [0.5]				SHEET	
.XXX = ±.005 [0.13]				1 OF 1	
FRACTIONS					
± 1/32					
ANGLES ± 1°					
CABLE LENGTH TOLERANCES:					
±.12 [3.05]					
>.12 [3.05] ≤ .60 [15.24] = ±.12 [3.05] / -0					
>.60 [15.24] ≤ 120 [3048] = ±.12 [3.05] / -0					
>120 [3048] ≤ 300 [7620] = ±.12 [3.05] / -0					
>300 [7620] = ±.12 [3.05] / -0					
ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.					
DESCRIPTION		N MALE TO N MALE LOW LOSS CABLE USING PE-P300LL COAX, LF SOLDER			
SIZE		CAGE CODE		ITEM NO.	
A		53919		PE330LF	
DRAWN BY		KGLEBOVA		REV	
A		2		A	

- NOTES:
- 1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
  - 2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
  - 3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE DEVELOPED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.