

## SMA Male to SMA Male Cable Using RG141 Coax




### PE34387

#### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: RG141
- Coax Flex Type: Flexible

#### Features

- Max Frequency 10 GHz
- PTFE (FG) Jacket

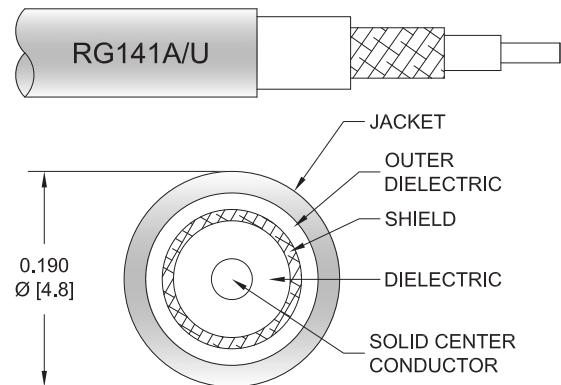

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE34387 SMA male to SMA male cable using RG141 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible RG141 coax. The PE34387 SMA male to SMA male cable assembly operates to 10 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.4:1	
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Dielectric Withstanding Voltage (AC)			1,000	Vrms
Jacket Spark			2,000	Vrms

#### Specifications by Frequency

## SMA Male to SMA Male Cable Using RG141 Coax



### PE34387

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)			
			Frequency		500		1000			2500		5000
PE34387	Custom Lengths Available	Insertion Loss (Typ.)	0.079	0.13	0.216	0.36	0.62	dB/ft				
			0.26	0.43	0.71	1.19	2.04	dB/m				
PE34387-12	12 inch	Insertion Loss (Typ.)	0.28	0.33	0.42	0.56	0.82	dB	0.065			
PE34387-24	24 inch	Insertion Loss (Typ.)	0.36	0.46	0.64	0.92	1.44	dB	0.098			
PE34387-36	36 inch	Insertion Loss (Typ.)	0.44	0.59	0.85	1.28	2.06	dB	0.131			
PE34387-48	48 inch	Insertion Loss (Typ.)	0.52	0.72	1.07	1.64	2.68	dB	0.164			
PE34387-60	60 inch	Insertion Loss (Typ.)	0.6	0.85	1.28	2	3.3	dB	0.197			

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.065 pounds
Additional Weight per Inch:	0.00275 pounds

### Mechanical Specifications

#### Cable Assembly

Weight 0.065 lbs [29.48 g]

#### Cable

Cable Type	RG141
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper
Jacket Material	PTFE (FG), Beige
Jacket Diameter	0.19 in [4.83 mm]

## SMA Male to SMA Male Cable Using RG141 Coax



### PE34387

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50μ in. minimum	50μ in. minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100μ in. minimum	100μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100μ in. minimum	100μ in. minimum
Hex Size	5/16 in	5/16 in
Torque	5 in-lbs 0.57 Nm	5 in-lbs 0.57 Nm

#### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Values at 25°C, sea level.

## SMA Male to SMA Male Cable Using RG141 Coax




### PE34387

#### Typical Performance Data

#### How to Order

Part Number Configuration:

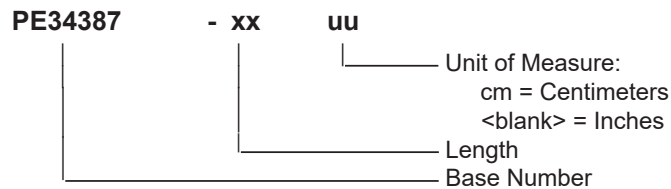

Example:    PE34387-12 = 12 inches long cable  
              PE34387-100cm = 100 cm long cable

SMA Male to SMA Male Cable Using RG141 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable Using RG141 Coax PE34387](#)

URL: <https://www.pasternack.com/sma-male-to-sma-male-cable-using-rg141-pe34387-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE34387 CAD Drawing

SMA Male to SMA Male Cable Using RG141 Coax

