

SMC Plug Right Angle to SMC Jack Bulkhead Cable 36 Inch Length Using PE-B100 Coax




PE34486LF-36

Configuration

- Connector 1: SMC Plug Right Angle
- Connector 2: SMC Jack Bulkhead
- Cable Type: PE-B100
- Coax Flex Type: Flexible

Features

- Max Frequency 4 GHz
- 62% Phase Velocity
- Double Shielded
- PVC Jacket

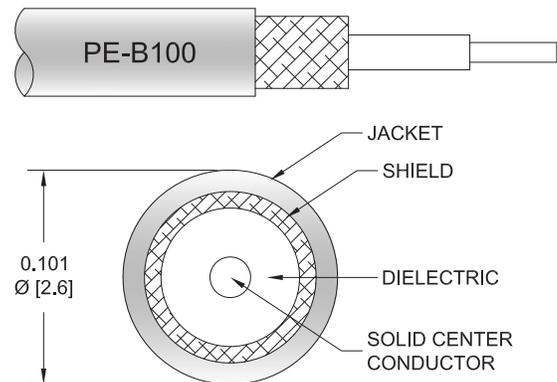

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE34486LF-36 SMC plug right angle to SMC jack bulkhead 36 inch cable using PE-B100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMC to SMC cable assembly has a plug to jack gender configuration with 50 ohm flexible PE-B100 coax. The PE34486LF-36 SMC plug to SMC jack cable assembly operates to 4 GHz. The right angle SMC interface on the PE-B100 cable allows for easier connections in tight spaces. Our RF cable assembly with SMC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		62		%
Capacitance		38 [124.67]		pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms

Mechanical Specifications

Cable Assembly

Width/Diameter

0.451 in [11.46 mm]

Weight

0.013 lbs [5.9 g]

SMC Plug Right Angle to SMC Jack Bulkhead
Cable 36 Inch Length Using PE-B100 Coax



PE34486LF-36

Cable

Cable Type	PE-B100
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	PVC
Shield Layer 2	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.101 in [2.57 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMC Plug Right Angle	SMC Jack Bulkhead
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	30μ in. minimum	30μ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100μ in. minimum	100μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100μ in. minimum	
Hex Size	1/4 in.	
Torque	3 in-lbs 0.34 Nm	

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:
Values at 25°C, sea level.

SMC Plug Right Angle to SMC Jack Bulkhead Cable 36 Inch Length Using PE-B100 Coax




PE34486LF-36

Typical Performance Data

How to Order

Part Number Configuration:

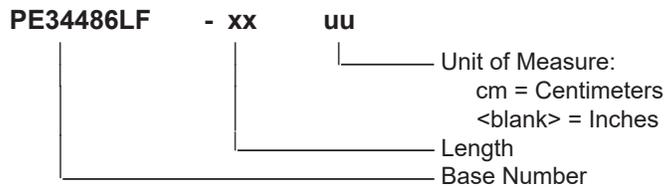

Example: PE34486LF-12 = 12 inches long cable
PE34486LF-100cm = 100 cm long cable

SMC Plug Right Angle to SMC Jack Bulkhead Cable 36 Inch Length Using PE-B100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMC Plug Right Angle to SMC Jack Bulkhead Cable 36 Inch Length Using PE-B100 Coax PE34486LF-36](#)

URL: <https://www.pasternack.com/smc-plug-smc-jack-pe-b100-cable-assembly-pe34486lf-36-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE34486LF-36 CAD Drawing

SMC Plug Right Angle to SMC Jack Bulkhead Cable 36 Inch Length Using PE-B100 Coax

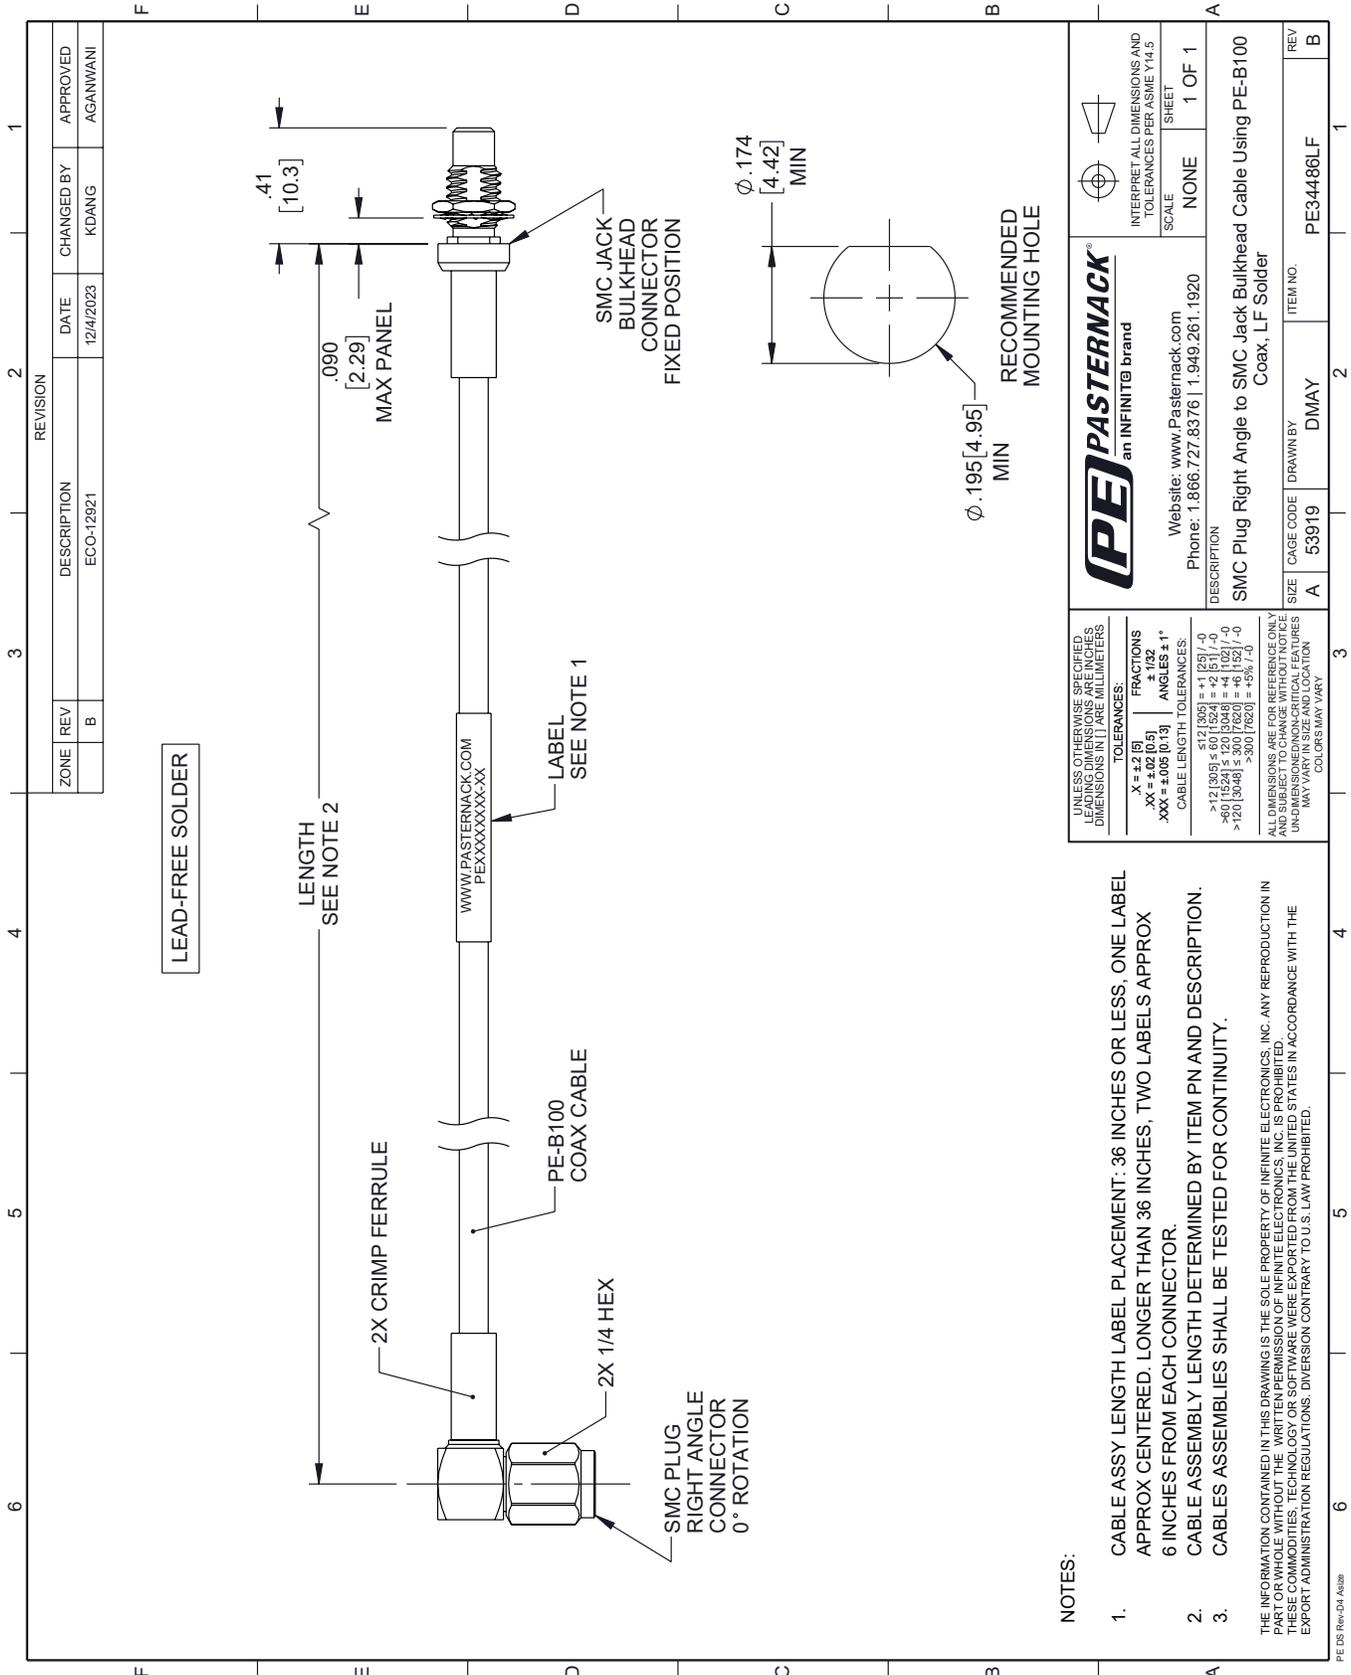

LEAD-FREE SOLDER

LENGTH
SEE NOTE 2

2X CRIMP FERRULE

WWW.PASTERNAK.COM
PEXXXXXXXXXX

LABEL
SEE NOTE 1

PE-B100
COAX CABLE

2X 1/4 HEX

SMC PLUG
RIGHT ANGLE
CONNECTOR
0° ROTATION

SMC JACK
BULKHEAD
CONNECTOR
FIXED POSITION

φ.174
[4.42]
MIN

φ.195 [4.95]
MIN

RECOMMENDED
MOUNTING HOLE

NOTES:

1. CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
3. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.	
TOLERANCES:	FRACTIONS
.X = ±.2 [5]	± 1/32
.XX = ±.02 [0.5]	± 1/64
.XXX = ±.005 [0.13]	ANGLES ± 1°
CABLE LENGTH TOLERANCES:	
<12 [305]	±.12 [3.05]
>12 [305] ≤ 60 [1524]	±.12 [3.05]
>60 [1524] ≤ 120 [3048]	±.12 [3.05]
>120 [3048]	±.12 [3.05]
>300 [7620]	±.12 [3.05]

PE PASTERNAK
an INFINITB brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION
SMC Plug Right Angle to SMC Jack Bulkhead Cable Using PE-B100 Coax, LF Solder

SCALE NONE
SHEET 1 OF 1

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-12921	12/14/2023	KDANG	AGANWANI

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	DMAY	PE34486LF	B