



MMCX Plug to MMCX Plug Right Angle Cable
60 Inch Length Using RG174 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34881LF-60

Configuration

- Connector 1: MMCX Plug
- Connector 2: MMCX Plug Right Angle
- Cable Type: RG174

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE34881LF-60 MMCX plug to MMCX plug right angle 60 inch cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MMCX to MMCX cable assembly has a plug to plug gender configuration with 50 ohm flexible RG174 coax. The PE34881LF-60 MMCX plug to MMCX plug cable assembly operates to 1 GHz. The right angle MMCX interface on the RG174 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

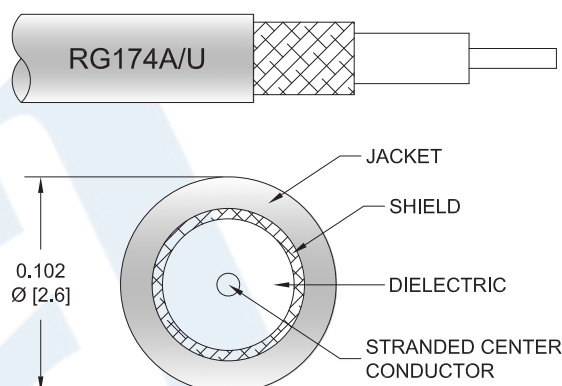

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to MMCX Plug Right Angle Cable 60 Inch Length Using RG174 Coax, RoHS PE34881LF-60](#)



MMCX Plug to MMCX Plug Right Angle Cable
60 Inch Length Using RG174 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34881LF-60

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.41	0.62	0.885	1.258	1.8	dB
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

Mechanical Specifications

Cable Assembly

Length*	60 in [152.4 cm]
Diameter	0.276 in [7.01 mm]
Weight	0.048 lbs [21.77 g]

Cable

Cable Type	RG174
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE (LD)
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.1 in [2.54 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to MMCX Plug Right Angle Cable 60 Inch Length Using RG174 Coax, RoHS PE34881LF-60](#)



MMCX Plug to MMCX Plug Right Angle Cable 60 Inch Length Using RG174 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34881LF-60

Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug	MMCX Plug Right Angle
Specification	BS EN 122340	BS EN 122340
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30μ in. minimum	30μ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	3μ in. minimum	3μ in. minimum

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to MMCX Plug Right Angle Cable 60 Inch Length Using RG174 Coax, RoHS PE34881LF-60](#)



MMCX Plug to MMCX Plug Right Angle Cable
60 Inch Length Using RG174 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34881LF-60

How to Order

Part Number Configuration:

PE34881LF

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE34881LF-12 = 12 inches long cable
PE34881LF-100cm = 100 cm long cable

MMCX Plug to MMCX Plug Right Angle Cable 60 Inch Length Using RG174 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to MMCX Plug Right Angle Cable 60 Inch Length Using RG174 Coax, RoHS PE34881LF-60](https://www.pasternack.com/mmcx-plug-mmcx-plug-right-angle-cable-60-inch-length-using-rg174-coax-rohs-pe34881lf-60)

URL: <https://www.pasternack.com/mmcx-plug-mmcx-plug-rg174au-cable-assembly-pe34881lf-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34881LF-60 CAD Drawing

MMCX Plug to MMCX Plug Right Angle Cable 60 Inch Length Using RG174 Coax, RoHS

