



SMA Male to TNC Female Cable 100 cm
Length Using RG142 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3491LF-100CM

Configuration

- Connector 1: SMA Male
- Connector 2: TNC Female
- Cable Type: RG142

Features

- Max Frequency 3 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3491LF-100CM SMA male to TNC female 100 cm cable using RG142 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to TNC cable assembly has a male to female gender configuration with 50 ohm flexible RG142 coax. The PE3491LF-100CM SMA male to TNC female cable assembly operates to 3 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

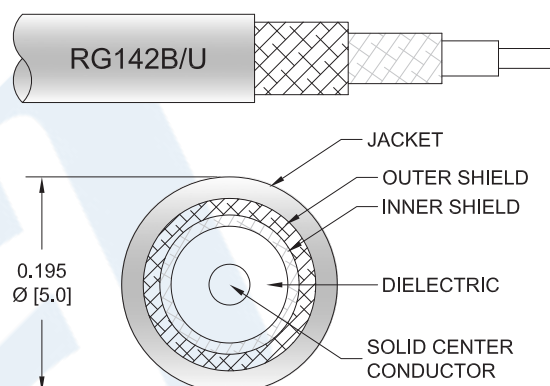

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Female Cable 100 cm Length Using RG142 Coax , LF Solder PE3491LF-100CM](#)



SMA Male to TNC Female Cable 100 cm
Length Using RG142 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3491LF-100CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.45:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.63	0.86	1.15	1.58	2.76	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length* 39.37 in [100 cm]

Cable

Cable Type RG142
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 2
Shield Layer 1 Silver Plated Copper Braid
Shield Layer 2 Silver Plated Copper Braid
Jacket Material FEP, Tan
Jacket Diameter 0.195 in [4.95 mm]

Repeated Minimum Bend Radius 1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Female Cable 100 cm Length Using RG142 Coax , LF Solder PE3491LF-100CM](#)



SMA Male to TNC Female Cable 100 cm
Length Using RG142 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3491LF-100CM

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	TNC Female
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	50 µin minimum	
Dielectric Type	PTFE	
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	
Hex Size	5/16 inch	
Torque	3 in-lbs [0.34 Nm]	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Female Cable 100 cm Length Using RG142 Coax , LF Solder PE3491LF-100CM](#)



SMA Male to TNC Female Cable 100 cm
Length Using RG142 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3491LF-100CM

How to Order

Part Number Configuration:

PE3491LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3491LF-12 = 12 inches long cable
PE3491LF-100cm = 100 cm long cable

SMA Male to TNC Female Cable 100 cm Length Using RG142 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Female Cable 100 cm Length Using RG142 Coax , LF Solder PE3491LF-100CM](https://www.pasternack.com/sma-male-tnc-female-rg142bu-cable-assembly-pe3491lf-100cm-p.aspx)


URL: <https://www.pasternack.com/sma-male-tnc-female-rg142bu-cable-assembly-pe3491lf-100cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3491LF-100CM CAD Drawing

SMA Male to TNC Female Cable 100 cm Length Using RG142 Coax , LF Solder

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/19/2020	S. ELLIS

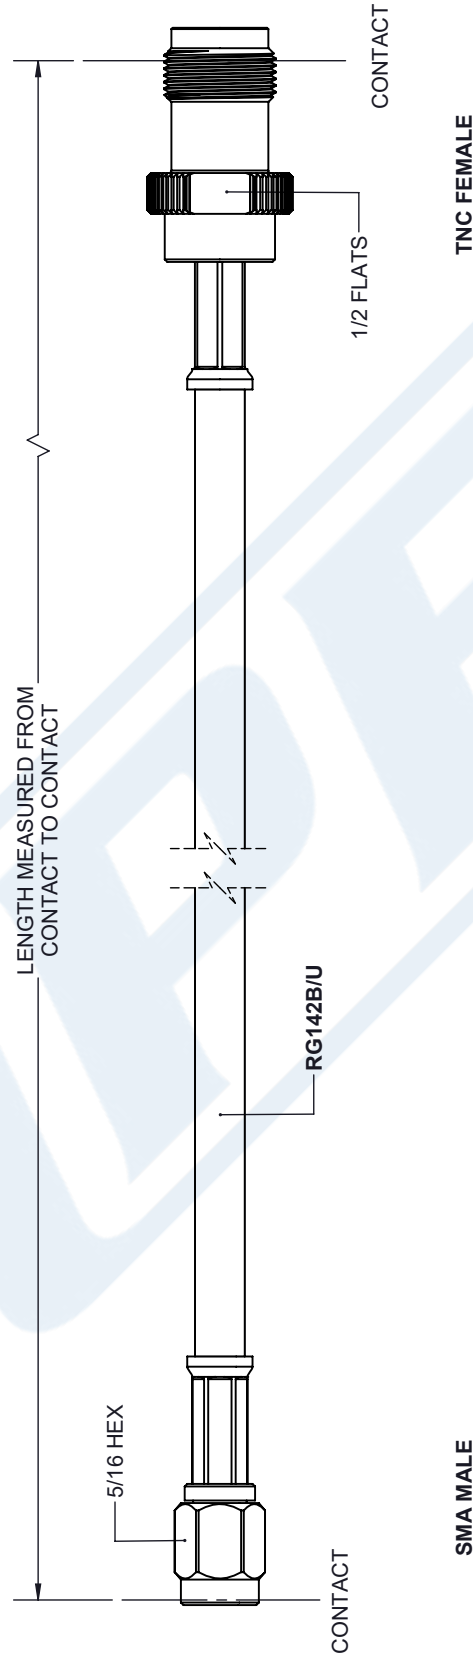

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS				THIRD-ANGLE PROJECTION					
TOLERANCES:									
X = ± .2 [.008] FRACTIONS				THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.					
.XX = ± .02 [.51] ± 1/32				SHEET 1 OF 1					
XXX = ± .005 [.13] ANGLES ± 1°				SCALE N/A					
CABLE LENGTH (L) TOLERANCES:									
L ≤ 12 [305] ± .1 [25] / -0									
12 [305] < L ≤ 60 [1524] ± .2 [51] / -0									
60 [1524] < L ≤ 120 [3048] ± .4 [102] / -0									
120 [3048] < L ≤ 300 [7620] ± .6 [152] / -0									
300 [7620] < L ± .5% / -0									
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.				REV A					
SIZE A				CAGE CODE 53919		DRAWN BY K.DANG		ITEM NO. PE3491LF	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.