

N Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax with HeatShrink, LF Solder




PE3753LF/HS

Configuration

- Connector 1: N Male Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: RG400
- Coax Flex Type: Flexible

Features

- Max Frequency 1 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

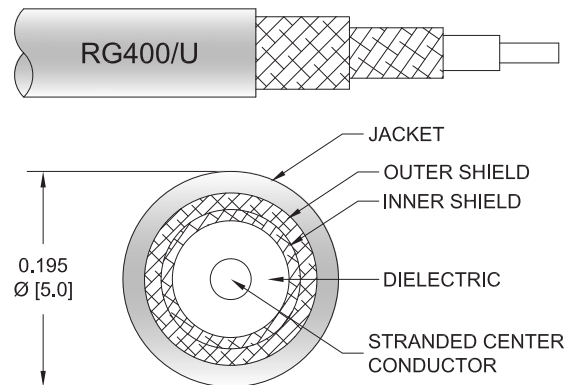

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3753LF/HS type N male right angle to SMA male right angle cable using RG400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to SMA cable assembly has a male to male gender configuration with 50 ohm flexible RG400 coax. The PE3753LF/HS type N male to SMA male cable assembly operates to 1 GHz. The right angle type N and right angle SMA interfaces on the RG400 cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		32 [104.99]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Specifications by Frequency

N Male Right Angle to SMA Male Right Angle Cable
Using RG400 Coax with HeatShrink, LF Solder



PE3753LF/HS

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		50	100	250	500	
PE3753LF/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.011	0.023	0.056	0.1	0.147	dB/ft	
			0.04	0.08	0.19	0.33	0.49	dB/m	
PE3753LF/HS-6	6 inch	Insertion Loss (Typ.)	0.41	0.42	0.43	0.45	0.48	dB	0.167
PE3753LF/HS-12	12 inch	Insertion Loss (Typ.)	0.42	0.43	0.46	0.5	0.55	dB	0.188
PE3753LF/HS-24	24 inch	Insertion Loss (Typ.)	0.43	0.45	0.52	0.6	0.7	dB	0.23
PE3753LF/HS-36	36 inch	Insertion Loss (Typ.)	0.44	0.47	0.57	0.7	0.85	dB	0.272
PE3753LF/HS-72	72 inch	Insertion Loss (Typ.)	0.47	0.54	0.74	1	1.29	dB	0.398

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB
 Loss due to Connector 2: 0.2 dB
 Base Weight: 0.188 pounds
 Additional Weight per Inch: 0.0035 pounds

Mechanical Specifications

Cable Assembly

Weight 0.188 lbs [85.28 g]

Cable

Cable Type RG400
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper, Silver
 Dielectric Type PTFE
 Number of Shields 2
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.195 in [4.95 mm]
 Repeated Minimum Bend Radius 1 in [25.4 mm]

N Male Right Angle to SMA Male Right Angle Cable
Using RG400 Coax with HeatShrink, LF Solder



PE3753LF/HS

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle	SMA Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Mating Cycles	500	
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum
Hex Size		5/16 inch
Torque		3 in-lbs 0.34 Nm

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

N Male Right Angle to SMA Male Right Angle Cable
Using RG400 Coax with HeatShrink, LF Solder




PE3753LF/HS

Typical Performance Data

How to Order

Part Number Configuration:

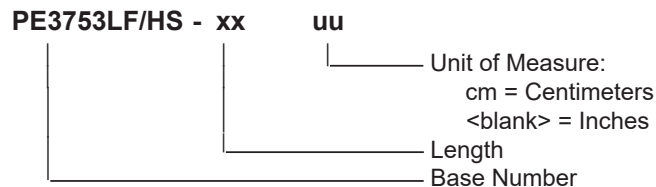

Example: PE3753LF/HS-12 = 12 inches long cable
PE3753LF/HS-100cm = 100 cm long cable

N Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax with HeatShrink, LF Solder PE3753LF/HS](#)

URL: <https://www.pasternack.com/n-male-right-angle-to-sma-male-cable-using-rg400-with-heatshrink-lf-solder-pe3753lf-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3753LF/HS CAD Drawing

N Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax with HeatShrink, LF Solder

