




Violet FAKRA Plug to FAKRA Jack Right Angle Cable
12 Inch Length Using PE-C100-LSZH Coax

RF Cable Assemblies Technical Data Sheet

PE38749H-12

Configuration

- Connector 1: FAKRA Plug
- Connector 2: FAKRA Jack Right Angle
- Cable Type: PE-C100-LSZH

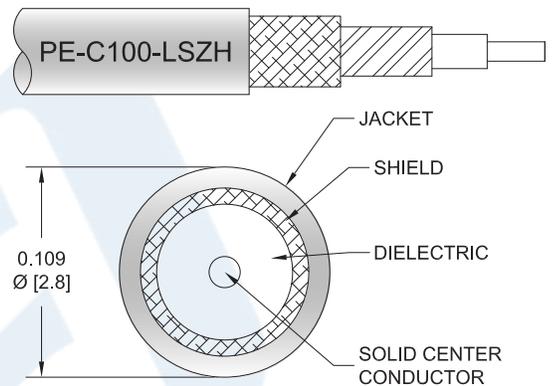

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|---------------|---------|--------------|
| Velocity of Propagation | | 66 | | % |
| RF Shielding | 90 | | | dB |
| Capacitance | | 30.8 [101.05] | | pF/ft [pF/m] |
| Inductance | | 0.077 [0.25] | | uH/ft [uH/m] |
| Jacket Spark | | | 2,000 | Vrms |

Mechanical Specifications

Cable Assembly

| | |
|----------|--------------------|
| Length* | 12 in [304.8 mm] |
| Diameter | 0.37 in [9.4 mm] |
| Weight | 0.04 lbs [18.14 g] |

Cable

| | |
|--------------------------------------|---------------------|
| Cable Type | PE-C100-LSZH |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper Clad Steel |
| Dielectric Type | PE |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Violet FAKRA Plug to FAKRA Jack Right Angle Cable 12 Inch Length Using PE-C100-LSZH Coax PE38749H-12](#)



Violet FAKRA Plug to FAKRA Jack Right Angle Cable
12 Inch Length Using PE-C100-LSZH Coax

RF Cable Assemblies Technical Data Sheet

PE38749H-12

| | |
|------------------------------|------------------------|
| Jacket Material | LSZH, Black |
| Jacket Diameter | 0.109 in [2.77 mm] |
| One Time Minimum Bend Radius | 0.25 in [6.35 mm] |
| Repeated Minimum Bend Radius | 1 in [25.4 mm] |
| Bending Moment | 0.1 lbs-ft [0.14 N-m] |
| Flat Plate Crush | 10 lbs/in [0.18 Kg/mm] |
| Tensile Strength | 15 lbs [6.8 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|--------------------------------------|-----------------------|------------------------|
| Type | FAKRA Plug | FAKRA Jack Right Angle |
| Impedance | 50 Ohms | 50 Ohms |
| Configuration | Straight | Right Angle |
| Contact Material and Plating | Phosphor Bronze, Gold | Phosphor Bronze, Gold |
| Dielectric Type | Teflon | Teflon/Delrin |
| Outer Conductor Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Material and Plating | Plastic | Plastic |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8$ ", whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Violet FAKRA Plug to FAKRA Jack Right Angle Cable 12 Inch Length Using PE-C100-LSZH Coax PE38749H-12](#)



Violet FAKRA Plug to FAKRA Jack Right Angle Cable
12 Inch Length Using PE-C100-LSZH Coax

RF Cable Assemblies Technical Data Sheet

PE38749H-12

How to Order

Part Number Configuration:

PE38749H

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE38749H-12 = 12 inches long cable
PE38749H-100cm = 100 cm long cable

Violet FAKRA Plug to FAKRA Jack Right Angle Cable 12 Inch Length Using PE-C100-LSZH Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Violet FAKRA Plug to FAKRA Jack Right Angle Cable 12 Inch Length Using PE-C100-LSZH Coax PE38749H-12](https://www.pasternack.com/fakra-plug-fakra-jack-pe-c100-cable-assembly-pe38749h-12-p.aspx)

URL: <https://www.pasternack.com/fakra-plug-fakra-jack-pe-c100-cable-assembly-pe38749h-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE38749H-12 CAD Drawing

Violet FAKRA Plug to FAKRA Jack Right Angle Cable 12 Inch Length Using PE-C100 Coax

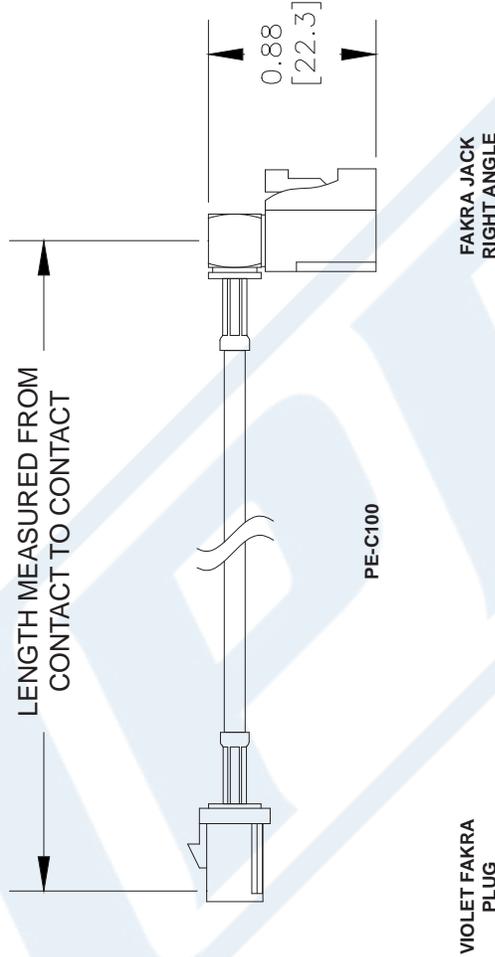

| How To Order | | Part # Ext. | Length In Inches | Part # Ext. | Length In Centimeters |
|------------------------------------|----------------|-------------|------------------|-------------|-----------------------|
| Part Number Configuration | Examples | -12 | 12" | -25CM | 25Cm |
| PE3 [zzz] [yy] - [xx] [uu] | PE3000LF-100 | -24 | 24" | -50CM | 50Cm |
| 00 - 99999 | PE3000-100 | -36 | 36" | -75CM | 75Cm |
| LF = RoHS Compliant | PE3000LF-100CM | -48 | 48" | -100CM | 100Cm |
| < Blank > = Standard | PE3000-100CM | -60 | 60" | -125CM | 125Cm |
| Note: LF applies only to RF cables | | -xx | Custom Length | -xxCM | Custom Length |

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE
PE38749H

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

| | | | |
|----------------|----------------|-----------|--------|
| FSCM NO. 53919 | CAD FILE 41613 | SCALE N/A | SIZE A |
|----------------|----------------|-----------|--------|