



TNC Male to TNC Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components, LF Solder

TECHNICAL DATA SHEET


PE3C0246LF

Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: LMR-400-UF
- Coax Flex Type: Flexible

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket
- 500 Mating Cycles

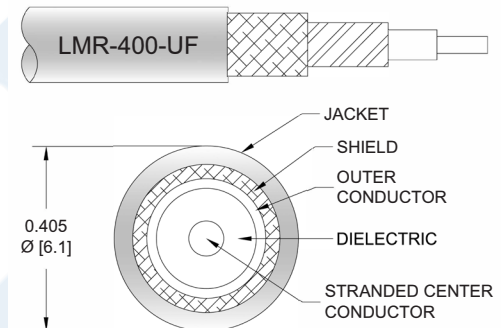

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C0246LF TNC male to TNC male cable using LMR-400-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400-UF coax. The PE3C0246LF TNC male to TNC male cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components, LF Solder PE3C0246LF](#)



TNC Male to TNC Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components, LF Solder

TECHNICAL DATA SHEET

PE3C0246LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.07 [3.51]		Ω /1000ft [Ω /Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ω /1000ft [Ω /Km]
Jacket Spark			8,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3C0246LF	Custom Lengths Available	Insertion Loss (Typ.)	0.02	0.03	0.05	0.08	0.13	dB/ft	
			0.07	0.1	0.17	0.27	0.43	dB/m	
PE3C0246LF-12	12 inch	Insertion Loss (Typ.)	0.52	0.53	0.55	0.58	0.63	dB	0.269
PE3C0246LF-36	36 inch	Insertion Loss (Typ.)	0.56	0.59	0.65	0.74	0.89	dB	0.443
PE3C0246LF-60	60 inch	Insertion Loss (Typ.)	0.6	0.65	0.75	0.9	1.15	dB	0.617
PE3C0246LF-120	120 inch	Insertion Loss (Typ.)	0.7	0.8	1	1.3	1.8	dB	1.052
PE3C0246LF-300	300 inch	Insertion Loss (Typ.)	1	1.25	1.75	2.5	3.75	dB	2.357

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.25 dB
Loss due to Connector 2:	0.25 dB
Base Weight:	0.269 pounds
Additional Weight per Inch:	0.00725 pounds

Mechanical Specifications

Cable Assembly

Weight 0.269 lbs [122.02 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components, LF Solder PE3C0246LF](#)



TNC Male to TNC Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components, LF Solder

TECHNICAL DATA SHEET

PE3C0246LF

Cable

Cable Type	LMR-400-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	TPE, Black
Jacket Diameter	0.405 in [10.29 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.38 lbs-ft [0.52 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Threaded	TNC Male Threaded
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 µin minimum	50 µin minimum
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80 µin minimum	80 µin minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	80 µin minimum	80 µin minimum

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components, LF Solder PE3C0246LF](#)



TNC Male to TNC Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components, LF Solder

TECHNICAL DATA SHEET

PE3C0246LF

How to Order

Part Number Configuration:

PE3C0246LF - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number


Example: PE3C0246LF-12 = 12 inches long cable
PE3C0246LF-100cm = 100 cm long cable

TNC Male to TNC Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components, LF Solder PE3C0246LF](https://www.pasternack.com/tnc-male-to-tnc-male-low-loss-cable-using-lmr-400-uf-lf-solder-pe3c0246lf-p.aspx)

URL: <https://www.pasternack.com/tnc-male-to-tnc-male-low-loss-cable-using-lmr-400-uf-lf-solder-pe3c0246lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

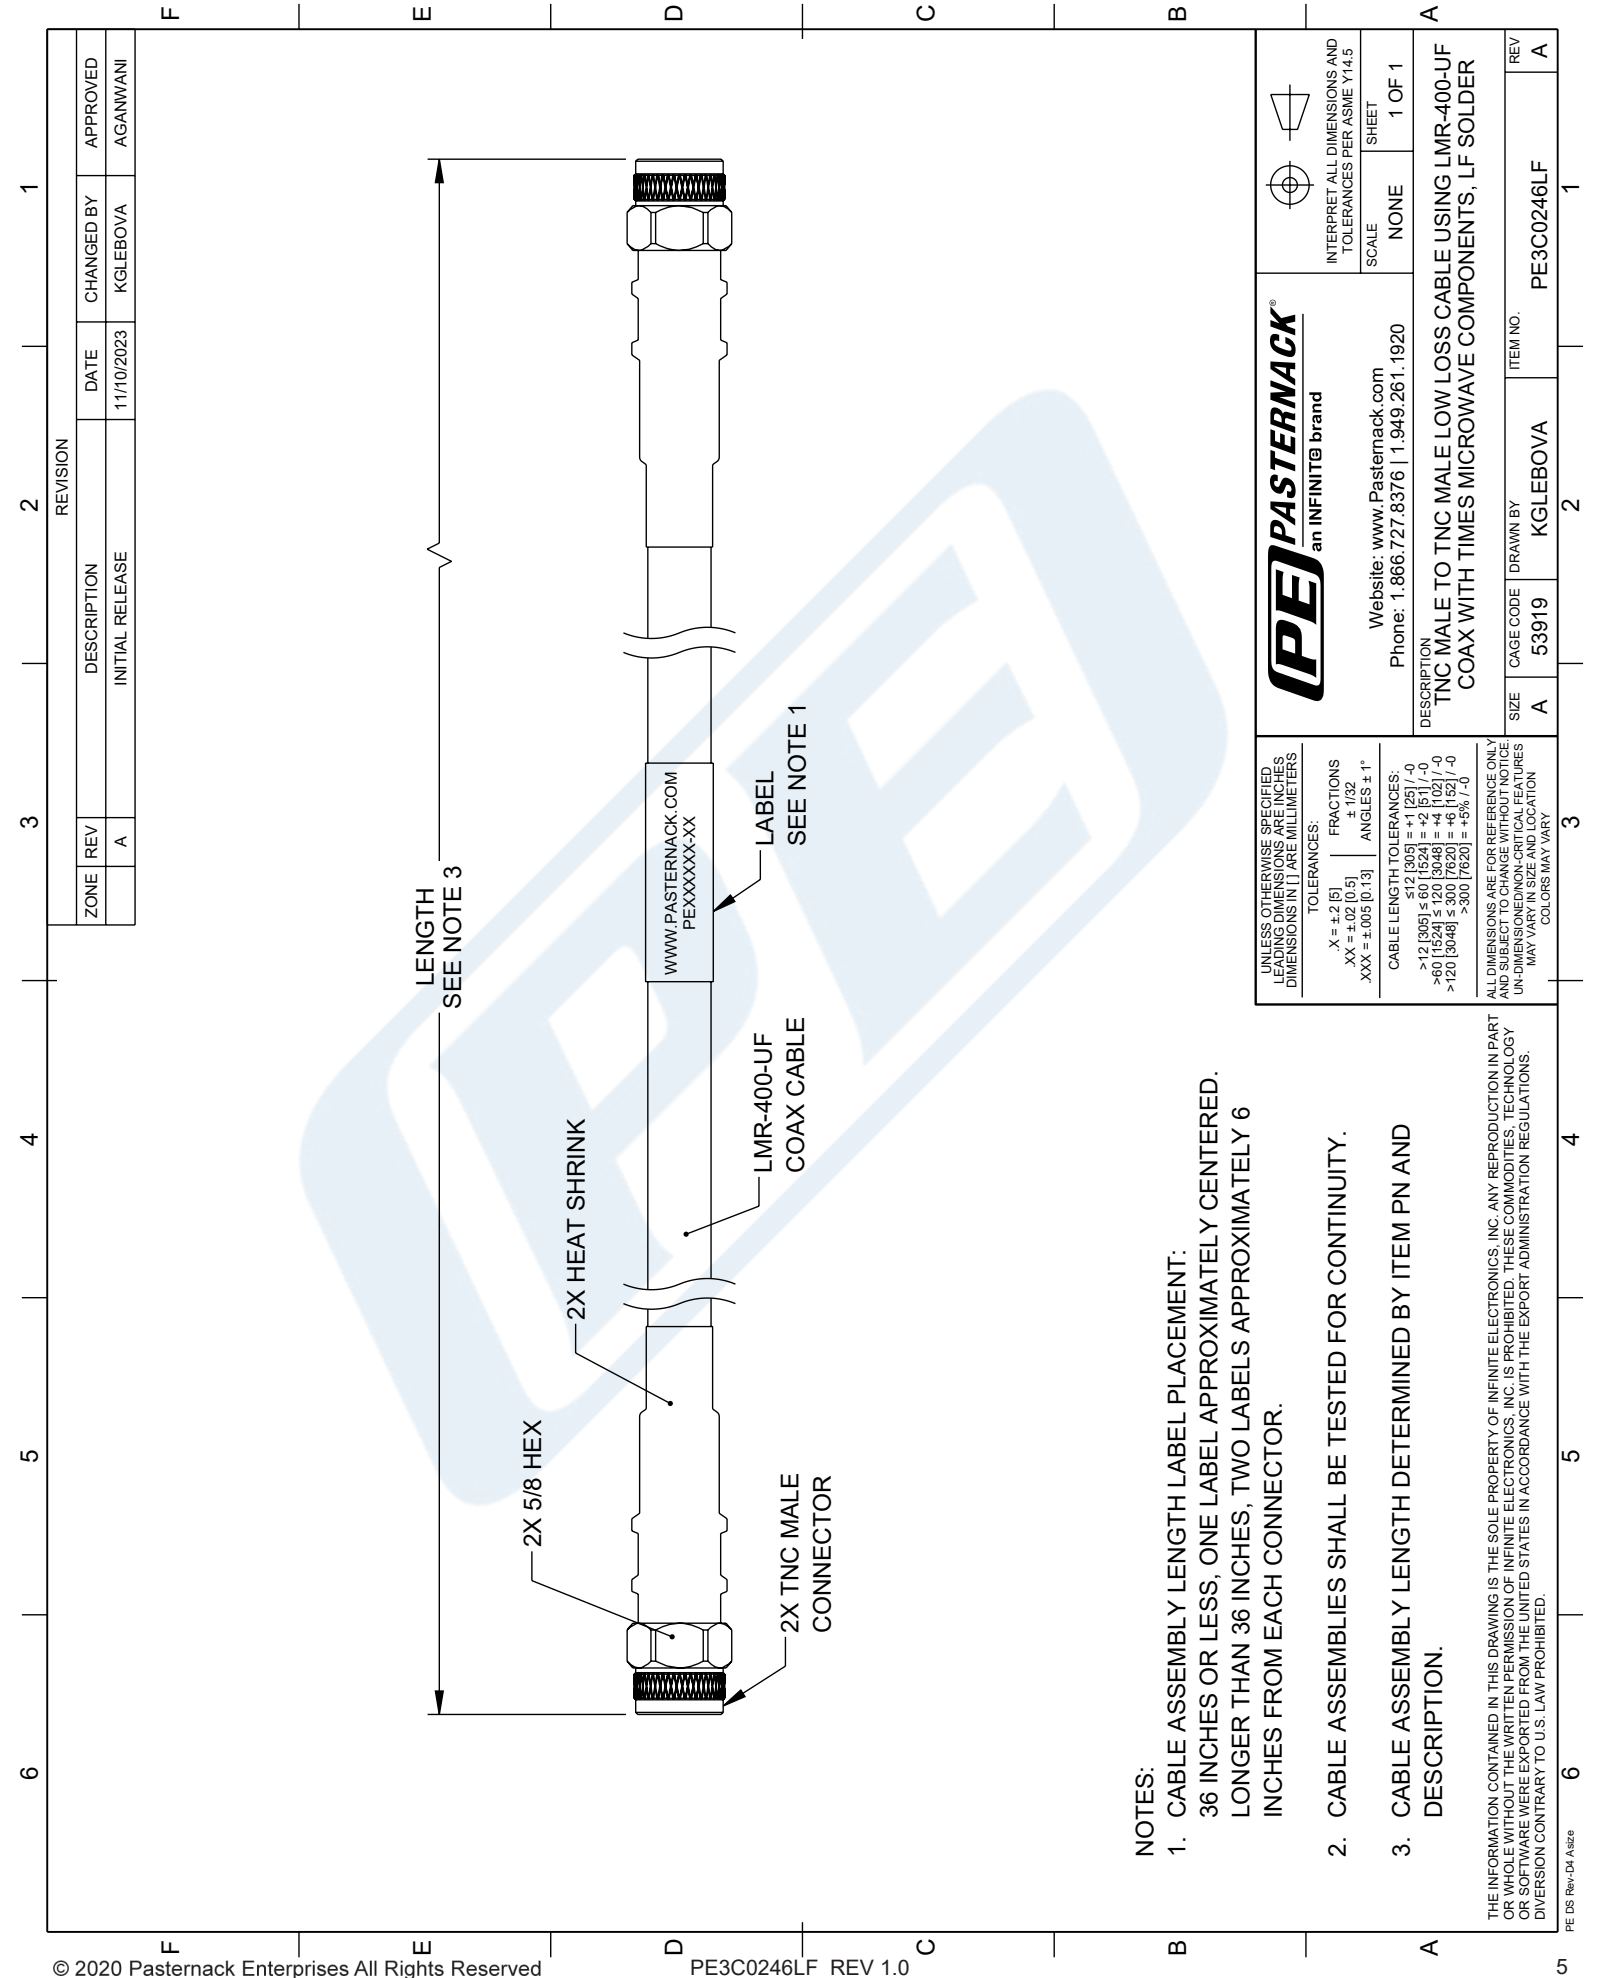

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	11/10/2023	KGLEBOVA	AGANWANI

 PASTERNAK an INFINITI® brand		Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
UNLESS OTHERWISE SPECIFIED, LEADER DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.		TOLERANCES: X = ±.2 [5] XX = ±.02 [0.5] XXX = ±.005 [0.13]		FRACTIONS ± 1/32 ANGLES ± 1°	
CABLE LENGTH TOLERANCES: >12 [305] ≤ 517 [1303] = ±.25 [6.35] / -0 >517 [1303] ≤ 120 [3048] = ±.12 [3.05] / -0 >60 [1524] ≤ 120 [3048] = ±.12 [3.05] / -0 >120 [3048] ≤ 300 [7620] = ±.12 [3.05] / -0 >300 [7620] = ±.12 [3.05] / -0		ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS. UNLESS OTHERWISE SPECIFIED, LEADER DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.		SCALE NONE	
DESCRIPTION TNC MALE TO TNC MALE LOW LOSS CABLE USING LMR-400-UF COAX WITH TIMES MICROWAVE COMPONENTS, LF SOLDER		SHEET 1 OF 1		REV A	
SIZE A		CAGE CODE 53919		ITEM NO. PE3C0246LF	
DRAWN BY KGLEBOVA		1		2	