



## TNC Male Right Angle to N Male Low Loss Cable 50 cm Length Using PE-P142LL Coax, RoHS

### RF Cable Assemblies Technical Data Sheet


**PE3C1041-50CM**

#### Configuration

- Connector 1: TNC Male Right Angle
- Connector 2: N Male
- Cable Type: PE-P142LL

#### Features

- 83% Velocity of Propagation
- Shielding effectiveness > 95 dB
- Maximum VSWR < 1.50:1 to 18 GHz
- Minimum Bend Radius of 1 inch
- Operating Temperature range of -55 to +125°C
- ROHS and REACH Compliant
- Same day shipment of custom lengths
- 100% Continuity, Hi-Pot, and RF tested

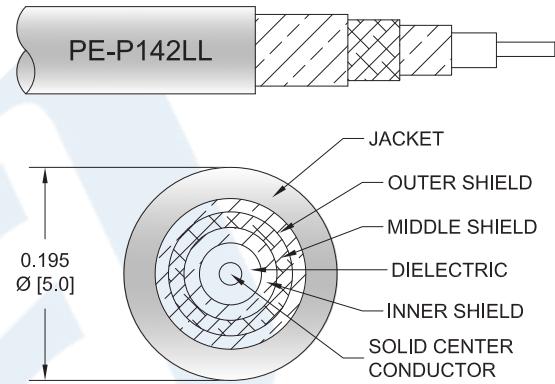

#### Description

The PE3C1041 series high performance test cable's 0.195 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All PE3C1041 cable assemblies are 100% Continuity, Hi-POT, and RF tested to published specifications. Custom lengths are built to order and shipped same day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.5:1	
Return Loss	13.98			dB
Velocity of Propagation		83		%
RF Shielding	95			dB
Capacitance		25 [82.02]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Male Low Loss Cable 50 cm Length Using PE-P142LL Coax, RoHS PE3C1041-50CM](#)


**TNC Male Right Angle to N Male Low Loss Cable  
 50 cm Length Using PE-P142LL Coax, RoHS**
**RF Cable Assemblies Technical Data Sheet**
**PE3C1041-50CM**
**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.58	0.64	0.74	0.88	1.06	dB
Insertion Loss (Typ.)	0.53	0.58	0.67	0.78	0.94	dB

**Mechanical Specifications**
**Cable Assembly**

Length	19.69 in [500.13 mm]
Diameter	0.875 in [22.23 mm]
Weight	0.24 lbs [108.86 g]

**Cable**

Cable Type	PE-P142LL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	3
Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Aluminum Polyester
Shield Layer 3	Silver Plated Copper Wire
Jacket Material	FEP, Green
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Male Low Loss Cable 50 cm Length Using PE-P142LL Coax, RoHS PE3C1041-50CM](#)



## TNC Male Right Angle to N Male Low Loss Cable 50 cm Length Using PE-P142LL Coax, RoHS

### RF Cable Assemblies Technical Data Sheet

**PE3C1041-50CM**

#### Connectors

Description	Connector 1	Connector 2
Type	TNC Male Right Angle	N Male
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	ASTM-B488, 50 $\mu$ in. minimum	ASTM-B488, 50 $\mu$ in. minimum
Dielectric Type	PTFE	PTFE
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2701	SAE-AMS-2700
Hex Size	9/16 Inch	3/4 Inch
Torque	12 in-lbs [1.36 Nm]	12 in-lbs [1.36 Nm]
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2701	

#### Environmental Specifications

##### Temperature

Operating Range

-55 to +125 deg C

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

Yes

REACH Compliant

12/17/2015

#### Plotted and Other Data

##### Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Male Low Loss Cable 50 cm Length Using PE-P142LL Coax, RoHS PE3C1041-50CM](#)



## TNC Male Right Angle to N Male Low Loss Cable 50 cm Length Using PE-P142LL Coax, RoHS

### RF Cable Assemblies Technical Data Sheet

PE3C1041-50CM

#### How to Order

Part Number Configuration:

**PE3C1041**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C1041-12 = 12 inches long cable  
PE3C1041-100cm = 100 cm long cable

TNC Male Right Angle to N Male Low Loss Cable 50 cm Length Using PE-P142LL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Male Low Loss Cable 50 cm Length Using PE-P142LL Coax, RoHS PE3C1041-50CM](#)


URL: <https://www.pasternack.com/tnc-male-n-male-pe-p142ll-cable-assembly-pe3c1041-50cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C1041-50CM CAD Drawing

TNC Male Right Angle to N Male Low Loss Cable 50 cm

Length Using PE-P142LL Coax, RoHS

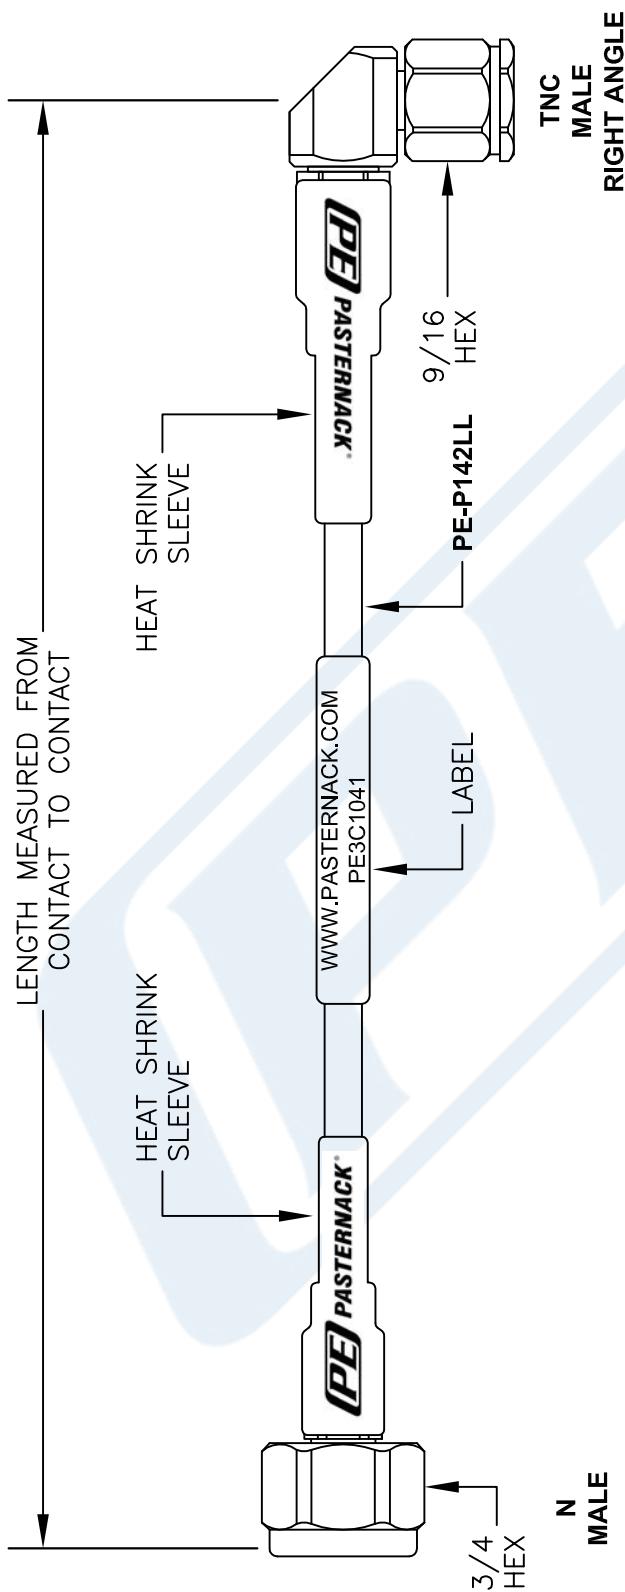

NOTE:  
LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED. 48" OR LONGER WILL BE 12" AWAY FROM CONNECTOR.

How To Order		Part #	Ext.	Length In Inches	Part #	Ext.	Length In Centimeters
Part Number Configuration	Examples	-12		12"	-25CM		25Cm
PE3zzzz	yy - xx uu	24		24"	50CM		50Cm
		-36		36"	-75CM		75Cm
		-48		48"	-100CM		100Cm
		-60		60"	-125CM		125Cm
		>xx		Custom Length	-xxCM		Custom Length

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES (mm).  
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR 3/8", WHICHEVER IS GREATER.

**PE3C1041**

**PASTERNACK**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE	PE3C1041	CAD FILE	100914	SCALE	N/A	SIZE	A
FSCM NO.	53919						150