



N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet


PE3C2912LF

Configuration

- Connector 1: N Male
- Connector 2: SMA Male
- Cable Type: PE-SR405FL

Features

- Max Frequency 11 GHz
- 69.5% Phase Velocity

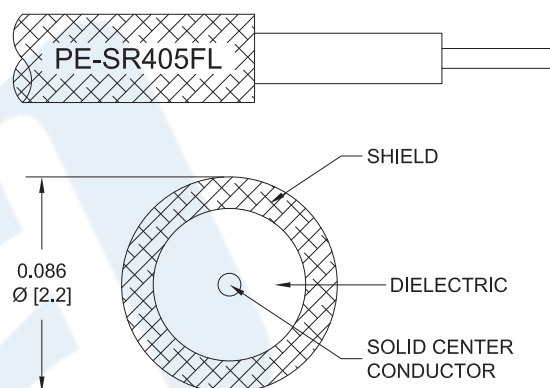

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C2912LF type N male to SMA male cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack type N to SMA cable assembly has a male to male gender configuration with 50 ohm formable PE-SR405FL coax. The PE3C2912LF type N male to SMA male cable assembly operates to 11 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder PE3C2912LF](#)



N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C2912LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ω/1000ft [Ω/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	11	GHz
Insertion Loss (Typ.)	0.15	0.225	0.346	0.549	0.85	dB/ft
	0.49	0.74	1.14	1.8	2.79	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector.

Mechanical Specifications

Cable Assembly

Weight 0.08 lbs [36.29 g]

Cable

Cable Type PE-SR405FL
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Outer Conductor Material and Plating Copper, Tin
 Repeated Minimum Bend Radius 0.78 in [19.81 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder PE3C2912LF](#)



N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C2912LF

Connectors

Description	Connector 1	Connector 2
Type	N Male	SMA Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold over Nickel	Brass, Gold over Nickel
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Gold over Nickel
Coupling Nut Material and Plating	Brass, Nickel	Passivated Stainless Steel
Hex Size		5/16 inch
Torque		8 in-lbs [0.9 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder PE3C2912LF](#)



N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C2912LF

How to Order

Part Number Configuration:

PE3C2912LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C2912LF-12 = 12 inches long cable
PE3C2912LF-100cm = 100 cm long cable

N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder PE3C2912LF](#)

URL: <https://www.pasternack.com/n-male-to-sma-male-cable-using-pe-sr405fl-lf-solder-pe3c2912lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2912LF CAD Drawing
N Male to SMA Male Cable Using PE-SR405FL Coax , LF Solder

