

SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR405FL Coax





PE3C4262

Configuration

- Connector 1: SMA Female 4 Hole Flange
- Connector 2: SMA Female 4 Hole Flange
- Cable Type: PE-SR405FL
- Coax Flex Type: Formable

Features

- Max Frequency 18 GHz
- 69.5% Phase Velocity

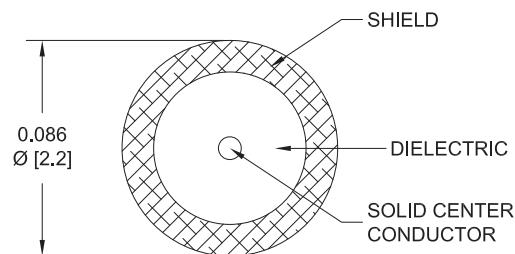

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C4262 SMA female 4 hole flange to SMA female 4 hole flange cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a female to female gender configuration with 50 ohm formable PE-SR405FL coax. The PE3C4262 SMA female to SMA female cable assembly operates to 18 GHz. Our RF cable assembly with SMA 4 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ohms/1000ft [Ohms/Km]

Specifications by Frequency

SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR405FL Coax



PE3C4262

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	1000	2000	4500	9000	18000		
PE3C4262	Custom Lengths Available	Insertion Loss (Typ.)	0.23	0.31	0.508	0.759	1.122	dB/ft	
			0.74	1.01	1.67	2.5	3.69	dB/m	
PE3C4262-6	6 inch	Insertion Loss (Typ.)	0.32	0.36	0.46	0.58	0.77	dB	0.02
PE3C4262-9	9 inch	Insertion Loss (Typ.)	0.37	0.43	0.59	0.77	1.05	dB	0.023
PE3C4262-12	12 inch	Insertion Loss (Typ.)	0.43	0.51	0.71	0.96	1.33	dB	0.025
PE3C4262-24	24 inch	Insertion Loss (Typ.)	0.65	0.82	1.22	1.72	2.45	dB	0.037
PE3C4262-36	36 inch	Insertion Loss (Typ.)	0.88	1.12	1.73	2.48	3.57	dB	0.048

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.1 dB

Base Weight: 0.025 pounds

Additional Weight per Inch: 0.00092 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.025 lbs [11.34 g]

Cable

Cable Type	PE-SR405FL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor 1 Material and Plating	Copper, Tin
Repeated Minimum Bend Radius	0.78 in [19.81 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Female 4 Hole Flange	SMA Female 4 Hole Flange
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold

SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR405FL Coax



PE3C4262

Environmental Specifications

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:

Typical Performance Data

How to Order

Part Number Configuration:

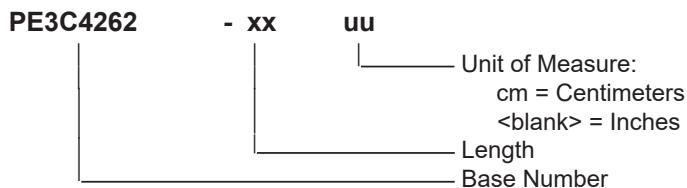

Example: PE3C4262-12 = 12 inches long cable
PE3C4262-100cm = 100 cm long cable

SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR405FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR405FL Coax PE3C4262](#)

URL: <https://www.pasternack.com/sma-female-4-hole-flange-to-sma-female-4-hole-flange-cable-using-pe-sr405fl-pe3c4262-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C4262 CAD Drawing

SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR405FL Coax

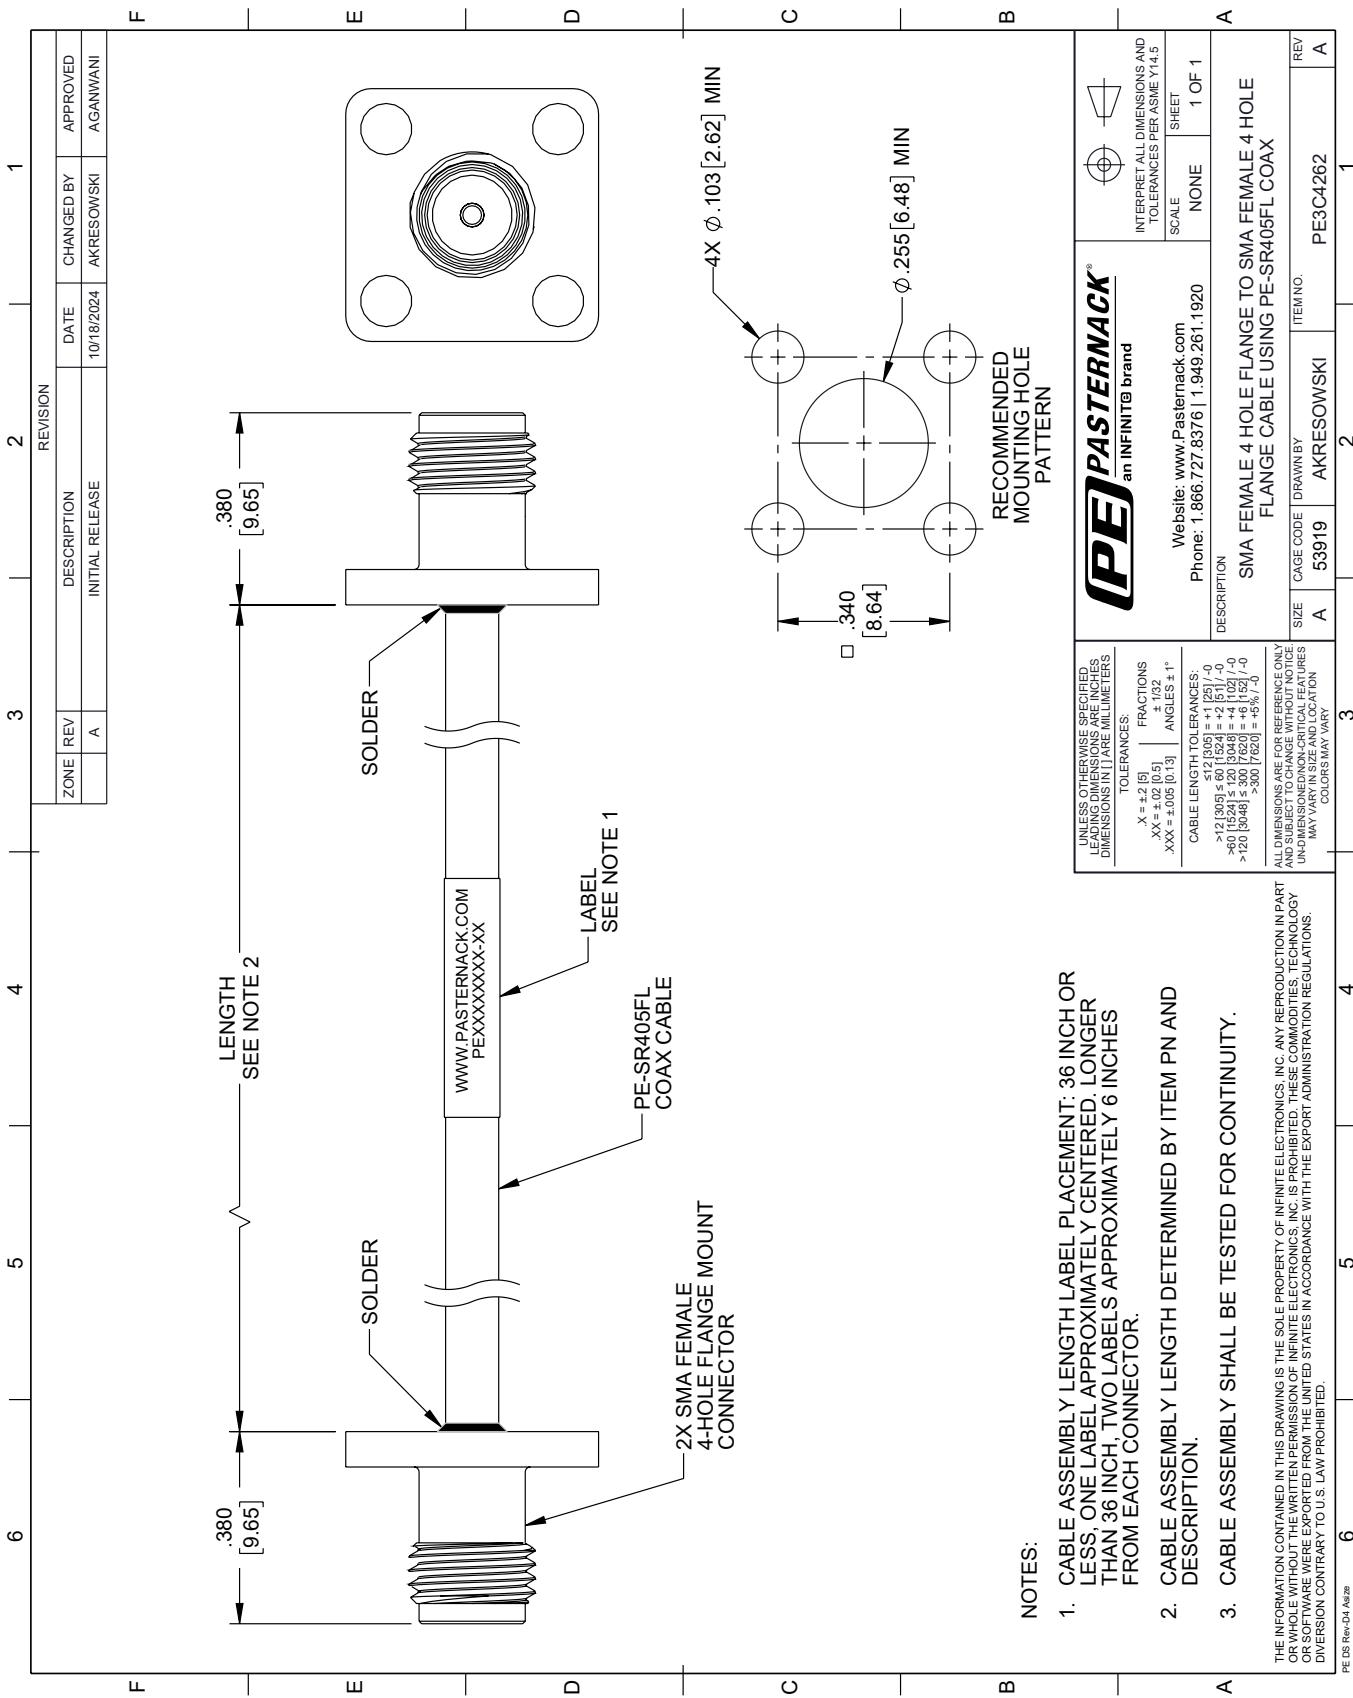

 an INFINITE® brand	DESCRIPTION	 SMA FEMALE 4 HOLE FLANGE TO SMA FEMALE 4 HOLE FLANGE CABLE USING PE-SR405FL COAX	
		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE	1 OF 1
	SIZE	CAGE CODE	ITEM NO.
A	53919	AKRESOWSKI	PE3C4262