




SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax

RF Cable Assemblies Technical Data Sheet

PE3C4969-60


Configuration

- Connector 1: SMP Female Right Angle
- Connector 2: SMP Female Right Angle
- Cable Type: PE-P047



Features

- Max Frequency 18 GHz
- Shielding Effectivity > 90 dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

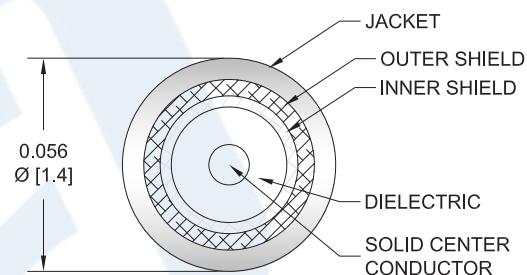

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C4969-60 SMP female right angle to SMP female right angle 60 inch cable using PE-P047 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMP to SMP cable assembly has a female to female gender configuration with 50 ohm flexible PE-P047 coax. The PE3C4969-60 SMP female to SMP female cable assembly operates to 18 GHz. The right angle SMP interfaces on the PE-P047 cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.45:1	
Velocity of Propagation		70		%
RF Shielding	90			dB
Capacitance		29 [95.14]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax PE3C4969-60](#)



SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax

RF Cable Assemblies Technical Data Sheet

PE3C4969-60

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	1.45	1.92	2.75	3.9	5.6	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.4dB of connector loss.

Mechanical Specifications

Cable Assembly

Length*
Diameter

60 in [152.4 cm]
0.136 in [3.45 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Shield Layer 2
Jacket Material
Jacket Diameter

PE-P047
50 Ohms
Solid
Copper, Silver
FEP
2
Silver Plated Copper Tape
Silver Plated Copper Braid
FEP, Blue
0.056 in [1.42 mm]

One Time Minimum Bend Radius
Repeated Minimum Bend Radius

0.2 in [5.08 mm]
0.4 in [10.16 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax PE3C4969-60](#)



SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax

RF Cable Assemblies Technical Data Sheet

PE3C4969-60

Connectors

Description	Connector 1	Connector 2
Type	SMP Female Right Angle	SMP Female Right Angle
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	MIL-G-45204	MIL-G-45204
Dielectric Type	PTFE	PTFE
Body Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Body Plating Specification	MIL-G-45204	MIL-G-45204

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax PE3C4969-60](#)




SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax

RF Cable Assemblies Technical Data Sheet

PE3C4969-60

Typical Performance Data

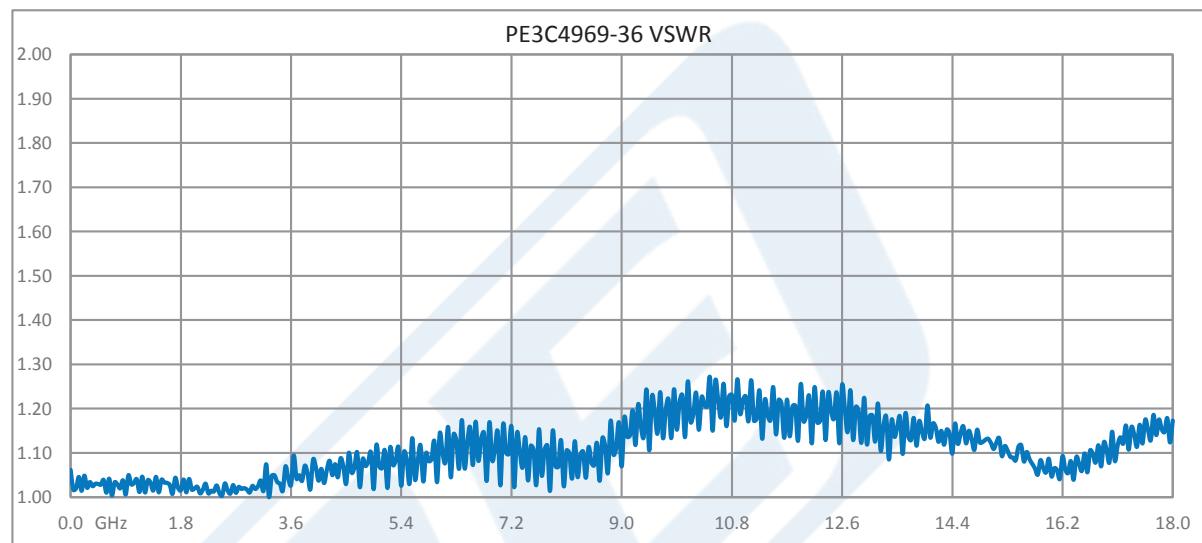

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax PE3C4969-60](#)



SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax

RF Cable Assemblies Technical Data Sheet

PE3C4969-60

How to Order

Part Number Configuration:

PE3C4969

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C4969-12 = 12 inches long cable
PE3C4969-100cm = 100 cm long cable


SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to SMP Female Right Angle Cable 60 Inch Length Using PE-P047 Coax PE3C4969-60](#)

URL: <https://www.pasternack.com/smp-female-smp-female-pe-p047-cable-assembly-pe3c4969-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C4969-60 CAD Drawing
 SMP Female Right Angle to SMP Female Right Angle
 Cable 60 Inch Length Using PE-P047 Coax

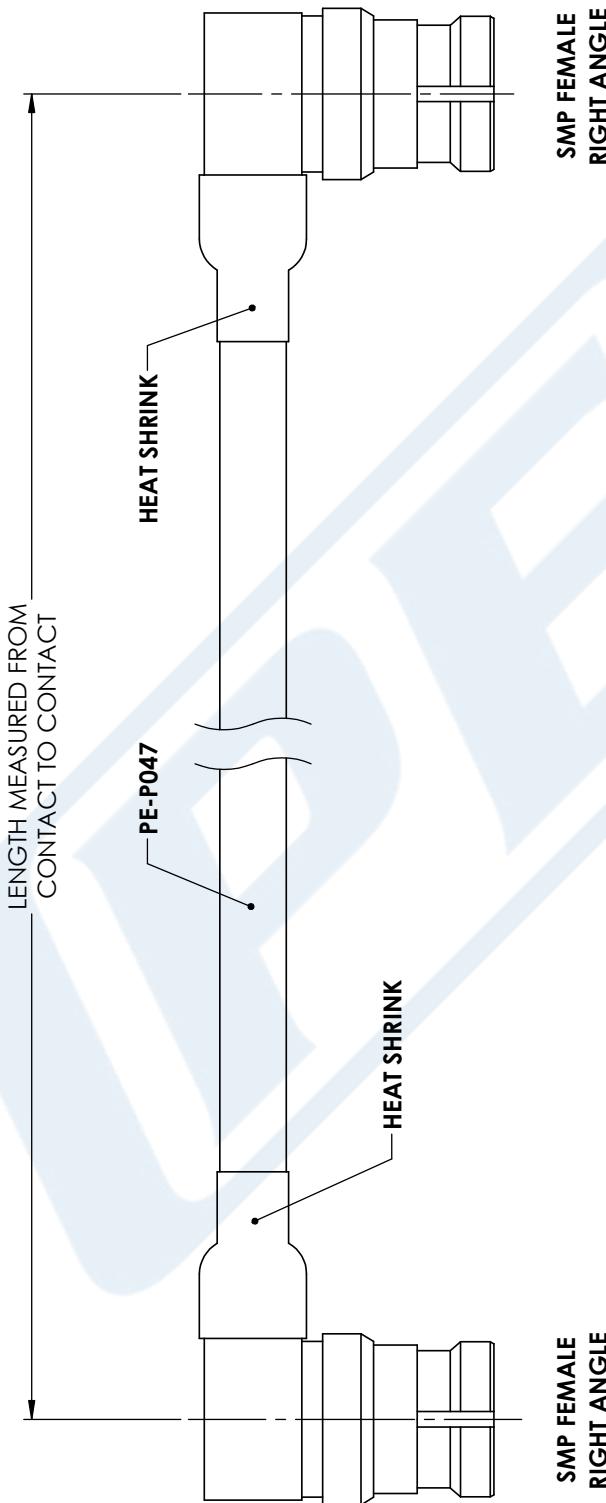

**SMP FEMALE
RIGHT ANGLE**

**SMP FEMALE
RIGHT ANGLE**

STANDARD TOLERANCES		
X	±0.2	
.XX	±0.01	
.XXX	±0.005	

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

PE PASTERNACK®
 THE ENGINEER'S RESOURCE

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

SIZE A	SCALE N/A	SIZE A	CN2245