

SMA Male to Straight Cut Lead Low Loss Cable Using LMR-195 Coax with Times Microwave Components




PE3C5831

Configuration

- Connector 1: SMA Male
- Connector 2: Straight Cut Lead
- Cable Type: LMR-195
- Coax Flex Type: Flexible

Features

- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Double Shielded
- PE Jacket

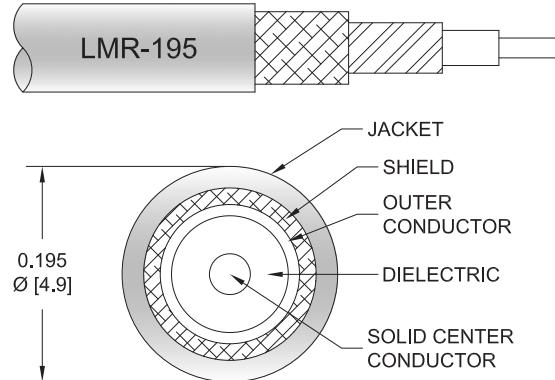

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C5831 50 ohm SMA male to straight cut lead cable using LMR-195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		80		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.6 [24.93]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ohms/1000ft [Ohms/Km]
Jacket Spark			3,000	Vrms

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.041 lbs [18.6 g]

SMA Male to Straight Cut Lead Low Loss Cable Using LMR-195 Coax with Times Microwave Components



PE3C5831

Cable

Cable Type	LMR-195
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	Straight Cut Lead
Impedance	50 Ohms	0 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	ASTM B488	
Dielectric Type	Teflon	
Body Material and Plating	Passivated Stainless Steel	
Coupling Nut Material and Plating	Passivated Stainless Steel	
Hex Size	5/16 Inch	

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Male to Straight Cut Lead Low Loss Cable Using LMR-195 Coax with Times Microwave Components




PE3C5831

Typical Performance Data

How to Order

Part Number Configuration:

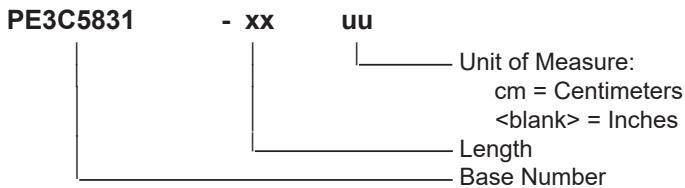

Example: PE3C5831-12 = 12 inches long cable
PE3C5831-100cm = 100 cm long cable

SMA Male to Straight Cut Lead Low Loss Cable Using LMR-195 Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to Straight Cut Lead Low Loss Cable Using LMR-195 Coax with Times Microwave Components PE3C5831](#)

URL: <https://www.pasternack.com/sma-male-to-straight-cut-lead-low-loss-cable-using-lmr-195-pe3c5831-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C5831 CAD Drawing

SMA Male to Straight Cut Lead Low Loss Cable Using LMR-195 Coax with Times Microwave Components

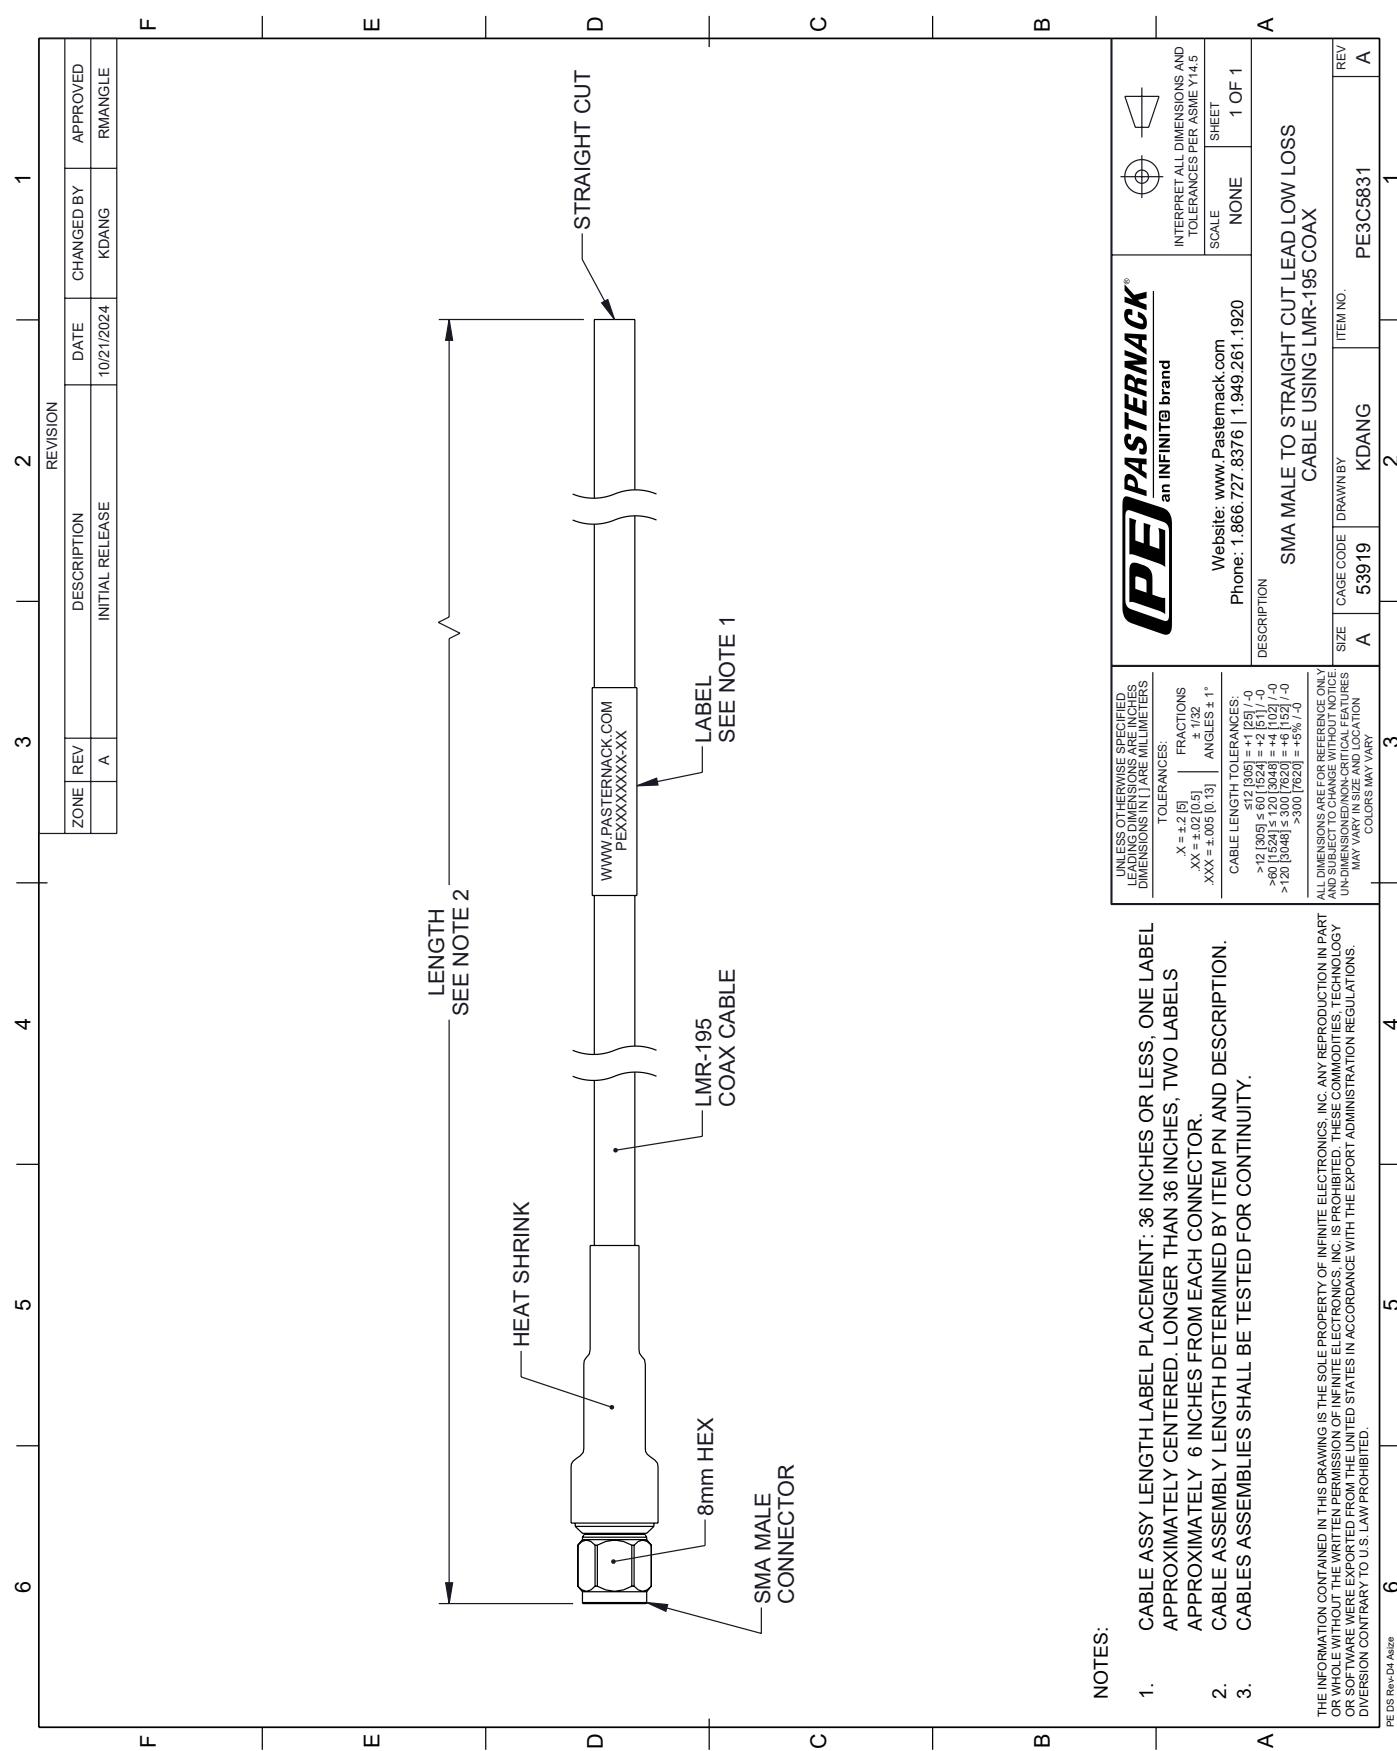

PASTERNACK® an INFINITE® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
WEBSITE: www.Pasternack.com	PHONE: 1.866.727.8326 1.949.261.1920	
DESCRIPTION: CABLE TO STRAIGHT CUT LEAD LOW LOSS CABLE USING LMR-195 COAX	SCALE: NONE	SHOOT SHEET: 1 OF 1
SIZE: A	CAGE CODE: 53919	DRAWN BY: KDANG
ITEM NO.: PE3C5831	REV: A	1

UNLESS OTHERWISE SPECIFIED,
LEADING DIMENSIONS ARE IN INCHES.
DIMENSIONS IN PARENTHESES ARE MILLIMETERS.

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.

UNDIMENSIONED NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION.

COLORS MAY VARY.