

7/16 DIN Male Right Angle to N Male Right Angle
Low PIM Cable 50 CM Length Using TFT-5G-402 Coax
Using Times Microwave Components



PE3C8328-50CM

Configuration

- Connector 1: 7/16 DIN Male Right Angle
- Connector 2: N Male Right Angle
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket



Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

Description

Pasternack's PE3C8328-50CM 7/16 DIN male right angle to type N male right angle 50 cm cable using TFT-5G-402 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 7/16 DIN to type N cable assembly has a male to male gender configuration with 50 ohm flexible TFT-5G-402 coax. The PE3C8328-50CM 7/16 DIN male to type N male cable assembly operates to 5.8 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The right angle 7/16 DIN and right angle type N interfaces on the TFT-5G-402 cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|--|---------|---------|---------|-------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 76 | | % |
| RF Shielding | 80 | | | dB |
| Passive Intermodulation | | | -160 | dBc |
| IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz | | | | |

7/16 DIN Male Right Angle to N Male Right Angle
Low PIM Cable 50 CM Length Using TFT-5G-402 Coax
Using Times Microwave Components



PE3C8328-50CM

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------|---------|-------------|---------|--------------|
| Capacitance | | 26.7 [87.6] | | pF/ft [pF/m] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Typ.) | 0.32 | 0.36 | 0.42 | 0.54 | 0.71 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.12 dB for the 7/16 DIN connector and 0.1 dB for the N connector.

Mechanical Specifications

Cable Assembly

Width/Diameter 1.25 in [31.75 mm]

Cable

Cable Type TFT-5G-402
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper
 Dielectric Type PTFE
 Number of Shields 2
 Jacket Material FEP, Blue
 Jacket Diameter 0.16 in [4.06 mm]
 One Time Minimum Bend Radius 0.75 in [19.05 mm]

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|---------------------------|--------------------|
| Type | 7/16 DIN Male Right Angle | N Male Right Angle |
| Impedance | 50 Ohms | 50 Ohms |
| Configuration | Right Angle | Right Angle |
| Contact Material and Plating | Brass, Silver | Brass, Silver |
| Contact Plating Specification | 200 µin | 5 µm |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Body Plating Specification | 100 µin | 3 µm |
| Coupling Nut Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Coupling Nut Plating Specification | 100 µin | 3 µm |
| Torque | 22.083 ft-lbs 29.95 Nm | 10 in-lbs 1.13 Nm |

7/16 DIN Male Right Angle to N Male Right Angle
Low PIM Cable 50 CM Length Using TFT-5G-402 Coax
Using Times Microwave Components



PE3C8328-50CM

Environmental Specifications

Operating Range Temperature -55 to +150 deg C

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

Typical Performance Data

How to Order

Part Number Configuration:

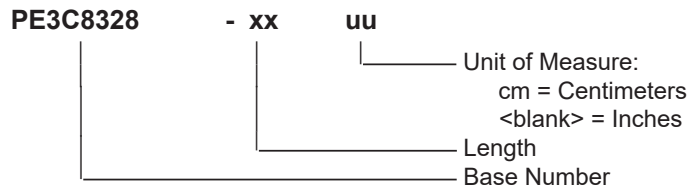

Example: PE3C8328-12 = 12 inches long cable
PE3C8328-100cm = 100 cm long cable

7/16 DIN Male Right Angle to N Male Right Angle Low PIM Cable 50 CM Length Using TFT-5G-402 Coax Using Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Right Angle to N Male Right Angle Low PIM Cable 50 CM Length Using TFT-5G-402 Coax Using Times Microwave Components PE3C8328-50CM](#)

URL: <https://www.pasternack.com/7-16-din-male-right-angle-to-n-male-low-pim-cable-50-cm-length-using-tft-5g-402-pe3c8328-50cm.html>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C8328-50CM CAD Drawing

7/16 DIN Male Right Angle to N Male Right Angle Low PIM Cable 50 CM Length
Using TFT-5G-402 Coax Using Times Microwave Components

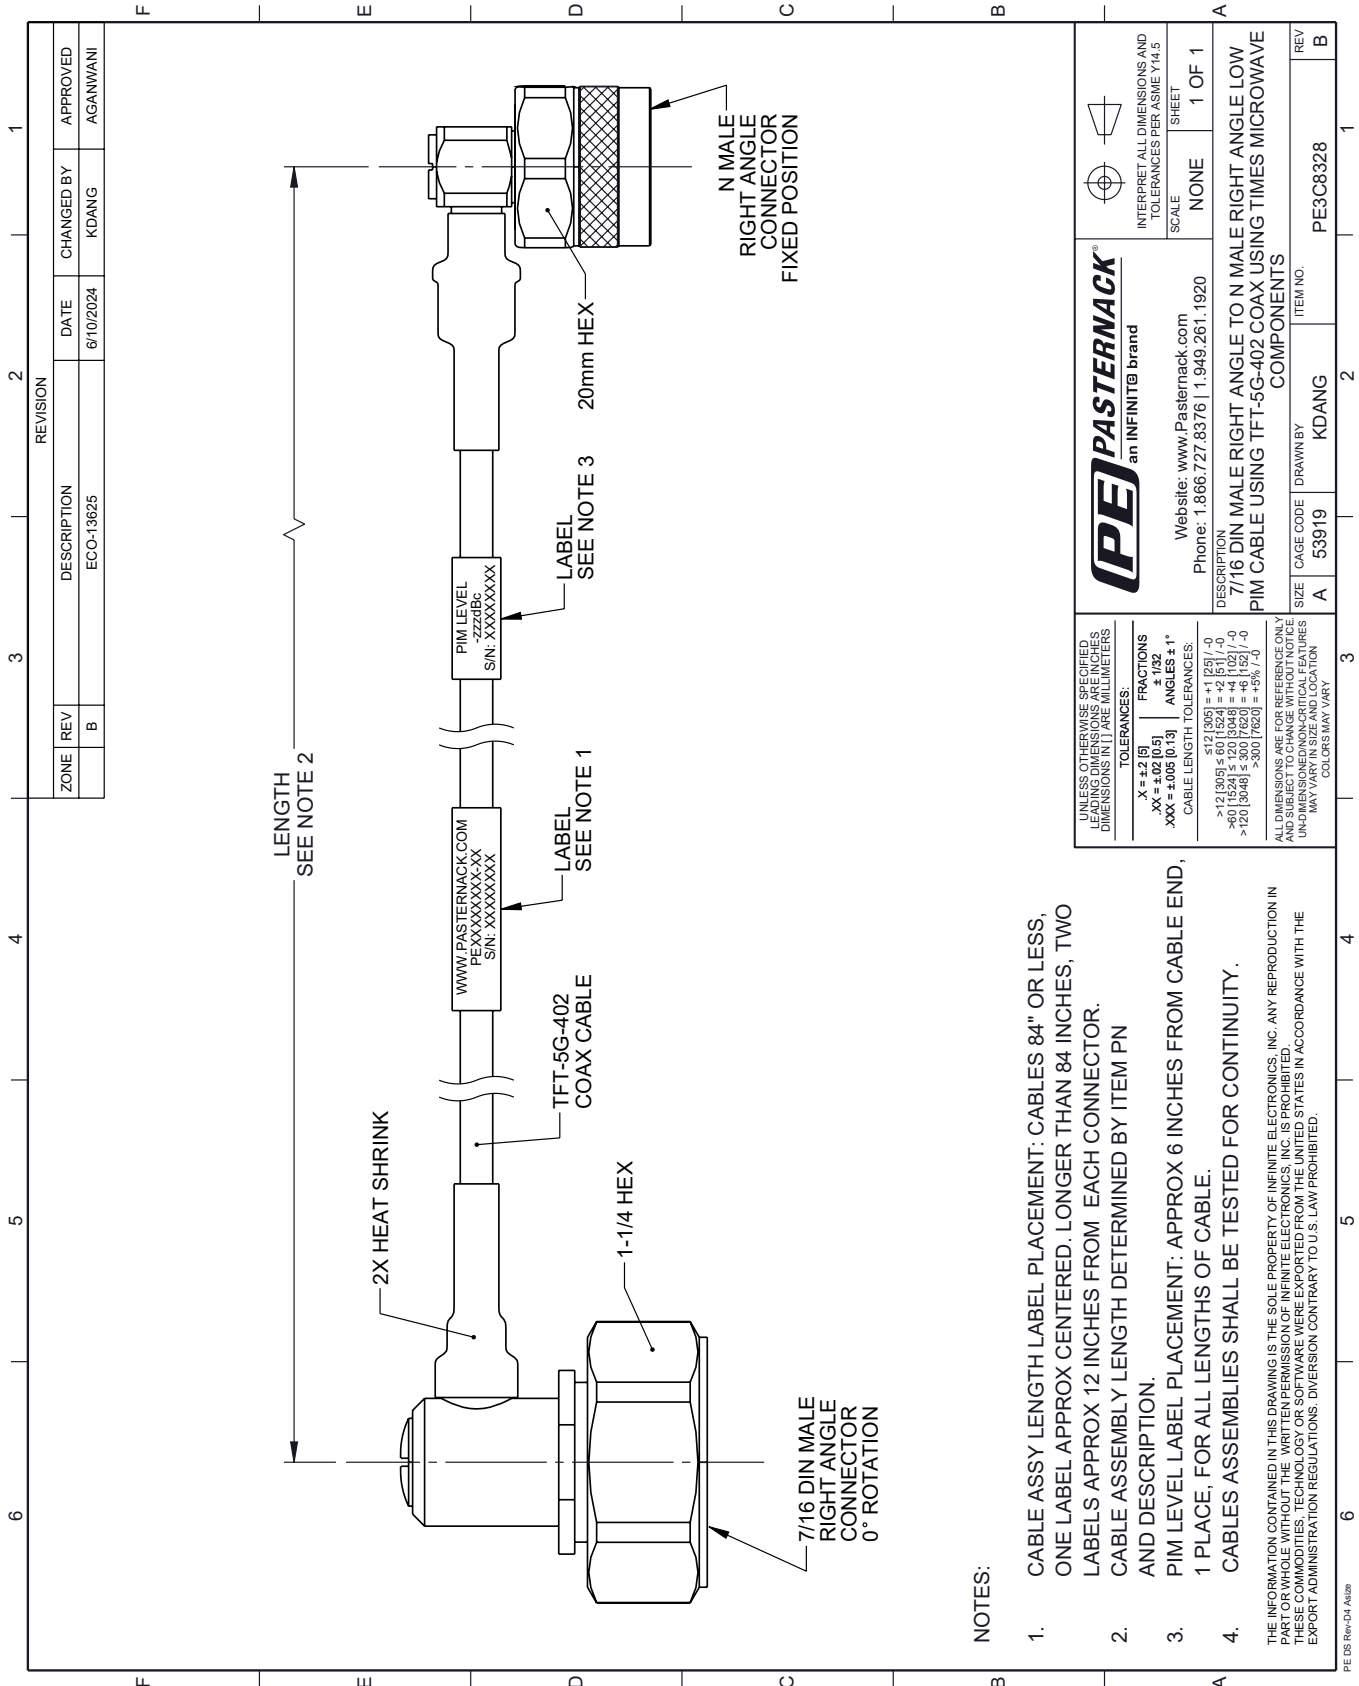

| REVISION | | DATE | CHANGED BY | APPROVED |
|-------------|-----|------------|------------|----------|
| ZONE | REV | | | |
| | B | 01/10/2024 | KDANG | AGANWANI |
| DESCRIPTION | | | | |
| ECO-13625 | | | | |

| ZONE | REV | DATE | CHANGED BY | APPROVED |
|-------------|-----|------------|------------|----------|
| | B | 01/10/2024 | KDANG | AGANWANI |
| DESCRIPTION | | | | |
| ECO-13625 | | | | |

NOTES:

- CABLE ASSY LENGTH LABEL PLACEMENT: CABLES 84" OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 84 INCHES, TWO LABELS APPROX 12 INCHES FROM EACH CONNECTOR.
- CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
- PIM LEVEL LABEL PLACEMENT: APPROX 6 INCHES FROM CABLE END, 1 PLACE, FOR ALL LENGTHS OF CABLE.
- CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

| | | | | | | | |
|--|--|------------------|------------------|-------------|---------------------|--------------------------|--|
| <p>PASTERNAK an INFINITB brand</p> <p>Website: www.Pasterneck.com Phone: 1.866.727.8376 1.949.261.1920</p> | <p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p> | | | | | | |
| | <p>DESCRIPTION: 7/16 DIN MALE RIGHT ANGLE TO N MALE RIGHT ANGLE LOW PIM CABLE USING TFT-5G-402 COAX USING TIMES MICROWAVE COMPONENTS</p> <p>SIZE: A</p> <p>CAGE CODE: 53919</p> <p>DRAWN BY: KDANG</p> <p>ITEM NO.: PE3C8328</p> | | | | | | |
| <p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table border="0"> <tr> <td>.X = ±.2 [5]</td> <td>FRACTIONS ± 1/32</td> </tr> <tr> <td>.XX = ±.02 [0.5]</td> <td>ANGLES ± 1°</td> </tr> <tr> <td>.XXX = ±.005 [0.13]</td> <td>CABLE LENGTH TOLERANCES:</td> </tr> </table> <p><12 [305] ±.60 [1524] = +1 [25] / -0</p> <p>>12 [305] ±.60 [1524] = +2 [51] / -0</p> <p>>40 [1024] ±.120 [3048] = +4 [102] / -0</p> <p>>120 [3048] ±.300 [7620] = +5% / -0</p> | .X = ±.2 [5] | FRACTIONS ± 1/32 | .XX = ±.02 [0.5] | ANGLES ± 1° | .XXX = ±.005 [0.13] | CABLE LENGTH TOLERANCES: | <p>ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED</p> <p>UNDESIGNED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION</p> <p>COLORS MAY VARY</p> |
| .X = ±.2 [5] | FRACTIONS ± 1/32 | | | | | | |
| .XX = ±.02 [0.5] | ANGLES ± 1° | | | | | | |
| .XXX = ±.005 [0.13] | CABLE LENGTH TOLERANCES: | | | | | | |