



Black FAKRA Jack Right Angle to SMA
Male Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet


PE3C8984

Configuration

- Connector 1: FAKRA Jack Right Angle
- Connector 2: SMA Male
- Cable Type: RG174

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

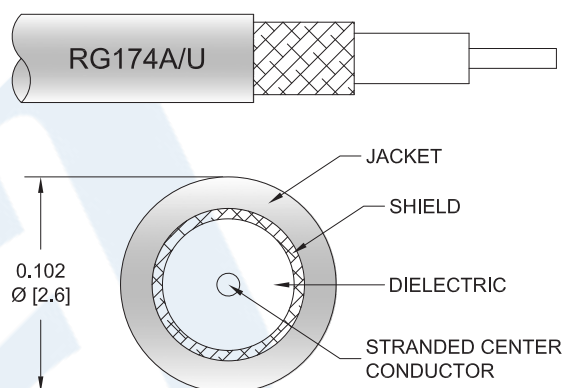

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C8984 black FAKRA jack right angle to SMA male cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack FAKRA to SMA cable assembly has a jack to male gender configuration with 50 ohm flexible RG174 coax. The PE3C8984 FAKRA jack to SMA male cable assembly operates to 1 GHz. The right angle FAKRA interface on the RG174 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Black FAKRA Jack Right Angle to SMA Male Cable Using RG174 Coax PE3C8984](#)



Black FAKRA Jack Right Angle to SMA
Male Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C8984

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.08 [101.97]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	100	250	500	1,000		MHz
Insertion Loss (Typ.)	0.084	0.137	0.211	0.32		dB/ft
	0.28	0.45	0.69	1.05		dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the SMA male connector and 0.2 dB for the FAKRA jack connector.

Mechanical Specifications

Cable Assembly

Weight 0.035 lbs [15.88 g]

Cable

Cable Type RG174
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel
Dielectric Type PE
Number of Shields 1
Shield Layer 1 Tinned Copper Braid
Jacket Material PVC, Black
Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Black FAKRA Jack Right Angle to SMA Male Cable Using RG174 Coax PE3C8984](#)



Black FAKRA Jack Right Angle to SMA
Male Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C8984

Connectors

Description	Connector 1	Connector 2
Type	FAKRA Jack Right Angle	SMA Male
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Phosphor Bronze, Gold	Brass, Gold
Contact Plating Specification		30 µin minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Nickel	
Body Material and Plating	Plastic	Brass, Nickel
Body Plating Specification		100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum
Hex Size		5/16 inch
Torque		3 in-lbs [0.34 Nm]

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Black FAKRA Jack Right Angle to SMA Male Cable Using RG174 Coax PE3C8984](#)



Black FAKRA Jack Right Angle to SMA
Male Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C8984

How to Order

Part Number Configuration:

PE3C8984

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C8984-12 = 12 inches long cable
PE3C8984-100cm = 100 cm long cable

Black FAKRA Jack Right Angle to SMA Male Cable Using RG174 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Black FAKRA Jack Right Angle to SMA Male Cable Using RG174 Coax PE3C8984](#)

URL: <https://www.pasternack.com/fakra-jack-right-angle-to-sma-male-cable-using-rg174-pe3c8984-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C8984 CAD Drawing

Black FAKRA Jack Right Angle to SMA Male Cable Using RG174 Coax

