



QD QMA Male to QMA Male Right Angle Low Loss  
Cable 48 Inch Length Using TCOM-240 Coax  
with Times Microwave Components

**RF Cable Assemblies Technical Data Sheet**

**PE3C9826-48**

**Configuration**

- Connector 1: QDQMA Male
- Connector 2: QMA Male Right Angle
- Cable Type: TCOM-240
- Coax Flex Type: Flexible

**Features**

- Max Frequency 6 GHz
- Double Shielded
- PE Jacket
- 500 Mating Cycles

**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3C9826-48 QMA male QD to QMA male right angle 48 inch cable using TCOM-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack QMA to QMA cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-240 coax. The PE3C9826-48 QMA male to QMA male cable assembly operates to 6 GHz. The right angle QMA interface on the TCOM-240 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	6	GHz
Insertion Loss (Typ.)	0.68	0.74	0.83	1.03	1.32	dB

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QD QMA Male to QMA Male Right Angle Low Loss Cable 48 Inch Length Using TCOM-240 Coax with Times Microwave Components PE3C9826-48](#)



QD QMA Male to QMA Male Right Angle Low Loss  
Cable 48 Inch Length Using TCOM-240 Coax  
with Times Microwave Components

**RF Cable Assemblies Technical Data Sheet**

**PE3C9826-48**

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.28 dB for the QMA male connector and 0.25 dB for the QMA male right angle connector

**Mechanical Specifications**

**Cable Assembly**

Length\* 48 in [121.92 cm]  
Weight 0.247 lbs [112.04 g]

**Cable**

Cable Type TCOM-240  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper  
Dielectric Type PE (F)  
Number of Shields 2  
Shield Layer 1 Silver Plated Copper Braid  
Shield Layer 2 Tinned Copper Braid  
Jacket Material PE, Black  
Jacket Diameter 0.24 in [6.1 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	QMA Male Push-On	QMA Male Right Angle Push-On
Impedance	50 Ohms	50 Ohms
Connection Method	QD	
Mating Cycles	500	500
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	50 µin minimum	50 µ inches minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Tri-Metal
Outer Conductor Plating Specification		80 µ inches minimum
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80 µin minimum	80 µ inches minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	
Coupling Nut Plating Specification	80 µin minimum	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QD QMA Male to QMA Male Right Angle Low Loss Cable 48 Inch Length Using TCOM-240 Coax with Times Microwave Components PE3C9826-48](#)



QD QMA Male to QMA Male Right Angle Low Loss Cable 48 Inch Length Using TCOM-240 Coax with Times Microwave Components

**RF Cable Assemblies Technical Data Sheet**

**PE3C9826-48**

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

**How to Order**

Part Number Configuration:

**PE3C9826 - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C9826-12 = 12 inches long cable  
PE3C9826-100cm = 100 cm long cable

QD QMA Male to QMA Male Right Angle Low Loss Cable 48 Inch Length Using TCOM-240 Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QD QMA Male to QMA Male Right Angle Low Loss Cable 48 Inch Length Using TCOM-240 Coax with Times Microwave Components PE3C9826-48](#)

URL: <https://www.pasternack.com/qd-qma-male-to-qma-male-low-loss-cable-48-inch-length-using-tcom-240-pe3c9826-48-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C9826-48 CAD Drawing

QD QMA Male to QMA Male Right Angle Low Loss Cable 48 Inch Length  
Using TCOM-240 Coax with Times Microwave Components

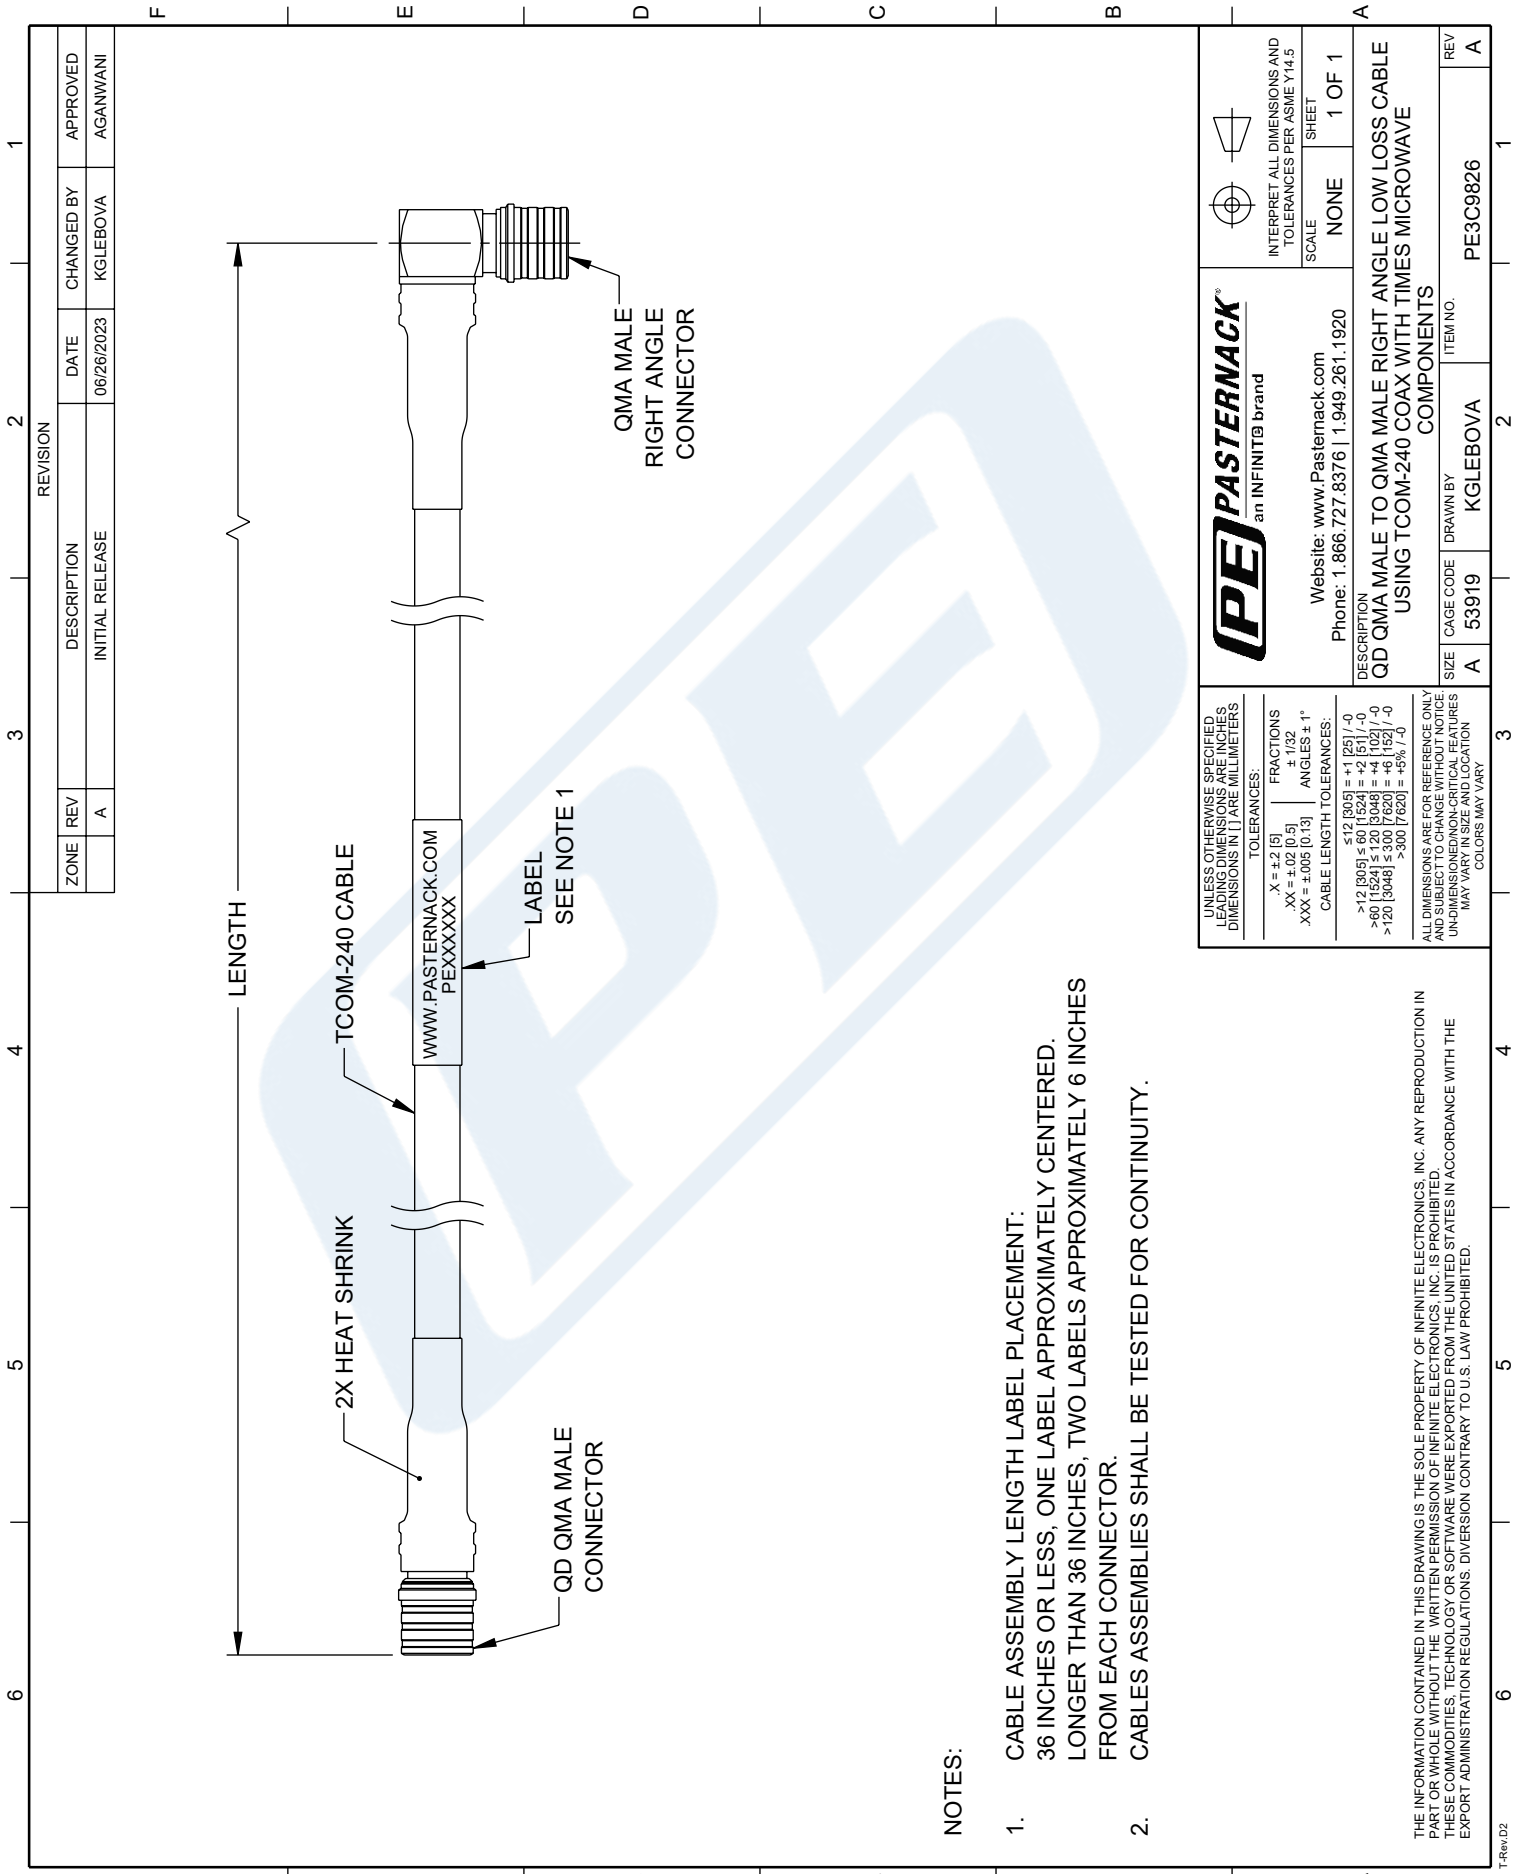

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:  
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.  
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
A		INITIAL RELEASE	06/26/2023	KGLEBOVA	AGANWANI

<p><b>PE PASTERNAK</b> an INFINITI® brand</p> <p>Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a> Phone: 1.866.727.8376   1.949.261.1920</p>	<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p>
	<p>DESCRIPTION: QD QMA MALE TO QMA MALE RIGHT ANGLE LOW LOSS CABLE USING TCOM-240 COAX WITH TIMES MICROWAVE COMPONENTS</p>
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p>TOLERANCES:                  .X = ±.2 [9]                  .XX = ±.02 [0.5]                  .XXX = ±.005 [0.13]                  FRACTIONS ± 1/32                  ANGLES ± 1°</p> <p>CABLE LENGTH TOLERANCES:                  ≤12 [305] = +1 [25] / -0                  &gt;12 [305] ≤ 60 [1524] = +2 [51] / -0                  &gt;60 [1524] ≤ 120 [3048] = +4 [102] / -0                  &gt;120 [3048] ≤ 300 [7620] = +6 [152] / -0                  &gt;300 [7620] = +5% / -0</p> <p>ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.</p>	<p>SIZE: A</p> <p>CAGE CODE: 53919</p> <p>DRAWN BY: KGLEBOVA</p> <p>ITEM NO.: PE3C9826</p>