



## Lead Free 78 Ohm Bend Relief 3-Slot TRB Solder/ Clamp Plug with Blunt Cut for PE-30-02001 36" Cable

### RF Cable Assemblies Technical Data Sheet

**PE3MSA00546-36**

#### Configuration

- Connector 1: TRB Plug
- Connector 2: Blunt Cut
- Cable Type: 30-02001

#### Features

- Max Frequency 400 MHz
- PVC Jacket
- MIL-STD-1553
- -20°C to +75°C
- 78 ohms
- Lab rated
- Lead Free

#### Applications

- General Purpose
- Laboratory Use
- MIL-STD-1553
- Data
- Lab applications

#### Description

Pasternack's PE3MSA00546-36 78 ohm TRB plug to Blunt cut 36 inch cable using 78 ohm PE-30-02001 twinax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. The PE3MSA00546-36 TRB plug to Blunt cut cable assembly operates to 400 MHz. The PE3MSA00546 it's a Lead Free cable assembly consisting of a Bend Relief 3-slot solder/clamp TRB plug with Blunt Cut for PE-30-02001; that offer a lower-cost, lab-rated PVC cabling solution for laboratory implementations for MIL-STD-1553 applications. It features a larger diameter cable (.242" O.D.). These cable assemblies come with a 1.700" steel spring-style bend relief that helps to minimize cable damage when exceeding the cables minimum bend radius. These assemblies are built to withstand severe shocks and vibrations.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		400	MHz
Capacitance		19.7 [64.63]		pF/ft [pF/m]
Operating Voltage (AC)			1,000	Vrms

Insertion Loss (Typ.)

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Lead Free 78 Ohm Bend Relief 3-Slot TRB Solder/Clamp Plug with Blunt Cut for PE-30-02001 Twinax \(.242 O.D.\) 36" Cable PE3MSA00546-36](#)



# Lead Free 78 Ohm Bend Relief 3-Slot TRB Solder/ Clamp Plug with Blunt Cut for PE-30-02001 36” Cable

## RF Cable Assemblies Technical Data Sheet

**PE3MSA00546-36**

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length*	36 in [914.4 mm]
Weight	0.303 lbs [137.44 g]

#### Cable

Cable Type	30-02001
Impedance	78 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PE
Shield Layer 1	Silver Plated Copper
Jacket Material	PVC, Blue

One Time Minimum Bend Radius	2.42 in [61.47 mm]
------------------------------	--------------------

### Connectors

Description	Connector 1	Connector 2
Type	TRB Plug	Blunt Cut
Impedance	78 Ohms	
Contact Material and Plating	Bronze, Gold 30 micro inches	
Contact Plating Specification	ASTM-B-488	
Dielectric Type	Teflon	
Outer Conductor Material and Plating	Phosphor Bronze, Gold	
Outer Conductor Plating Specification	30 micro inches	
Body Material and Plating	Brass, Nickel	
Body Plating Specification	ASTM-B-733	

### Environmental Specifications

#### Temperature

Operating Range	-20 to +75 deg C
-----------------	------------------

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: [Lead Free 78 Ohm Bend Relief 3-Slot TRB Solder/Clamp Plug with Blunt Cut for PE-30-02001 Twinax \(.242 O.D.\) 36” Cable PE3MSA00546-36](#)



Lead Free 78 Ohm Bend Relief 3-Slot TRB Solder/  
Clamp Plug with Blunt Cut for PE-30-02001 36" Cable

**RF Cable Assemblies Technical Data Sheet**

**PE3MSA00546-36**

**How to Order**

Part Number Configuration:

**PE3MSA00546**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3MSA00546-12 = 12 inches long cable  
PE3MSA00546-100cm = 100 cm long cable

Lead Free 78 Ohm Bend Relief 3-Slot TRB Solder/Clamp Plug with Blunt Cut for PE-30-02001 36" Cable from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Lead Free 78 Ohm Bend Relief 3-Slot TRB Solder/Clamp Plug with Blunt Cut for PE-30-02001 Twinax \(.242 O.D.\) 36" Cable PE3MSA00546-36](#)

URL: <https://www.pasternack.com/trb-plug-to-blunt-cut-1553-cable-36-inch-length-using-pe-30-02001-lf-solder-pe3msa00546-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3MSA00546-36 CAD Drawing

Lead Free 78 Ohm Bend Relief 3-Slot TRB Solder/Clamp Plug with Blunt Cut for PE-30-02001 36" Cable

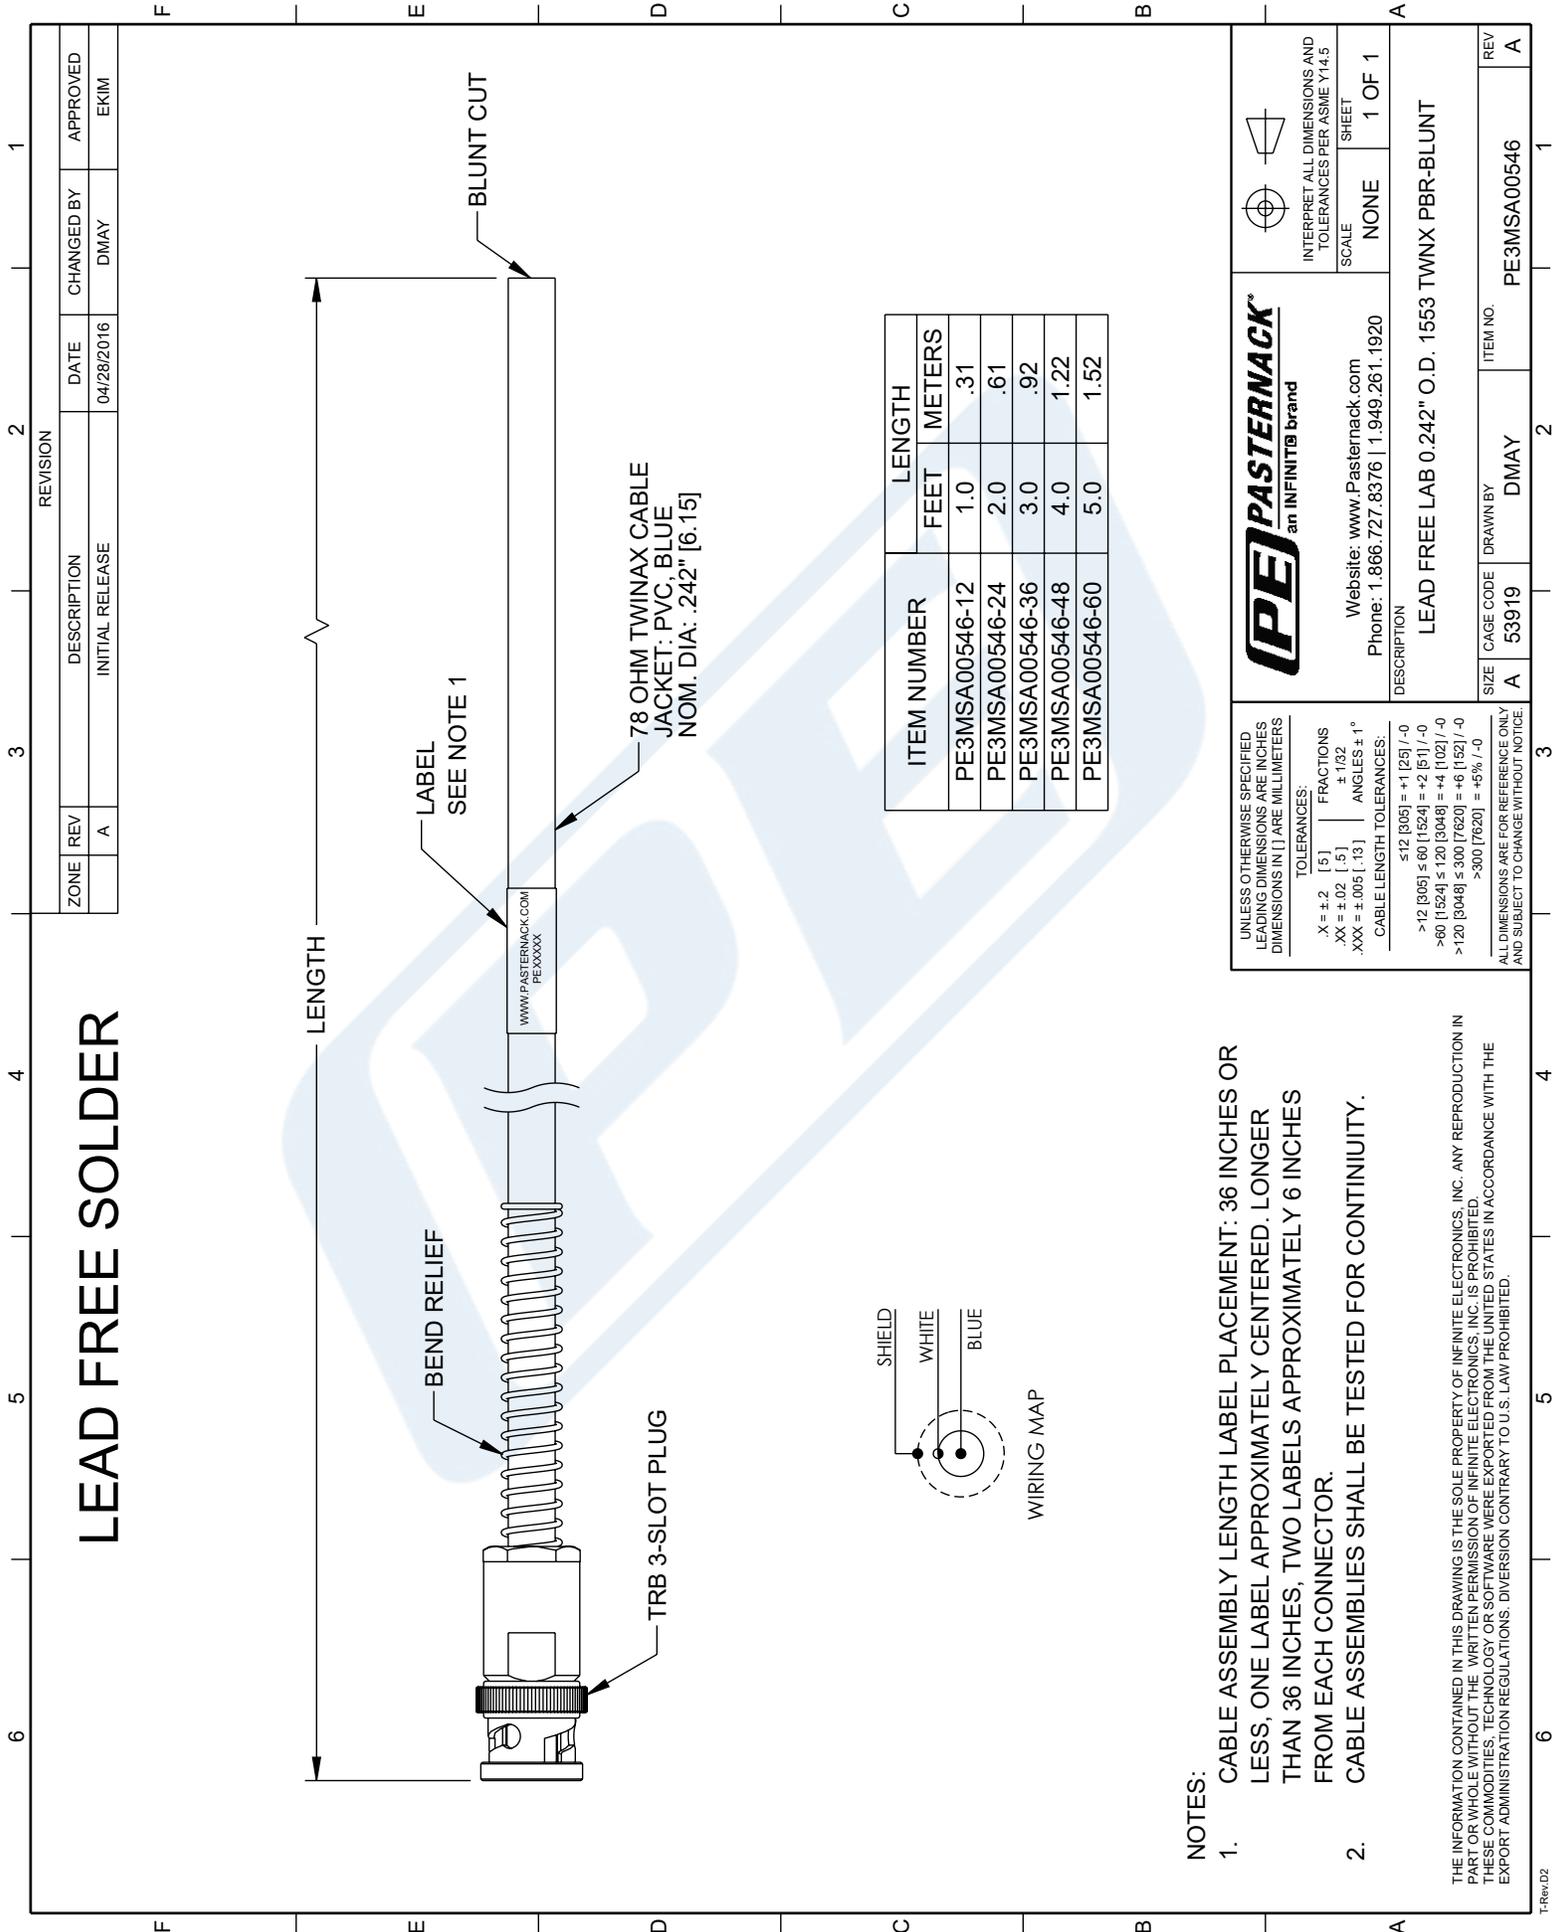

## LEAD FREE SOLDER

LENGTH

BLUNT CUT

LABEL  
SEE NOTE 1


78 OHM TWINAX CABLE  
JACKET: PVC, BLUE  
NOM. DIA: .242" [6.15]

WWW.PASTERNAK.COM  
PEXXXX

BEND RELIEF

TRB 3-SLOT PLUG

ITEM NUMBER	LENGTH	
	FEET	METERS
PE3MSA00546-12	1.0	.31
PE3MSA00546-24	2.0	.61
PE3MSA00546-36	3.0	.92
PE3MSA00546-48	4.0	1.22
PE3MSA00546-60	5.0	1.52



WIRING MAP

### NOTES:

- CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
- CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/28/2016	DMAY	EKIM

**PE PASTERNAK**  
an INFINITO brand

Website: [www.Pasternack.com](http://www.Pasternack.com)  
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION  
LEAD FREE LAB 0.242" O.D. 1553 TWINX PBR-BLUNT

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE NONE SHEET 1 OF 1

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	DMAY	PE3MSA00546

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5]    FRACTIONS ±.1/32  
 .XX = ±.02 [-.5]    ANGLES ± 1°  
 .XXX = ±.005 [-.13]

CABLE LENGTH TOLERANCES:  
 ≤12 [305] = +1 [25] / -0  
 >12 [305] ≤ 60 [1524] = +2 [51] / -0  
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0  
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.