



## Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable

### RF Cable Assemblies Technical Data Sheet

**PE3MSA00607-60**

#### Configuration

- Connector 1: TRB Plug
- Connector 2: TRB Plug
- Cable Type: TWCH-78-2
- Coax Flex Type: Flexible

#### Features

- Max Frequency 500 MHz
- HF POF Jacket
- MIL-STD-1553
- -30°C to +80°C
- 78 ohms
- ROHS Low Smoke Zero Halogen
- Non-Toxic

#### Applications

- General Purpose
- Laboratory Use
- Military Contractors
- MIL-STD-1553
- Data
- Safer Environments
- Ventilation critical areas
- Hospitals

#### Description

Pasternack's PE3MSA00607-60 78 ohm TRB plug to 78 ohm TRB plug 60 inch cable using 78 ohm TWCH-78-2 twinax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TRB to TRB cable assembly has a plug to plug gender configuration with 78 ohm flexible TWCH-78-2 twinax. The PE3MSA00607-60 TRB plug to TRB plug cable assembly operates to 500 MHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable PE3MSA00607-60](#)



Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable

**RF Cable Assemblies Technical Data Sheet**

**PE3MSA00607-60**

**Electrical Specifications**

| Description            | Minimum | Typical      | Maximum | Units        |
|------------------------|---------|--------------|---------|--------------|
| Frequency Range        | DC      |              | 500     | MHz          |
| Capacitance            |         | 21.2 [69.55] |         | pF/ft [pF/m] |
| Operating Voltage (AC) |         |              | 1,000   | Vrms         |

**Specifications by Frequency**

| Description           | F1   | F2    | F3    | F4    | F5  | Units |
|-----------------------|------|-------|-------|-------|-----|-------|
| Frequency             | 10   | 50    | 100   | 200   | 500 | MHz   |
| Insertion Loss (Typ.) | 0.31 | 0.455 | 0.575 | 0.725 | 1   | dB    |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

**Mechanical Specifications**

**Cable Assembly**

|         |                       |
|---------|-----------------------|
| Length* | 60 in [152.4 cm]      |
| Weight  | 0.2638 lbs [119.66 g] |

**Cable**

|                                      |                      |
|--------------------------------------|----------------------|
| Cable Type                           | TWCH-78-2            |
| Impedance                            | 78 Ohms              |
| Inner Conductor Type                 | Stranded             |
| Inner Conductor Material and Plating | Copper, Silver       |
| Dielectric Type                      | PE                   |
| Shield Layer 1                       | Silver Plated Copper |
| Jacket Material                      | HF POF, Blue         |

|                              |                  |
|------------------------------|------------------|
| One Time Minimum Bend Radius | 1.5 in [38.1 mm] |
|------------------------------|------------------|

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable PE3MSA00607-60](#)



Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable

## RF Cable Assemblies Technical Data Sheet

**PE3MSA00607-60**

### Connectors

| Description                           | Connector 1                  | Connector 2                  |
|---------------------------------------|------------------------------|------------------------------|
| Type                                  | TRB Plug Bayonet             | TRB Plug Bayonet             |
| Option                                | Bend Relief Spring           | Bend Relief Spring           |
| Impedance                             | 78 Ohms                      | 78 Ohms                      |
| Contact Material and Plating          | Bronze, Gold 30 micro inches | Bronze, Gold 30 micro inches |
| Contact Plating Specification         | ASTM-B-488                   | ASTM-B-488                   |
| Dielectric Type                       | Teflon                       | Teflon                       |
| Outer Conductor Material and Plating  | Phosphor Bronze, Gold        | Phosphor Bronze, Gold        |
| Outer Conductor Plating Specification | 30 micro inches              | 30 micro inches              |
| Body Material and Plating             | Brass, Nickel                | Brass, Nickel                |
| Body Plating Specification            | ASTM-B-733                   | ASTM-B-733                   |

### Environmental Specifications

#### Temperature

Operating Range -30 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable PE3MSA00607-60](#)



## Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable

### RF Cable Assemblies Technical Data Sheet

**PE3MSA00607-60**

#### How to Order

Part Number Configuration:

**PE3MSA00607**

- **xx**

**uu**

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3MSA00607-12 = 12 inches long cable  
PE3MSA00607-100cm = 100 cm long cable

Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable PE3MSA00607-60](https://www.pasternack.com/trb-plug-to-trb-plug-1553-cable-60-inch-length-using-twch-78-2-pe3msa00607-60-p.aspx)

URL: <https://www.pasternack.com/trb-plug-to-trb-plug-1553-cable-60-inch-length-using-twch-78-2-pe3msa00607-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3MSA00607-60 CAD Drawing

Lead Free LSZH Bend Relief 2-Slot TRB Plug to Plug for 78 Ohm TWCH-78-2, 60" Cable

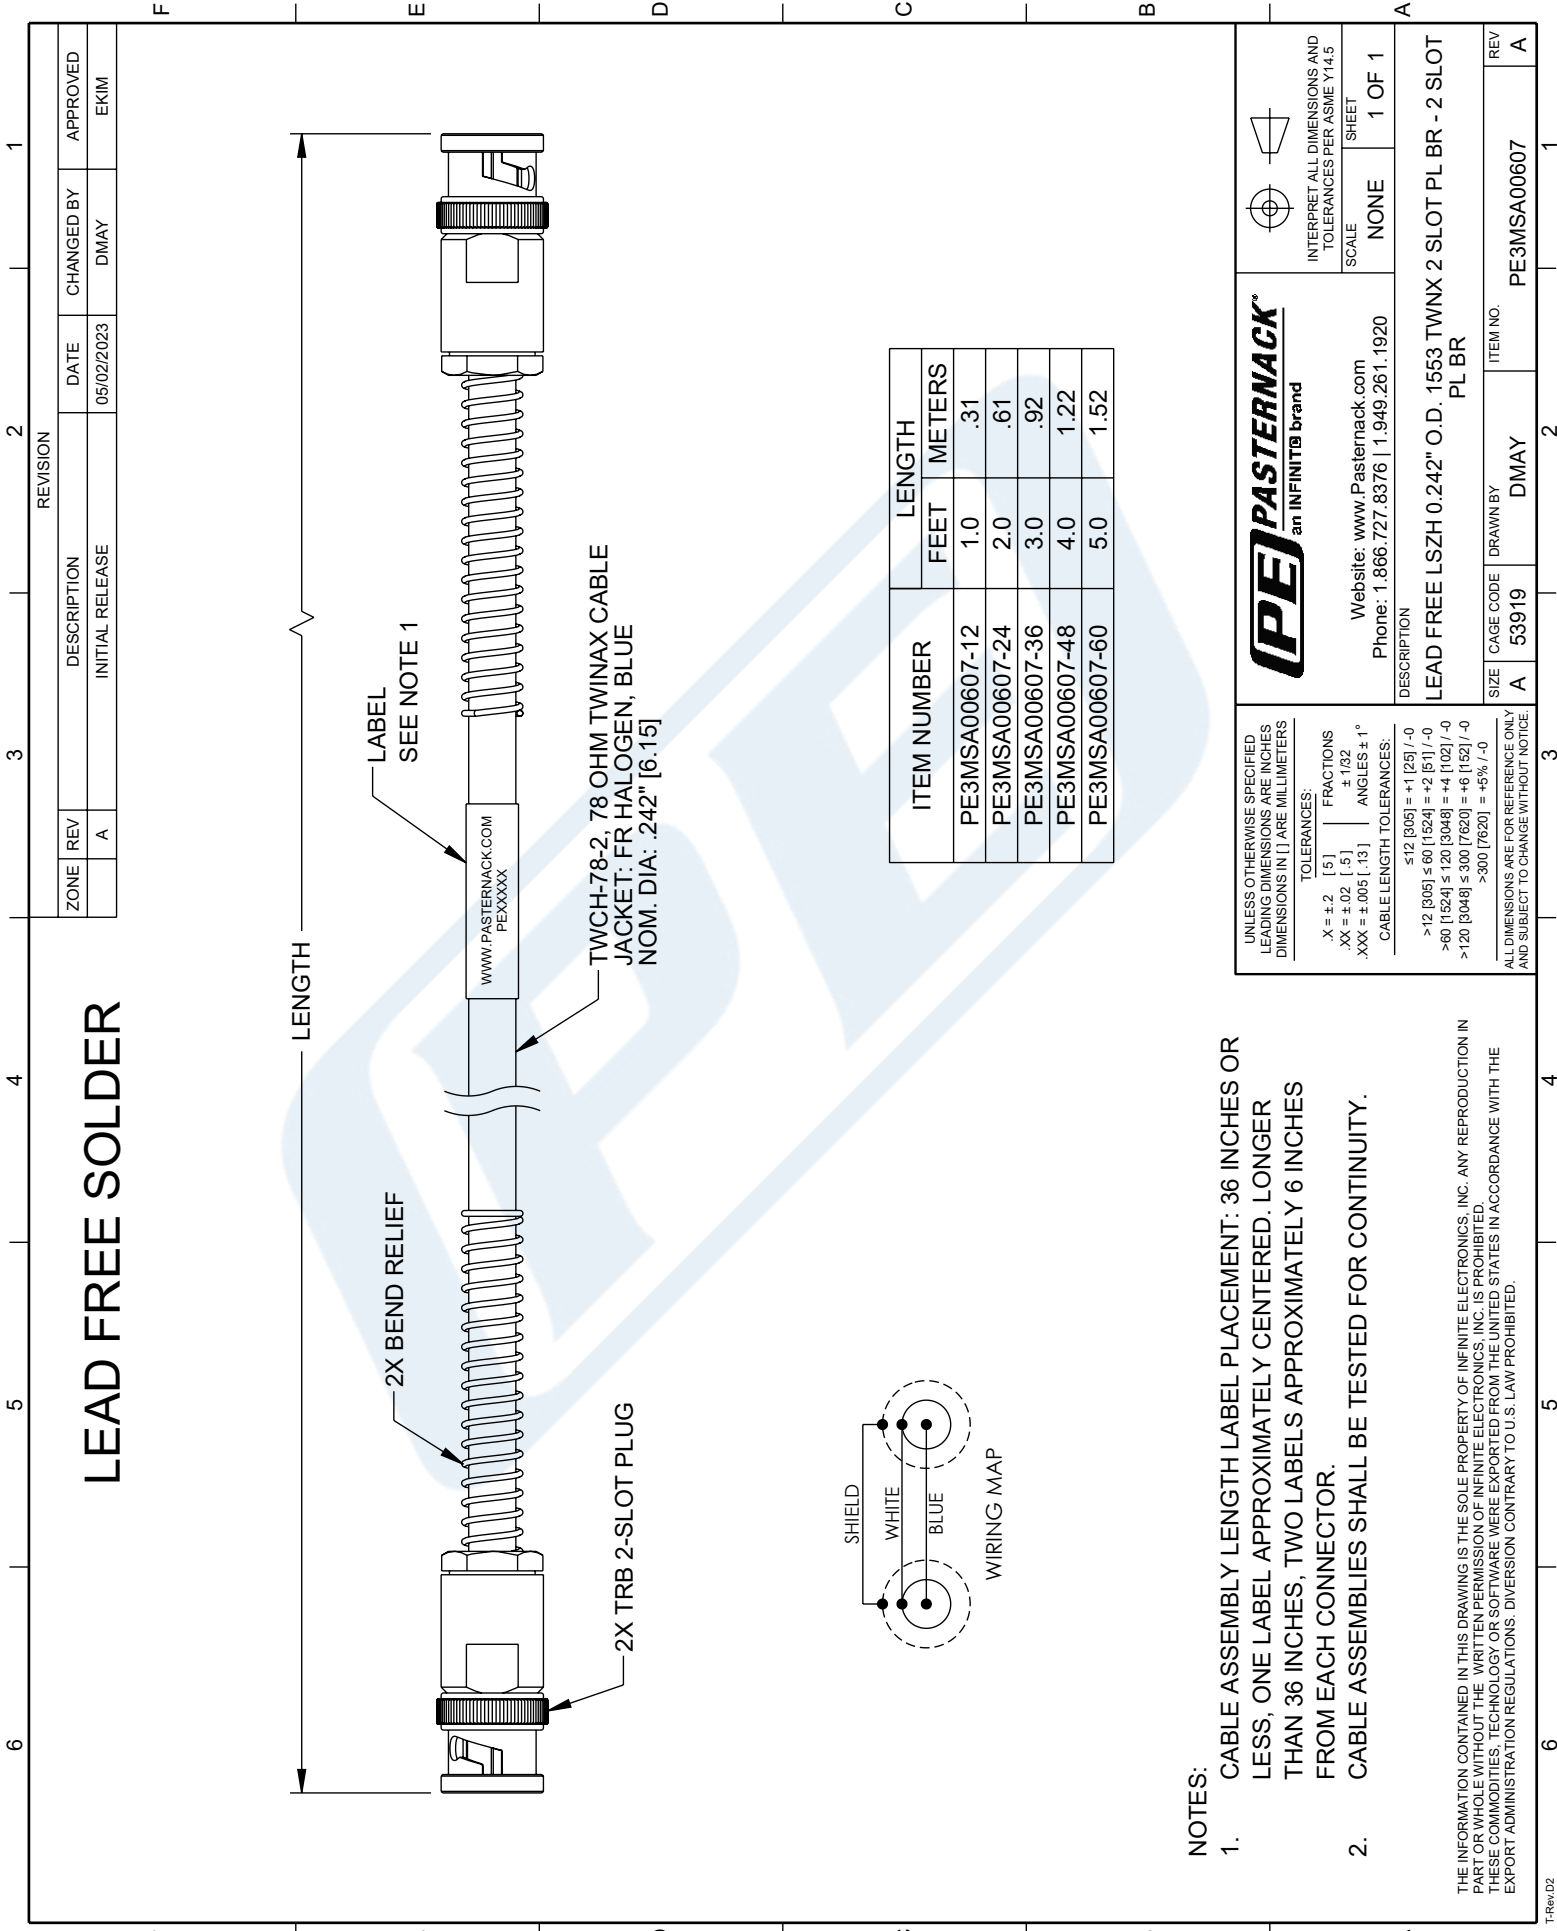


## LEAD FREE SOLDER

LABEL  
SEE NOTE 1

TWCH-78-2, 78 OHM TWINAX CABLE  
JACKET: FR HALOGEN, BLUE  
NOM. DIA: .242" [6.15]

2X BEND RELIEF

2X TRB 2-SLOT PLUG



| ITEM NUMBER    | LENGTH |        |
|----------------|--------|--------|
|                | FEET   | METERS |
| PE3MSA00607-12 | 1.0    | .31    |
| PE3MSA00607-24 | 2.0    | .61    |
| PE3MSA00607-36 | 3.0    | .92    |
| PE3MSA00607-48 | 4.0    | 1.22   |
| PE3MSA00607-60 | 5.0    | 1.52   |

### NOTES:


- CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
- CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5]      FRACTIONS ±.1/32  
 .XX = ±.02 [-.5]      ANGLES ± 1°  
 .XXX = ±.005 [-.13]

CABLE LENGTH TOLERANCES:  
 ≤12 [305] = +.1 [25] / -0  
 >12 [305] ≤ 60 [1524] = +.2 [5] / -0  
 >60 [1524] ≤ 120 [3048] = +.4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = +.6 [152] / -0  
 >300 [7620] = +.5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.



Website: [www.Pasternack.com](http://www.Pasternack.com)  
Phone: 1.866.727.8376 | 1.949.261.1920

### DESCRIPTION

LEAD FREE LSZH 0.242" O.D. 1553 TWNX 2 SLOT PL BR - 2 SLOT PL BR

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5  
SCALE NONE SHEET 1 OF 1

| ZONE | REV | DESCRIPTION     | DATE       | CHANGED BY | APPROVED |
|------|-----|-----------------|------------|------------|----------|
|      | A   | INITIAL RELEASE | 05/02/2023 | DMAY       | EKIM     |

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.