



# 3.5mm Female Bulkhead Connector Clamp/Solder Attachment For PE-SR402AL, PE-SR402FL, RG402, .235 inch D Hole

#### TECHNICAL DATA SHEET

PE4985

## 3.5mm Female Bulkhead Connector Clamp/Solder Attachment For PE-SR402AL, PE-SR402FL, RG402, .235 inch D Hole

Configuration

Connector 3.5mm Female

Connector Interface Type PE-SR402AL,PE-SR402FL,RG402

Cable Attachment Method (Shield/Contact)

Body Style

Mount Method

Clamp/Solder

Straight

Bulkhead

**Electrical Specifications** 

Impedance, Ohms 50

**Mechanical Specifications** 

Size

 Length, in [mm]
 0.865 [21.97]

 Width/Dia., in [mm]
 0.438 [11.13]

 Weight, lbs [g]
 0.013 [5.9]

Connector

Type 3.5mm Female

Contact Material and Plating Gold

Body Material and Plating Passivated Stainless Steel

Dielectric Type PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

**Plotted and Other Data** 

Notes: Values at 25 °C, sea level

3.5mm Female Bulkhead Connector Clamp/Solder Attachment For PE-SR402AL, PE-SR402FL, RG402, .235 inch D Hole from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3.5mm Female Bulkhead Connector Clamp/Solder Attachment For PE-SR402AL, PE-SR402FL, RG402, .235 inch D Hole PE4985

URL: http://www.pasternack.com/3.5mm-female-standard-pe-sr402al-pe-sr402fl-rg402-connector-pe4985-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623

Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com

### PE4985 CAD Drawing

3.5mm Female Bulkhead Connector Clamp/Solder Attachment For

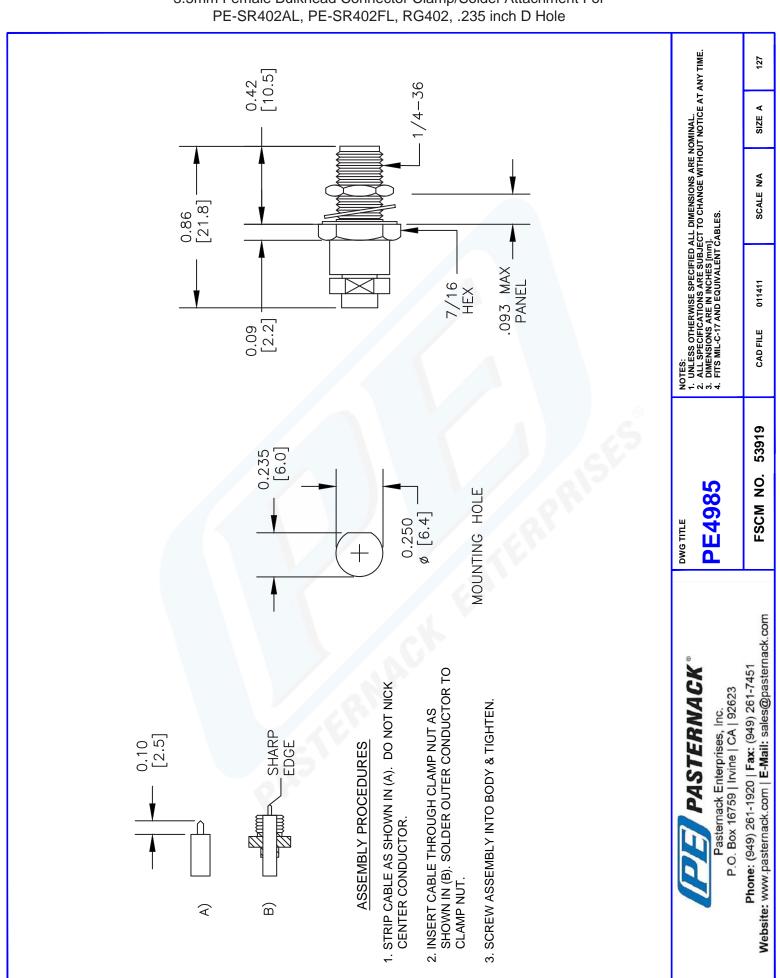





# 3.5mm Female Bulkhead Connector Clamp/Solder Attachment For PE-SR402AL, PE-SR402FL, RG402, .235 inch D Hole

#### TECHNICAL DATA SHEET

PE4985

## 3.5mm Female Bulkhead Connector Clamp/Solder Attachment For PE-SR402AL, PE-SR402FL, RG402, .235 inch D Hole

Configuration

Connector 3.5mm Female

Connector Interface Type PE-SR402AL,PE-SR402FL,RG402

Cable Attachment Method (Shield/Contact)

Body Style

Mount Method

Clamp/Solder

Straight

Bulkhead

**Electrical Specifications** 

Impedance, Ohms 50

**Mechanical Specifications** 

Size

 Length, in [mm]
 0.865 [21.97]

 Width/Dia., in [mm]
 0.438 [11.13]

 Weight, lbs [g]
 0.013 [5.9]

Connector

Type 3.5mm Female

Contact Material and Plating Gold

Body Material and Plating Passivated Stainless Steel

Dielectric Type PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

**Plotted and Other Data** 

Notes: Values at 25 °C, sea level

3.5mm Female Bulkhead Connector Clamp/Solder Attachment For PE-SR402AL, PE-SR402FL, RG402, .235 inch D Hole from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3.5mm Female Bulkhead Connector Clamp/Solder Attachment For PE-SR402AL, PE-SR402FL, RG402, .235 inch D Hole PE4985

URL: http://www.pasternack.com/3.5mm-female-standard-pe-sr402al-pe-sr402fl-rg402-connector-pe4985-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623

Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com

### PE4985 CAD Drawing

3.5mm Female Bulkhead Connector Clamp/Solder Attachment For

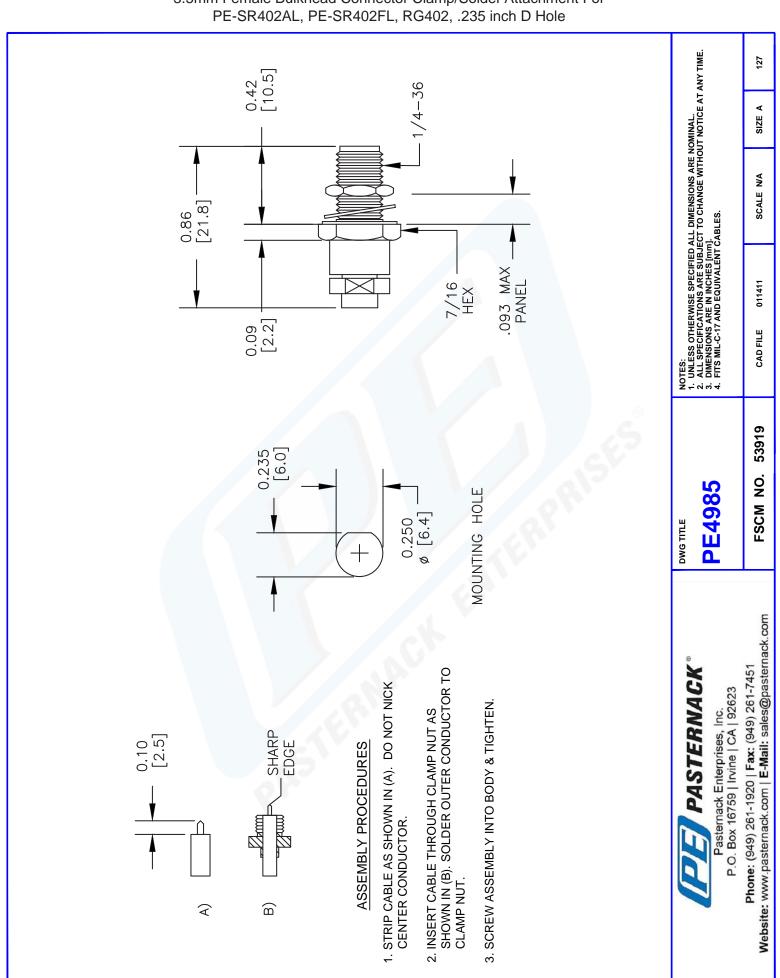





# Formable 141 Semi-rigid Coax Cable with Tinned Copper Braid Outer Conductor

#### RF Cables Technical Data Sheet

PE-SR402FL

#### Configuration

- · Formable Cable
- 1 Shield(s)

#### **Features**

- Dimensionally the same as standard solid outer conductor semi-rigid coax
- · Standard semi-rigid connectors can be used
- Cable is hand formable and does not require special tools to bend
- Connectors are easily soldered to Tin soaked outer conductor
- Cable can be formed more than once without damage to outer conductor
- High RF Shielding >100 dB

#### **Description**

Formable semi-rigid coax is a hand formable version of standard semi-rigid that does not require complicated and costly preformed cable assemblies. Because the dimensions and electrical characteristics are so closely matched to semi-rigid coax, standard semi-rigid connectors can be used. The tin soaked copper braid outer shield provides excellent RF shielding.

#### **Electrical Specifications**

Minimum	Typical	Maximum	Units
DC		20	GHz
	50		Ohms
	69.5		%
110			dB
		7.8	Ohms/1000ft
		5.5	Ohms/1000ft
	29 [95.14]		pF/ft [pF/m]
	DC	DC 50 69.5 110	DC 20 50 69.5 110 7.8 5.5

#### Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	5	10	20	GHz
Attenuation, Typ	8	12	29	45	70	dB/100ft
	26.25	39.37	95.14	147.64	229.66	dB/100m

#### **Mechanical Specifications**

Min. Bend Radius (Repeated)

0.625 in [15.88 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Formable 141 Semi-rigid Coax Cable with Tinned Copper Braid Outer Conductor PE-SR402FL

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





# Formable 141 Semi-rigid Coax Cable with Tinned Copper Braid Outer Conductor

#### RF Cables Technical Data Sheet

PE-SR402FL

#### **Construction Specifications**

Description	Material and Plating	Diameter		
Inner Conductor	Copper, Silver, 1 Strands	0.037 in [0.94 mm]		
Conductor Type	Solid			
Dielectric	PTFE	0.119 in [3.02 mm]		
First Shield	Tinned Copper Braid 100% coverage	0.141 in [3.58 mm]		

#### **Environmental Specifications**

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)

#### **Plotted and Other Data**

Notes:

Formable 141 Semi-rigid Coax Cable with Tinned Copper Braid Outer Conductor from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Formable 141 Semi-rigid Coax Cable with Tinned Copper Braid Outer Conductor PE-SR402FL

URL: https://www.pasternack.com/formable-0.141-semirigid-replacement-50-ohm-coax-cable-tinned-braid-pe-sr402fl-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

### PE-SR402FL CAD Drawing

Formable 141 Semi-rigid Coax Cable with Tinned Copper Braid Outer Conductor

