

SMA Male to SMB Plug Right Angle Low Loss Cable Using LMR-100 Coax, LF Solder

PE3W02909LF




Configuration

- Connector 1: SMA Male
- Connector 2: SMB Plug Right Angle
- Cable Type: LMR-100A
- Coax Flex Type: Flexible

Features

- Max Frequency 2.5 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

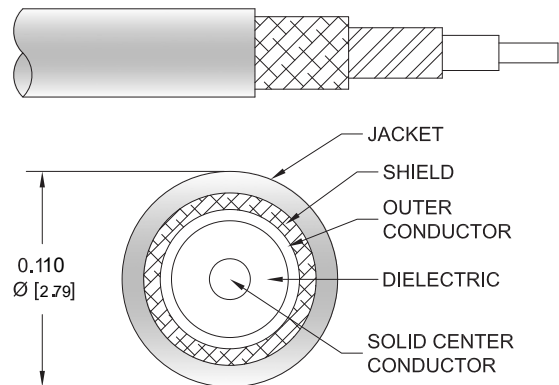

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W02909LF SMA male to SMB plug right angle cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMB cable assembly has a male to plug gender configuration with 50 ohm flexible LMR-100A coax. The PE3W02909LF SMA male to SMB plug cable assembly operates to 2.5 GHz. The right angle SMB interface on the LMR-100A cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2.5	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ohms/1000ft [Ohms/Km]

SMA Male to SMB Plug Right Angle Low Loss Cable Using LMR-100 Coax, LF Solder

PE3W02909LF



Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			2,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	2500	MHz	
PE3W02909LF	Custom Lengths Available	Insertion Loss (Typ.)	0.07	0.115	0.165	0.24	0.398	dB/ft	
			0.23	0.38	0.55	0.79	1.31	dB/m	
PE3W02909LF-24	24 In	Insertion Loss (Typ.)	0.44	0.53	0.63	0.78	1.1	dB	0.042
PE3W02909LF-36	36 In	Insertion Loss (Typ.)	0.51	0.65	0.8	1.02	1.5	dB	0.051
PE3W02909LF-48	48 In	Insertion Loss (Typ.)	0.58	0.76	0.96	1.26	1.9	dB	0.06
PE3W02909LF-100CM	100 CM	Insertion Loss (Typ.)	0.53	0.68	0.85	1.09	1.61	dB	0.054
PE3W02909LF-200CM	200 CM	Insertion Loss (Typ.)	0.76	1.06	1.39	1.88	2.92	dB	0.084

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.033 pounds
Additional Weight per Inch:	0.00075 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.033 lbs [14.97 g]

Cable

Cable Type	LMR-100A
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]
One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

SMA Male to SMB Plug Right Angle Low Loss Cable Using LMR-100 Coax, LF Solder



PE3W02909LF

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMB Plug Right Angle
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification		30 µin minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Nickel
Outer Conductor Plating Specification		100 µin minimum
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification		100 µin minimum
Coupling Nut Material and Plating	Brass, Gold	
Hex Size	5/16 in	
Torque	5 in-lbs 0.57 Nm	

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Male to SMB Plug Right Angle Low Loss Cable Using LMR-100 Coax, LF Solder

PE3W02909LF



Typical Performance Data

How to Order

Part Number Configuration:

PE3W02909LF

- xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3W02909LF-12 = 12 inches long cable
PE3W02909LF-100cm = 100 cm long cable

SMA Male to SMB Plug Right Angle Low Loss Cable Using LMR-100 Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Plug Right Angle Low Loss Cable Using LMR-100 Coax, LF Solder PE3W02909LF](#)

URL: <https://www.pasternack.com/sma-male-to-smb-plug-low-loss-cable-using-lmr-100-lf-solder-pe3w02909lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W02909LF CAD Drawing

SMA Male to SMB Plug Right Angle Low Loss Cable Using LMR-100 Coax, LF Solder

