



## 3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax

### TECHNICAL DATA SHEET


PE3W03192

#### Configuration

- Connector 1: 3.5mm Male
- Connector 2: 3.5mm Male
- Cable Type: PE-SR402FLJ
- Coax Flex Type: Formable

#### Features

- Max Frequency 20 GHz
- Shielding Effectivity > 100 dB
- 70% Phase Velocity
- FEP Jacket

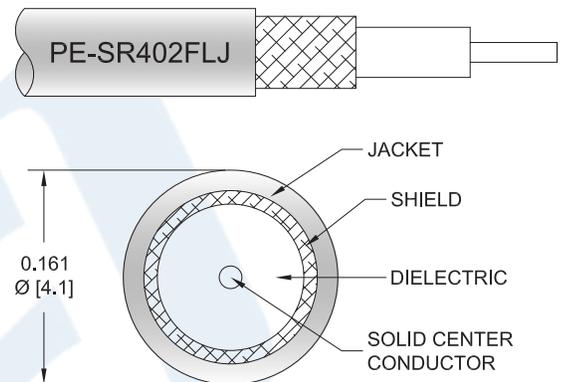

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W03192 3.5mm male to 3.5mm male cable using PE-SR402FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack 3.5mm to 3.5mm cable assembly has a male to male gender configuration with 50 ohm formable PE-SR402FLJ coax. The PE3W03192 3.5mm male to 3.5mm male cable assembly operates to 20 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax PE3W03192](#)



## 3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax

### TECHNICAL DATA SHEET

**PE3W03192**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		20	GHz
Velocity of Propagation		70		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency	1000	2000	4500	9000	#####	
PE3W03192	Custom Lengths Available	Insertion Loss (Typ.)	0.12	0.17	0.29	0.44	0.73	dB/ft	
			0.4	0.56	0.96	1.45	2.4	dB/m	
PE3W03192-6	6 inch	Insertion Loss (Typ.)	0.26	0.29	0.35	0.42	0.57	dB	0.039
PE3W03192-9	9 inch	Insertion Loss (Typ.)	0.29	0.33	0.42	0.53	0.75	dB	0.046
PE3W03192-12	12 inch	Insertion Loss (Typ.)	0.32	0.37	0.49	0.64	0.93	dB	0.053
PE3W03192-18	18 inch	Insertion Loss (Typ.)	0.38	0.46	0.64	0.86	1.3	dB	0.068
PE3W03192-24	24 inch	Insertion Loss (Typ.)	0.44	0.54	0.78	1.08	1.66	dB	0.083

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.053 pounds
Additional Weight per Inch:	0.00242 pounds

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

#### Mechanical Specifications

##### Cable Assembly

Weight 0.053 lbs [24.04 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax PE3W03192](#)



## 3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax

### TECHNICAL DATA SHEET

**PE3W03192**

#### Cable

Cable Type	PE-SR402FLJ
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	FEP, Black
Jacket Diameter	0.161 in [4.09 mm]
One Time Minimum Bend Radius	0.315 in [8 mm]
Repeated Minimum Bend Radius	1.575 in [40.01 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	3.5mm Male Threaded	3.5mm Male Threaded
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Beryllium Copper, Gold over Nickel
Contact Plating Specification	50 µin minimum	50 µin minimum
Dielectric Type	PCTFE	PCTFE
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Hex Size	5/16 inch	5/16 inch
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax PE3W03192](#)



## 3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax

### TECHNICAL DATA SHEET

**PE3W03192**

#### How to Order

Part Number Configuration:

**PE3W03192**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W03192-12 = 12 inches long cable  
PE3W03192-100cm = 100 cm long cable

3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax PE3W03192](https://www.pasternack.com/3.5mm-male-3.5mm-male-pe-sr402flj-cable-assembly-pe3w03192-p.aspx)

URL: <https://www.pasternack.com/3.5mm-male-3.5mm-male-pe-sr402flj-cable-assembly-pe3w03192-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


# PE3W03192 CAD Drawing

3.5mm Male to 3.5mm Male Cable Using PE-SR402FLJ Coax

F E D C B A

1 2 3 4 5 6

ZONE		REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
		A	INITIAL RELEASE	10/17/2023	HBAKKE	AGANWANI

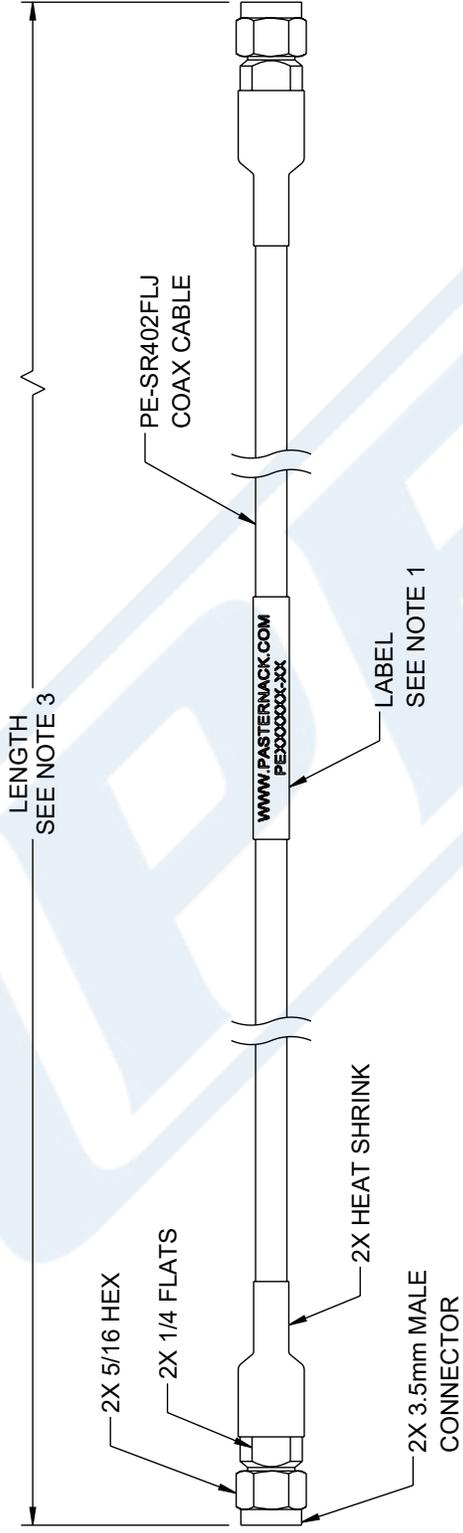

**(PE) PASTERNAK**  
an INFINIT@ brand

Website: [www.Pasternack.com](http://www.Pasternack.com)  
Phone: 1.866.727.8376 | 1.949.261.1920

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE  
SHEET: 1 OF 1

---

DESCRIPTION  
**3.5MM MALE TO 3.5MM MALE CABLE USING PE-SR402FLJ COAX**

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE MILLIMETERS.	TOLERANCES: X = ±.2 [5] XX = ±.02 [0.5] XXX = ±.005 [0.13]	FRACTIONS ± 1/32 ANGLES ± 1°
CABLE LENGTH TOLERANCES: ≤ 12 [305] ≤ ±.1 [2.5] / -0 ≤ 36 [914] ≤ ±.2 [5.1] / -0 > 36 [914] ≤ ±.3 [7.62] / -0 > 60 [1524] ≤ ±.4 [10.2] / -0 > 120 [3048] ≤ ±.6 [15.2] / -0 > 300 [7620] ≤ ±.9 [22.9] / -0	ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE NOTED, DIMENSIONS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.	

- NOTES:**
- CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
  - CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
  - CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
- THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	HBAKKE	PE3W03192	A