



SMA Male to N Male Cable Using RG142 Coax, LF Solder

RF Cable Assemblies Technical Data Sheet


PE3W03293LF

Configuration

- Connector 1: SMA Male
- Connector 2: N Male
- Cable Type: RG142

Features

- Max Frequency 8 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

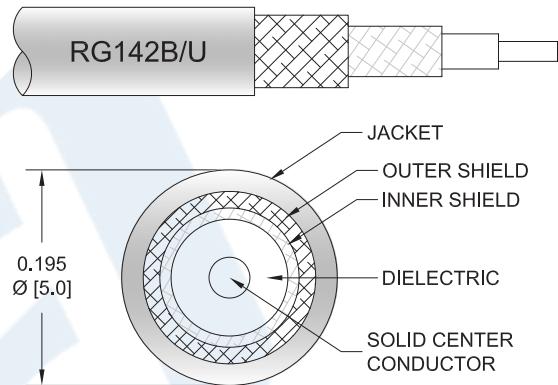

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W03293LF SMA male to type N male cable using RG142 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG142 coax. The PE3W03293LF SMA male to type N male cable assembly operates to 8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Cable Using RG142 Coax, LF Solder PE3W03293LF](#)



SMA Male to N Male Cable Using RG142 Coax, LF Solder

RF Cable Assemblies Technical Data Sheet
PE3W03293LF
Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5	GHz
Insertion Loss (Typ.)	0.054	0.079	0.13	0.211	0.321	dB/ft
	0.18	0.26	0.43	0.69	1.05	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications
Cable Assembly

Weight 0.126 lbs [57.15 g]

Cable

Cable Type	RG142
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.195 in [4.95 mm]

Repeated Minimum Bend Radius 1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Cable Using RG142 Coax, LF Solder PE3W03293LF](#)



SMA Male to N Male Cable Using RG142 Coax, LF Solder

RF Cable Assemblies Technical Data Sheet
PE3W03293LF
Connectors

Description	Connector 1	Connector 2
Type	SMA Male	N Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 μ in minimum	30 μ in
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal
Body Plating Specification	100 μ in minimum	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Tri-Metal
Coupling Nut Plating Specification	100 μ in minimum	
Hex Size	5/16 inch	18 mm
Torque	3 in-lbs [0.34 Nm]	9 in-lbs [1.02 Nm]

Environmental Specifications
Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Cable Using RG142 Coax, LF Solder PE3W03293LF](#)



SMA Male to N Male Cable Using RG142 Coax, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W03293LF

How to Order

Part Number Configuration:

PE3W03293LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W03293LF-12 = 12 inches long cable
PE3W03293LF-100cm = 100 cm long cable

SMA Male to N Male Cable Using RG142 Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Cable Using RG142 Coax, LF Solder PE3W03293LF](#)

URL: <https://www.pasternack.com/sma-male-to-n-male-cable-using-rg142-lf-solder-pe3w03293lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W03293LF CAD Drawing
SMA Male to N Male Cable Using RG142 Coax, LF Solder

