



SMB Plug to N Female Cable 12 Inch Length Using RG141 Coax

RF Cable Assemblies Technical Data Sheet

PE3W04161-12

Configuration

- Connector 1: SMB Plug
- Connector 2: N Female
- Cable Type: RG141

Features

- Max Frequency 4 GHz
- 70% Phase Velocity
- PTFE (FG) Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W04161-12 SMB plug to type N female 12 inch cable using RG141 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMB to type N cable assembly has a plug to female gender configuration with 50 ohm flexible RG141 coax. The PE3W04161-12 SMB plug to type N female cable assembly operates to 4 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.6:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	4	GHz
Insertion Loss (Max.)	0.3	0.3	0.3	0.4	0.5	dB

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to N Female Cable 12 Inch Length Using RG141 Coax PE3W04161-12](#)



SMB Plug to N Female Cable 12 Inch Length Using RG141 Coax

RF Cable Assemblies Technical Data Sheet

PE3W04161-12

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connectro loss.

Mechanical Specifications

Cable Assembly

Length*

12 in [304.8 mm]

Cable

Cable Type

RG141

Impedance

50 Ohms

Inner Conductor Type

Solid

Inner Conductor Material and Plating

Copper Clad Steel, Silver

Dielectric Type

PTFE

Number of Shields

1

Shield Layer 1

Silver Plated Copper

Jacket Material

PTFE (FG), Beige

Jacket Diameter

0.19 in [4.83 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMB Plug	N Female
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	
Contact Plating Specification	30 μ in minimum	
Dielectric Type	PTFE	
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to N Female Cable 12 Inch Length Using RG141 Coax PE3W04161-12](#)



SMB Plug to N Female Cable 12 Inch Length Using RG141 Coax

RF Cable Assemblies Technical Data Sheet

PE3W04161-12

How to Order

Part Number Configuration:

PE3W04161- **xx****uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE3W04161-12 = 12 inches long cable
PE3W04161-100cm = 100 cm long cable

SMB Plug to N Female Cable 12 Inch Length Using RG141 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to N Female Cable 12 Inch Length Using RG141 Coax PE3W04161-12](#)

URL: <https://www.pasternack.com/smb-plug-n-female-rg141au-cable-assembly-pe3w04161-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W04161-12 CAD Drawing
SMB Plug to N Female Cable 12 Inch Length Using RG141 Coax

REVISIONS					
REV.	DESCRIPTION	DATE	APPROVED		
B	ADDED HEATSHRINK	2/23/2022	SRAUTUS		

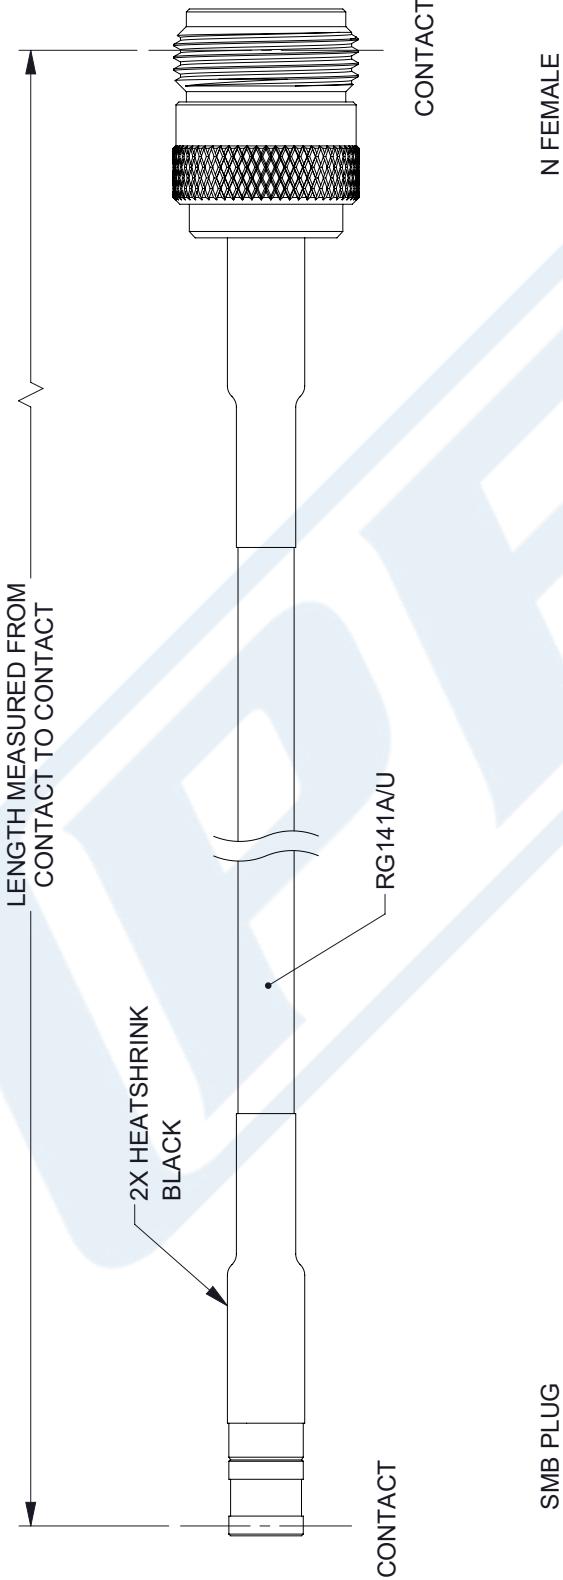

 PASTERACK an INFINITE brand		THIRD ANGLE PROJECTION	
		THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERACK CORPORATION ALL RIGHTS RESERVED.	
P	P	Pasterack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasterack.com E-mail: sales@pasterack.com	SHEET 1 OF 1
S	E	SCALE N/A	ITEM NO. PE3W04161
A	53919	KDANG	REV B

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS
TOLERANCES:

X = ± 2	[.08]	FRACTIONS	$\pm 1/32$
XX = $\pm .02$	[.51]	ANGLES $\pm 1^\circ$	
XXX = $\pm .005$	[.13]	CABLE LENGTH (L) TOLERANCES:	
		L \leq 12 [305] ± 1 [25] / -0	
		12 [305] $<$ L \leq 60 [1524] $= +2$ [51] / -0	
		60 [1524] $<$ L \leq 120 [3048] $= +4$ [102] / -0	
		120 [3048] $<$ L \leq 300 [7620] $= +6$ [152] / -0	
		300 [7620] $<$ L $= +5$ [L] / -0	

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.