



TNC Male to N Male Low Loss Cable 200 cm
Length Using LMR-240 Coax

TECHNICAL DATA SHEET


PE3W04201-200CM

Configuration

- Connector 1: TNC Male
- Connector 2: N Male
- Cable Type: LMR-240
- Coax Flex Type: Flexible

Features

- Max Frequency 5.8 MHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

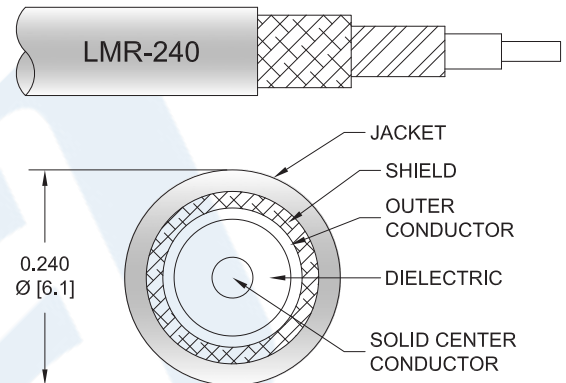

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W04201-200CM TNC male to type N male 200 cm cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240 coax. The PE3W04201-200CM TNC male to type N male cable assembly operates to 5.8 MHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Male Low Loss Cable 200 cm Length Using LMR-240 Coax PE3W04201-200CM](#)



TNC Male to N Male Low Loss Cable 200 cm Length Using LMR-240 Coax

TECHNICAL DATA SHEET

PE3W04201-200CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	MHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ω/1000ft [Ω/Km]
Jacket Spark			5,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	8	GHz
Insertion Loss (Max.)	0.456	0.564	0.723	1.046	1.538	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated loss of 0.2dB of connector loss.

Mechanical Specifications

Cable Assembly

Weight 0.358 lbs [162.39 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Male Low Loss Cable 200 cm Length Using LMR-240 Coax PE3W04201-200CM](#)



TNC Male to N Male Low Loss Cable 200 cm
Length Using LMR-240 Coax

TECHNICAL DATA SHEET

PE3W04201-200CM

Cable

Cable Type	LMR-240
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.25 lbs-ft [0.34 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Threaded	N Male Threaded
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	Teflon	Dielectric
Outer Conductor Material and Plating		Beryllium Copper, Silver
Body Material and Plating	Brass, Tri-Metal	Brass, Silver
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Silver

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

PE3W04201-200CM CAD Drawing

TNC Male to N Male Low Loss Cable 200 cm Length Using LMR-240 Coax

REVISION				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	B	UPDATE N MALE CONNECTOR PER ECO-12676	07/05/2023	DMAY
				APPROVED
				SELLIS

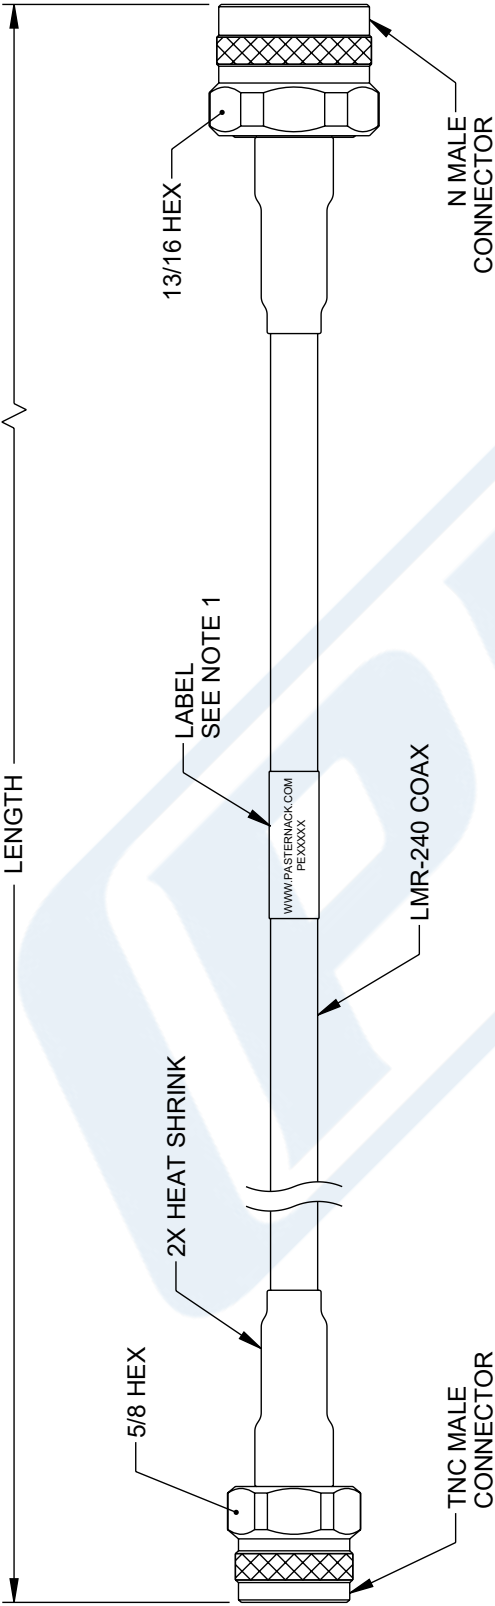

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: <table><tr><td>X = ± .2</td><td>[.008]</td><td>FRACTIONS</td></tr><tr><td>.XX = ± .02</td><td>[.51]</td><td>± 1/32</td></tr><tr><td>.XXX = ± .005</td><td>[.13]</td><td>ANGLES ± 1°</td></tr></table> CABLE LENGTH (L) TOLERANCES: <table><tr><td>L ≤ 12 [305]</td><td>= +1 [25] / -0</td></tr><tr><td>12 [305] < L ≤ 60 [1524]</td><td>= +2 [51] / -0</td></tr><tr><td>60 [1524] < L ≤ 120 [3048]</td><td>= +4 [102] / -0</td></tr><tr><td>120 [3048] < L ≤ 300 [7620]</td><td>= +6 [152] / -0</td></tr><tr><td>300 [7620] < L</td><td>= +5% / -0</td></tr></table> ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.				X = ± .2	[.008]	FRACTIONS	.XX = ± .02	[.51]	± 1/32	.XXX = ± .005	[.13]	ANGLES ± 1°	L ≤ 12 [305]	= +1 [25] / -0	12 [305] < L ≤ 60 [1524]	= +2 [51] / -0	60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0	120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0	300 [7620] < L	= +5% / -0	PE PASTERNAK an INFINITI® brand Pasternack Enterprises, Inc. P.O.Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com				THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A				REV B	
X = ± .2	[.008]	FRACTIONS																														
.XX = ± .02	[.51]	± 1/32																														
.XXX = ± .005	[.13]	ANGLES ± 1°																														
L ≤ 12 [305]	= +1 [25] / -0																															
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0																															
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0																															
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0																															
300 [7620] < L	= +5% / -0																															
SIZE A CAGE CODE 53919 DRAWN BY DMAY ITEM NO. PE3W04201																																
THIRD-ANGLE PROJECTION																																