



## N Female to N Female Cable 200 cm Using LMR-600-DB Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W05453-200CM**

#### Configuration

- Connector 1: N Female
- Connector 2: N Female
- Cable Type: LMR-600-DB

#### Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity
- Double Shielded
- PE Jacket


#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W05453-200CM type N female to type N female 200 cm cable using LMR-600-DB coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a female to female gender configuration with 50 ohm flexible LMR-600-DB coax. The PE3W05453-200CM type N female to type N female cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

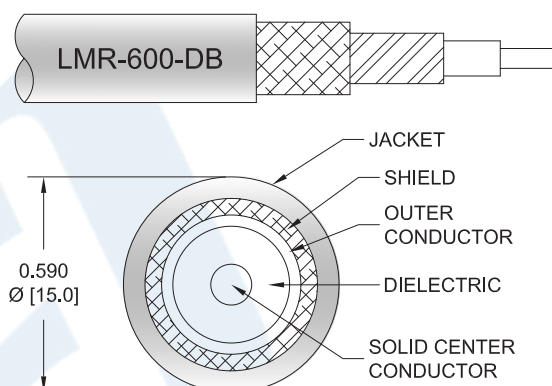

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to N Female Cable 200 cm Using LMR-600-DB Coax PE3W05453-200CM](#)



## N Female to N Female Cable 200 cm Using LMR-600-DB Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W05453-200CM**

#### Electrical Specifications

| Description                   | Minimum | Typical      | Maximum | Units           |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range               | DC      |              | 5.8     | GHz             |
| VSWR                          |         |              | 1.4:1   |                 |
| Velocity of Propagation       |         | 87           |         | %               |
| RF Shielding                  | 90      |              |         | dB              |
| Group Delay                   |         | 1.17 [3.84]  |         | ns/ft [ns/m]    |
| Capacitance                   |         | 23.4 [76.77] |         | pF/ft [pF/m]    |
| Inductance                    |         | 0.058 [0.19] |         | uH/ft [uH/m]    |
| DC Resistance Inner Conductor |         | 0.53 [1.74]  |         | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor |         | 1.2 [3.94]   |         | Ω/1000ft [Ω/Km] |
| Jacket Spark                  |         |              | 8,000   | Vrms            |

#### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 0.25 | 0.5  | 1    | 2.5  | 5.8  | GHz   |
| Insertion Loss (Max.) | 0.29 | 0.32 | 0.38 | 0.49 | 0.68 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.1 dB per N female connector.

#### Mechanical Specifications

##### Cable Assembly

|          |                    |
|----------|--------------------|
| Length*  | 78.74 in [200 cm]  |
| Diameter | 0.67 in [17.02 mm] |

##### Cable

|                                      |                      |
|--------------------------------------|----------------------|
| Cable Type                           | LMR-600-DB           |
| Impedance                            | 50 Ohms              |
| Inner Conductor Type                 | Solid                |
| Inner Conductor Material and Plating | Copper Clad Aluminum |
| Dielectric Type                      | PE (F)               |
| Number of Shields                    | 2                    |
| Shield Layer 1                       | Aluminum Tape        |
| Shield Layer 2                       | Tinned Copper Braid  |
| Jacket Material                      | PE, Black            |
| Jacket Diameter                      | 0.59 in [14.99 mm]   |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to N Female Cable 200 cm Using LMR-600-DB Coax PE3W05453-200CM](#)



## N Female to N Female Cable 200 cm Using LMR-600-DB Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W05453-200CM**

|                              |                        |
|------------------------------|------------------------|
| One Time Minimum Bend Radius | 1.5 in [38.1 mm]       |
| Repeated Minimum Bend Radius | 6 in [152.4 mm]        |
| Bending Moment               | 2.75 lbs-ft [3.73 N-m] |
| Flat Plate Crush             | 60 lbs/in [1.07 Kg/mm] |
| Tensile Strength             | 350 lbs [158.76 Kg]    |

#### Connectors

| Description                          | Connector 1      | Connector 2      |
|--------------------------------------|------------------|------------------|
| Type                                 | N Female         | N Female         |
| Impedance                            | 50 Ohms          | 50 Ohms          |
| Contact Material and Plating         | Bronze, Gold     | Bronze, Gold     |
| Dielectric Type                      | PTFE             | PTFE             |
| Outer Conductor Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Body Material and Plating            | Brass, Tri-Metal | Brass, Tri-Metal |

#### Environmental Specifications

##### Temperature

Operating Range -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to N Female Cable 200 cm Using LMR-600-DB Coax PE3W05453-200CM](#)



## N Female to N Female Cable 200 cm Using LMR-600-DB Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W05453-200CM**

#### How to Order

Part Number Configuration:

**PE3W05453**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W05453-12 = 12 inches long cable  
PE3W05453-100cm = 100 cm long cable

N Female to N Female Cable 200 cm Using LMR-600-DB Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to N Female Cable 200 cm Using LMR-600-DB Coax PE3W05453-200CM](#)

URL: <https://www.pasternack.com/n-female-n-female-lmr600db-cable-assembly-pe3w05453-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W05453-200CM CAD Drawing  
N Female to N Female Cable 200 cm Using LMR-600-DB Coax

| REVISIONS |                 |           |          |
|-----------|-----------------|-----------|----------|
| REV.      | DESCRIPTION     | DATE      | APPROVED |
| A         | INITIAL RELEASE | 1/20/2020 | SELLIS   |

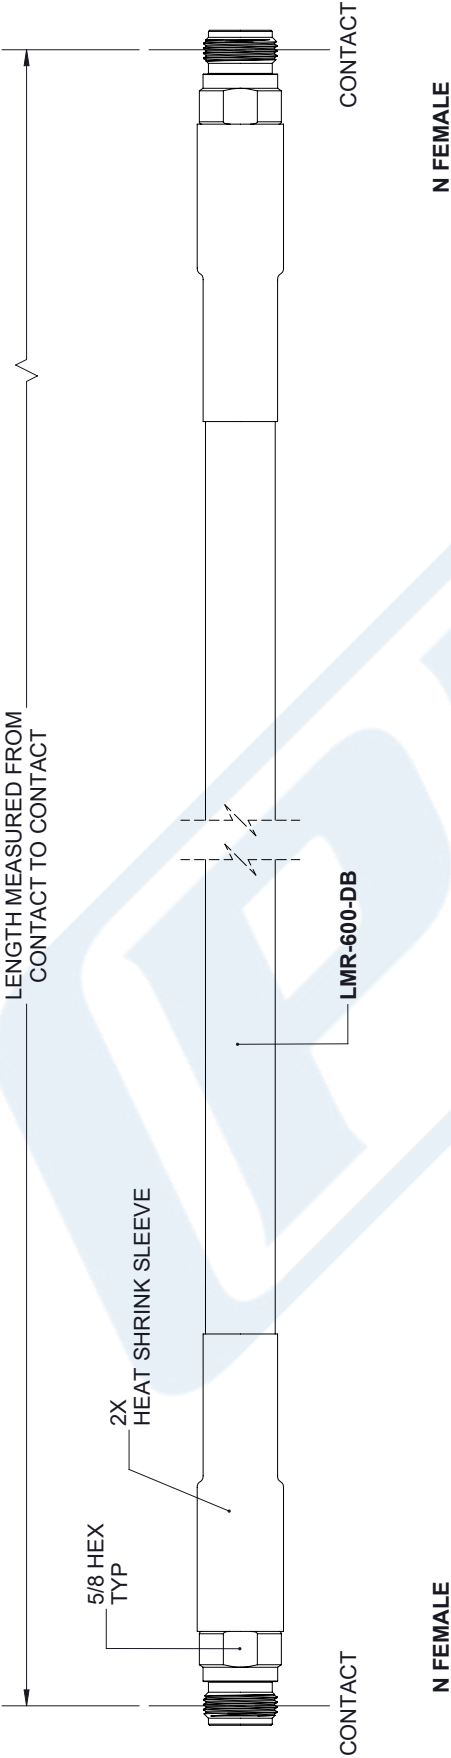

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

**TOLERANCES:**

|               |       |             |
|---------------|-------|-------------|
| .X = ± .2     | [.08] | FRACTIONS   |
| .XX = ± .02   | [.51] | ± 1/32      |
| .XXX = ± .005 | [.13] | ANGLES ± 1° |

**CABLE LENGTH (L) TOLERANCES:**

|                             |                 |
|-----------------------------|-----------------|
| L ≤ 12 [305]                | = +1 [25] / -0  |
| 12 [305] < L ≤ 60 [1524]    | = +2 [51] / -0  |
| 60 [1524] < L ≤ 120 [3048]  | = +4 [102] / -0 |
| 120 [3048] < L ≤ 300 [7620] | = +6 [152] / -0 |
| 300 [7620] < L              | = +5% L / -0    |

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE PASTERNAK**  
an INFINITI® brand

Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: [www.pasternack.com](http://www.pasternack.com)  
E-mail: [sales@pasternack.com](mailto:sales@pasternack.com)

THIRD-ANGLE PROJECTION

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION  
ALL RIGHTS RESERVED.

|       |     |    |   |
|-------|-----|----|---|
| SHEET | 1   | OF | 1 |
| SCALE | N/A |    |   |
| REV   | A   |    |   |

|      |           |          |           |
|------|-----------|----------|-----------|
| SIZE | CAGE CODE | DRAWN BY | ITEM NO.  |
| A    | 53919     | K.DANG   | PE3W05453 |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.