



## C Male to HN Male Right Angle Cable Using RG393 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W07415**

#### Configuration

- Connector 1: C Male
- Connector 2: HN Male Right Angle
- Cable Type: RG393

#### Features

- Max Frequency 3 GHz
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W07415 type C male to HN male right angle cable using RG393 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type C to HN cable assembly has a male to male gender configuration with 50 ohm flexible RG393 coax. The PE3W07415 type C male to HN male cable assembly operates to 3 GHz. The right angle HN interface on the RG393 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [C Male to HN Male Right Angle Cable Using RG393 Coax PE3W07415](#)



## C Male to HN Male Right Angle Cable Using RG393 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W07415**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.021	0.03	0.045	0.075	0.142	dB/ft
	0.07	0.1	0.15	0.25	0.47	

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the C Male straight connector and 0.2 dB for the HN Male right angle connector.

#### Mechanical Specifications

##### Cable Assembly

Weight 0.464 lbs [210.47 g]

##### Cable

Cable Type RG393  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Number of Shields 2  
 Shield Layer 1 Silver Plated Copper Braid  
 Shield Layer 2 Silver Plated Copper Braid  
 Jacket Material FEP, Tan  
 Jacket Diameter 0.39 in [9.91 mm]  
 Repeated Minimum Bend Radius 3.9 in [99.06 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [C Male to HN Male Right Angle Cable Using RG393 Coax PE3W07415](#)



## C Male to HN Male Right Angle Cable Using RG393 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W07415**

#### Connectors

Description	Connector 1	Connector 2
Type	C Male	HN Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 $\mu$ in minimum	30 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 $\mu$ in minimum	100 $\mu$ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 $\mu$ in minimum	100 $\mu$ in minimum

#### Mechanical Specification Notes:

When attaching the connector to the cable, use a clamp torque value of 60 to 65 in-lbs [6.78 to 7.34 Nm]

#### Environmental Specifications

##### Temperature

Operating Range -55 to +165 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [C Male to HN Male Right Angle Cable Using RG393 Coax PE3W07415](#)



## C Male to HN Male Right Angle Cable Using RG393 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W07415**

#### How to Order

Part Number Configuration:

**PE3W07415**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W07415-12 = 12 inches long cable  
PE3W07415-100cm = 100 cm long cable

C Male to HN Male Right Angle Cable Using RG393 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [C Male to HN Male Right Angle Cable Using RG393 Coax PE3W07415](https://www.pasternack.com/c-male-to-hn-male-cable-using-rg393-pe3w07415-p.aspx)

URL: <https://www.pasternack.com/c-male-to-hn-male-cable-using-rg393-pe3w07415-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W07415 CAD Drawing

## C Male to HN Male Right Angle Cable Using RG393 Coax

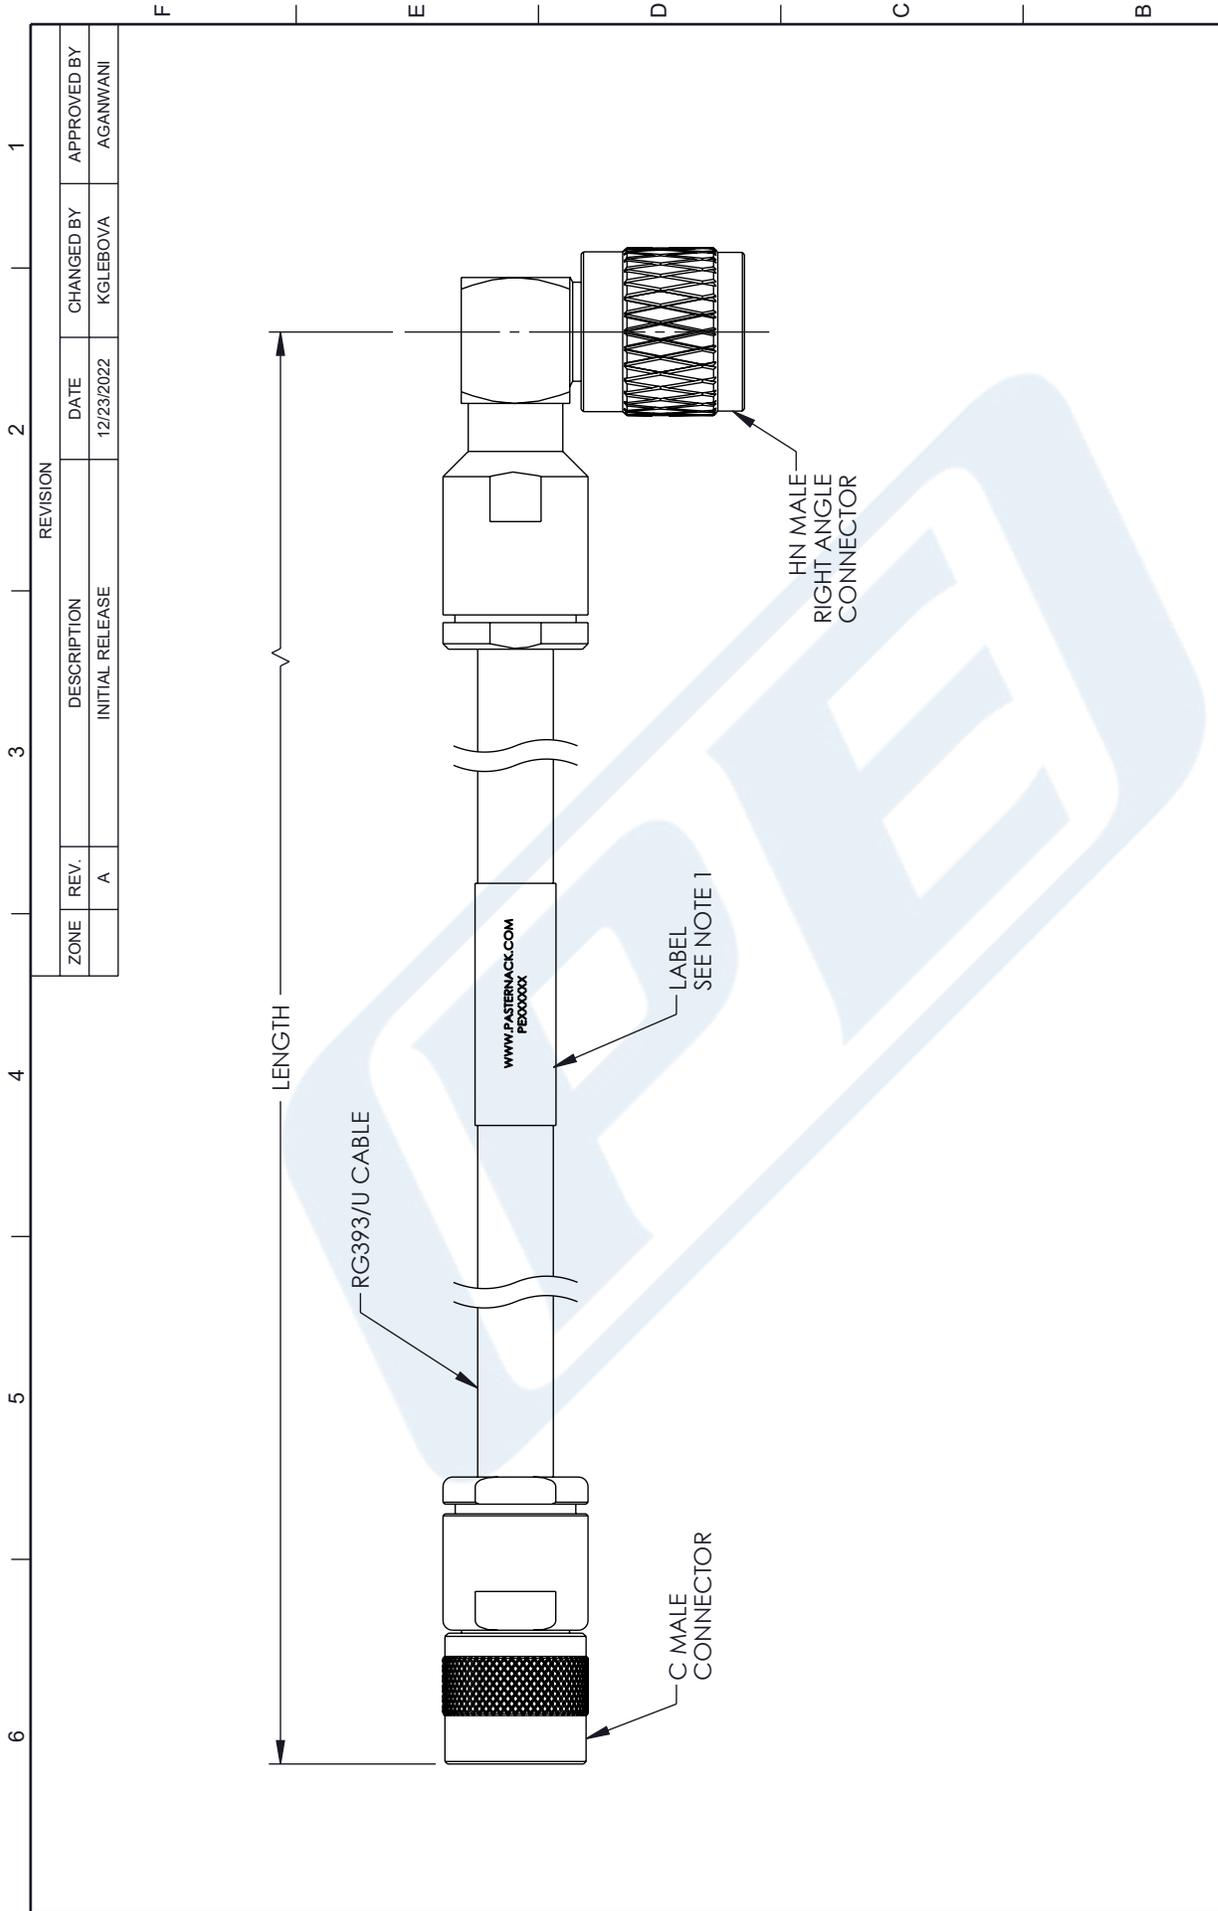

 <p style="font-size: small;">Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a> Phone: 1.866.727.8376   1.949.261.1920</p>	<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE SHEET: 1 OF 1</p>
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p>TOLERANCES:  .X = ±.2 [ .5 ] FRACTIONS ±.1/32  .XX = ±.02 [ .5 ] ANGLES ± 1°  .XXX = ±.005 [ .13 ]</p> <p>CABLE LENGTH TOLERANCES:  &gt;12 [305] = +1 [25] / -0  &gt;12 [305] ≤ 60 [1524] = +2 [51] / -0  &gt;60 [1524] ≤ 120 [3048] = +4 [102] / -0  &gt;120 [3048] ≤ 300 [7620] = +6 [152] / -0  &gt;300 [7620] = +5% / -0</p> <p>ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.</p>	<p>DESCRIPTION <b>C MALE TO HN MALE RIGHT ANGLE CABLE USING RG393 COAX</b></p> <p>SIZE: A CAGE CODE: 53919 DRAWN BY: KGLEBOVA ITEM NO.: PE3W07415 REV: A</p>

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.