

SMA Male Right Angle to SMA Male Cable Using PE-SR405FL Coax, LF Solder




PE3W07448LF

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male
- Cable Type: PE-SR405FL
- Coax Flex Type: Formable

Features

- Max Frequency 10 GHz
- 69.5% Phase Velocity

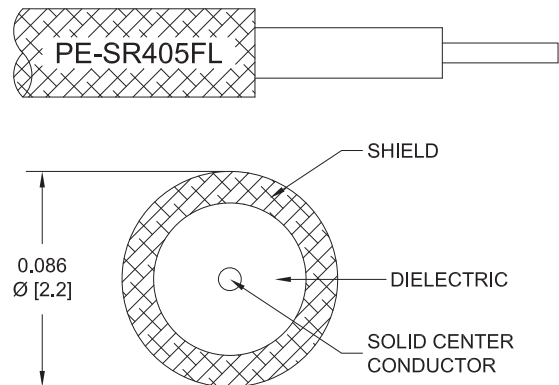

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07448LF SMA male right angle to SMA male cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm formable PE-SR405FL coax. The PE3W07448LF SMA male to SMA male cable assembly operates to 10 GHz. The right angle SMA interface on the PE-SR405FL cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ohms/1000ft [Ohms/Km]

Specifications by Frequency

SMA Male Right Angle to SMA Male Cable
Using PE-SR405FL Coax, LF Solder



PE3W07448LF

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		500	1000	2500	5000	
PE3W07448LF	Custom Lengths Available	Insertion Loss (Typ.)	0.15	0.23	0.345	0.549	0.812	dB/ft	
			0.5	0.74	1.14	1.81	2.67	dB/m	
PE3W07448LF-6	6 inch	Insertion Loss (Typ.)	0.38	0.42	0.48	0.58	0.71	dB	0.027
PE3W07448LF-9	9 inch	Insertion Loss (Typ.)	0.42	0.47	0.56	0.72	0.91	dB	0.03
PE3W07448LF-12	12 inch	Insertion Loss (Typ.)	0.45	0.53	0.65	0.85	1.12	dB	0.032
PE3W07448LF-24	24 inch	Insertion Loss (Typ.)	0.6	0.75	0.99	1.4	1.93	dB	0.044
PE3W07448LF-36	36 inch	Insertion Loss (Typ.)	0.75	0.98	1.34	1.95	2.74	dB	0.055

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB
 Loss due to Connector 2: 0.1 dB
 Base Weight: 0.032 pounds
 Additional Weight per Inch: 0.00092 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter: 0.5 in [12.7 mm]
 Weight: 0.032 lbs [14.51 g]

Cable

Cable Type: PE-SR405FL
 Impedance: 50 Ohms
 Inner Conductor Type: Solid
 Inner Conductor Material and Plating: Copper Clad Steel, Silver
 Dielectric Type: PTFE
 Number of Shields: 1
 Outer Conductor 1 Material and Plating: Copper, Tin
 Repeated Minimum Bend Radius: 0.78 in [19.81 mm]

SMA Male Right Angle to SMA Male Cable
Using PE-SR405FL Coax, LF Solder



PE3W07448LF

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Male
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Mating Cycles		500
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50 µin minimum	ASTM-B488
Dielectric Type	PTFE	PTFE
Body Material and Plating	Stainless Steel, Gold	Beryllium Copper, Gold
Body Plating Specification	30 µin minimum	ASTM-B488
Coupling Nut Material and Plating	Brass, Nickel	Steel
Coupling Nut Plating Specification	100 µin minimum	
Hex Size	5/16 inch	
Torque	5 in-lbs 0.57 Nm	10 in-lbs 1.13 Nm
Seal Gasket Material		Silicone Rubber

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Male Right Angle to SMA Male Cable Using PE-SR405FL Coax, LF Solder



PE3W07448LF

Typical Performance Data

How to Order

Part Number Configuration:

PE3W07448LF - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE3W07448LF-12 = 12 inches long cable
PE3W07448LF-100cm = 100 cm long cable

SMA Male Right Angle to SMA Male Cable Using PE-SR405FL Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Cable Using PE-SR405FL Coax, LF Solder PE3W07448LF](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-sma-male-cable-using-pe-sr405fl-lf-solder-pe3w07448lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W07448LF CAD Drawing

SMA Male Right Angle to SMA Male Cable Using PE-SR405FL Coax, LF Solder

