



**BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable
50 cm Length Using 78 Ohm RG108 Coax , LF Solder**

RF Cable Assemblies Technical Data Sheet

PE3W09940LF-50CM

Configuration

- Connector 1: BNC Twinax Jack
- Connector 2: BNC Twinax Jack Bulkhead
- Cable Type: RG108

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W09940LF-50CM 78 ohm BNC Twinax jack to 78 ohm BNC Twinax jack bulkhead 50 cm cable using 78 ohm RG108 twinax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC Twinax to BNC Twinax cable assembly has a jack to jack gender configuration with 78 ohm flexible RG108 twinax. The PE3W09940LF-50CM BNC Twinax jack to BNC Twinax jack cable assembly operates to 1 GHz. Our RF cable assembly with BNC Twinax bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable 50 cm Length Using 78 Ohm RG108 Coax , LF Solder PE3W09940LF-50CM](#)



**BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable
50 cm Length Using 78 Ohm RG108 Coax , LF Solder**

RF Cable Assemblies Technical Data Sheet

PE3W09940LF-50CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.45:1	
Velocity of Propagation		66		%
Capacitance		19.7 [64.63]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Max.)	0.27	0.35	0.38	0.51	0.77	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length*	19.68 in [499.87 mm]
Diameter	0.688 in [17.48 mm]

Cable

Cable Type	RG108
Impedance	78 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Tin
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.235 in [5.97 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable 50 cm Length Using 78 Ohm RG108 Coax , LF Solder PE3W09940LF-50CM](#)



BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable
50 cm Length Using 78 Ohm RG108 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W09940LF-50CM

Connectors

Description	Connector 1	Connector 2
Type	BNC Twinax Jack	BNC Twinax Jack Bulkhead
Specification	MIL-STD-348	MIL-STD-348
Impedance	78 Ohms	78 Ohms
Contact Material and Plating	Silver	Silver
Contact Plating Specification	QQ-S-365	QQ-S-365
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	QQ-N-290	QQ-N-290

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable 50 cm Length Using 78 Ohm RG108 Coax , LF Solder PE3W09940LF-50CM](#)



**BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable
50 cm Length Using 78 Ohm RG108 Coax , LF Solder**

RF Cable Assemblies Technical Data Sheet

PE3W09940LF-50CM

How to Order

Part Number Configuration:

PE3W09940LF

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W09940LF-12 = 12 inches long cable
PE3W09940LF-100cm = 100 cm long cable

BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable 50 cm Length Using 78 Ohm RG108 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable 50 cm Length Using 78 Ohm RG108 Coax , LF Solder PE3W09940LF-50CM](https://www.pasternack.com/bnc-twinax-jack-bnc-twinax-jack-rg108au-cable-assembly-pe3w09940lf-50cm-p.aspx)


URL: <https://www.pasternack.com/bnc-twinax-jack-bnc-twinax-jack-rg108au-cable-assembly-pe3w09940lf-50cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W09940LF-50CM CAD Drawing

BNC Twinax Jack to BNC Twinax Jack Bulkhead Cable 50 cm
Length Using 78 Ohm RG108 Coax , LF Solder

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/16/2020	S. ELLIS

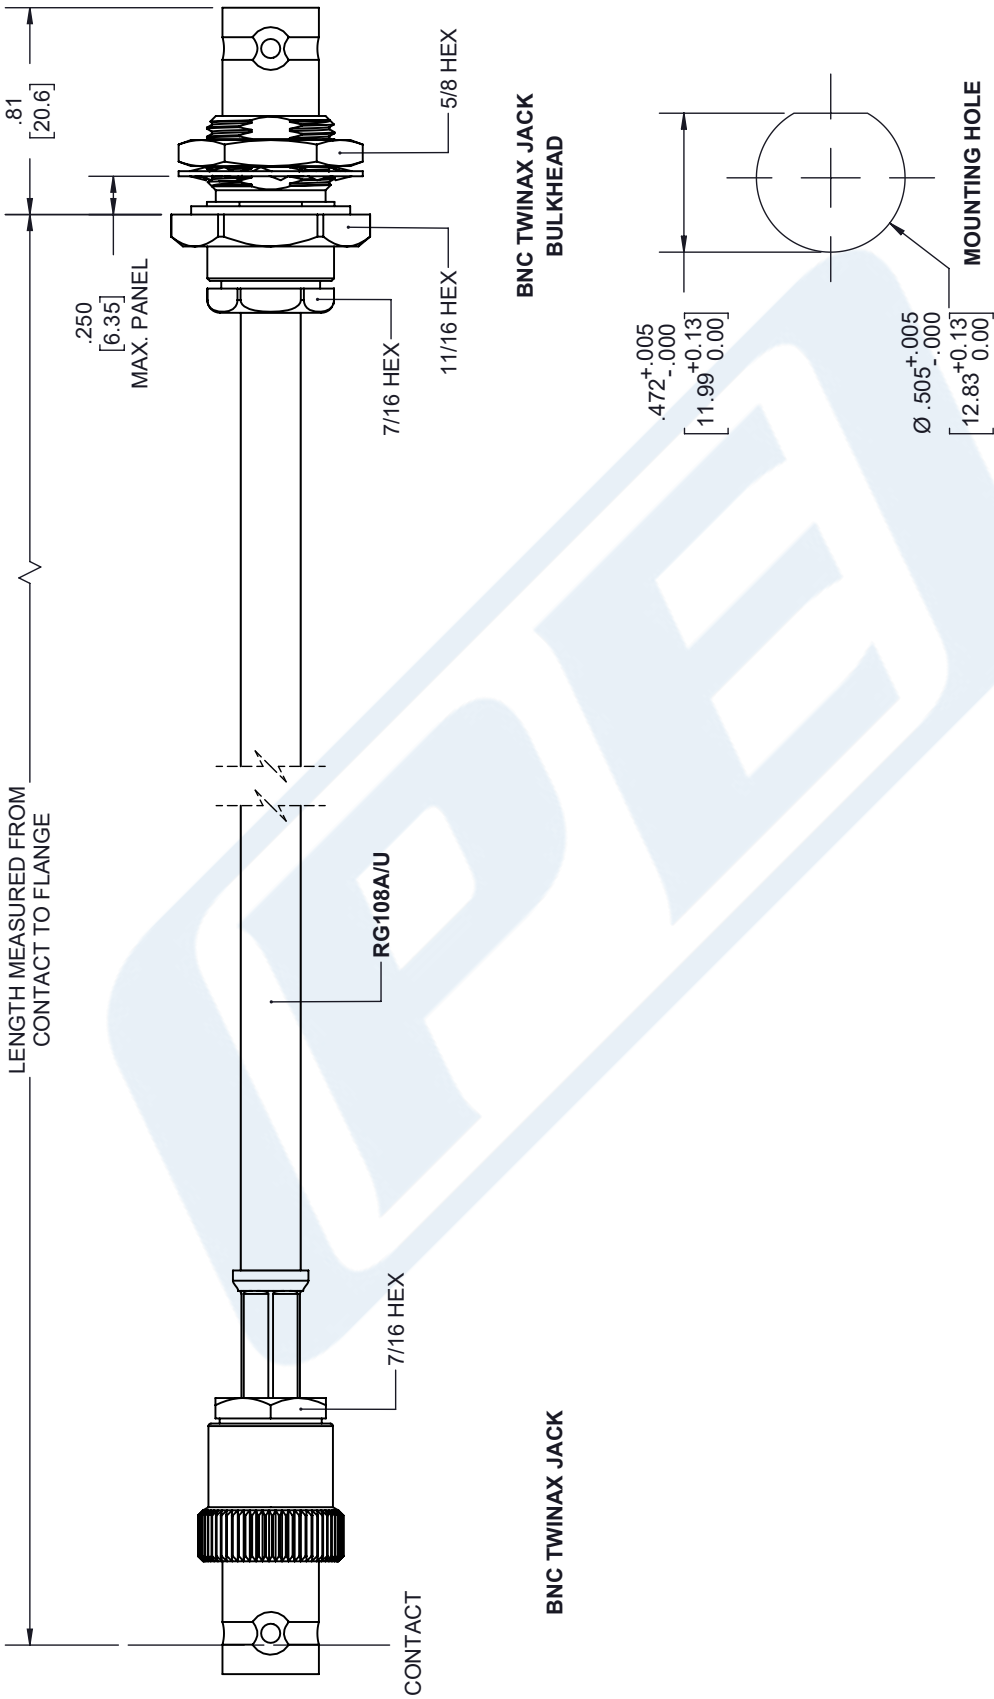

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ± .2	[.008]	FRACTIONS
.XX = ± .02	[.51]	± 1/32
.XXX = ± .005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	± .1 [25]	/ -0
12 [305] < L ≤ 60 [1524]	± .2 [51]	/ -0
60 [1524] < L ≤ 120 [3048]	± .4 [102]	/ -0
120 [3048] < L ≤ 300 [7620]	± .6 [152]	/ -0
300 [7620] < L	± 5%	/ -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PE PASTERNAK
an INFINITE brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

SIZE A CAGE CODE 53919 DRAWN BY K.DANG ITEM NO. PE3W09940LF REV A

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.